
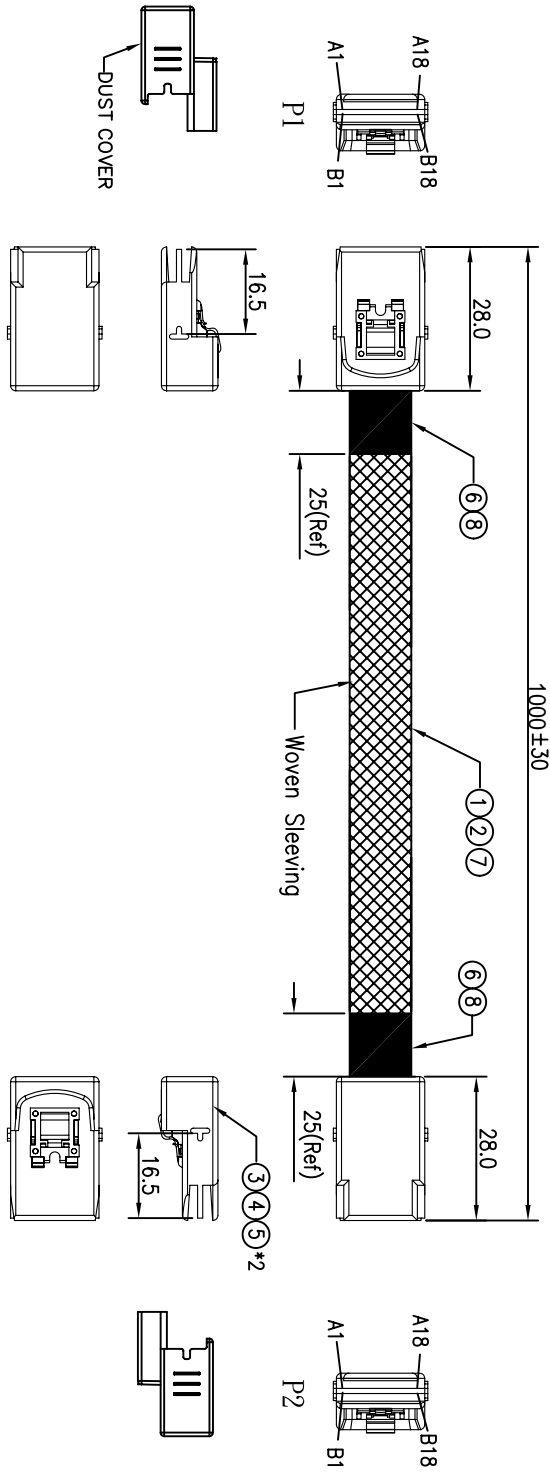


CUSTOMER	CUST P/N	P/N
----------	----------	-----

RoHS Compliant

REV	ZONE	LTR	DESCRIPTION	DATE	REVISER	APPD
-----	------	-----	-------------	------	---------	------

**PIN ASSIGNMENT:**

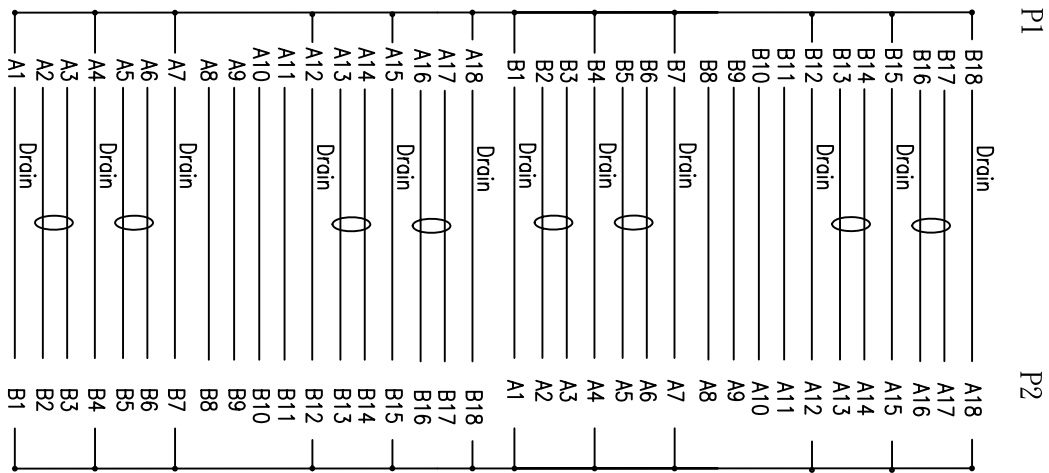

- ELECTRICAL CHARACTER:**
- a. 100% OPEN&SHORT TESTING
  - b. WITHSTANDING VOLTAGE:DC 300V 0.01Sec
  - c. INSULATION RESISTANCE:10M Ohm(Min)
  - d. CONDUCTIVE RESISTANCE:5 Ohm(Max).

8	ACETATE TAPE	BLACK ACETATE TAPE			
7	TUBE	WOVEN SLEEVING TUBE BLACK			
6	H.S.T	HEAT SHRINK TUBE BLACK ID: 9.5mm			
5	INNERMOLD	PE LOW DESNIGE			
4	OVERMOLD	PBT BLACK			
3	CONN	MINI SAS 4i PLUG CONNECTOR W/LATCH W/PCB			
2	CABLE 2	UL2678 28AWG*8C			
1	CABLE 1	(30AWG*2C+2D)*AL.MYLAR+MYLAR W/O JACKET			
NO. PART NAME		SPEC DESCRIPTION	REMAKE		
INNERMOLD		TOLERANCE UNSPECIFIED			
		ANGLE			
OVERMOLD					
DRAWN: Joshua 09/10/08		NAME	Deconn International Limited		
DESIGNER: Jim		SCALE	NON	UNIT	mm
CHECKED: Kris		Mini SAS 4i Plug to Mini SAS 4i Plug			
APPROVED: Dived		DRAWING NO.	SHEET 1/1		
		REV	1.0		