

GE Z-Wave Portable Smart Motion Sensor



Specifications

Power: 2 x CR123A Batteries or Micro USB

Signal Frequency: 908.4/916

Range: Up to 150 feet from controller or closest Z-Wave device

Operating Temperature: 32-104° F (0-40° C)

Warranty: 2-year limited product warranty

For indoor use only.

Design Features

· Remote Monitoring

Monitor doors from a distance with smartphones or tablets*

· Trigger Automations

Activate scenes or lights when door is opened or closed

· Sends Alerts

Be notified when activity is detected

· Dual Power Options

Runs for up to 2 years using CR123A batteries (included) or use the Micro USB port (cable not included)

· OTA (Over-the-Air)

Updateable Utilizes the Z-Wave Firmware Update Meta Data command class for standardized wireless firmware updates

· Visit <http://www.ezwave.com/hubs/> for hub compatibility

· Trilingual Instruction manual – (English, French, Spanish)

Z-Wave Plus Features

- Works with Z-Wave Classic and Z-Wave Plus Products
- 50% more wireless range
- 250% faster processor
- 400% more memory
- 50% more energy efficient
- Supports wireless upgrades to future-proof your home


* Requires Z-Wave hub or controller, functions may vary depending on brand.

Mounting hardware included



Detection Zone

The Smart Motion Dimmer covers up to a 180° range, up to 45 feet away. It's effective in small or large rooms.

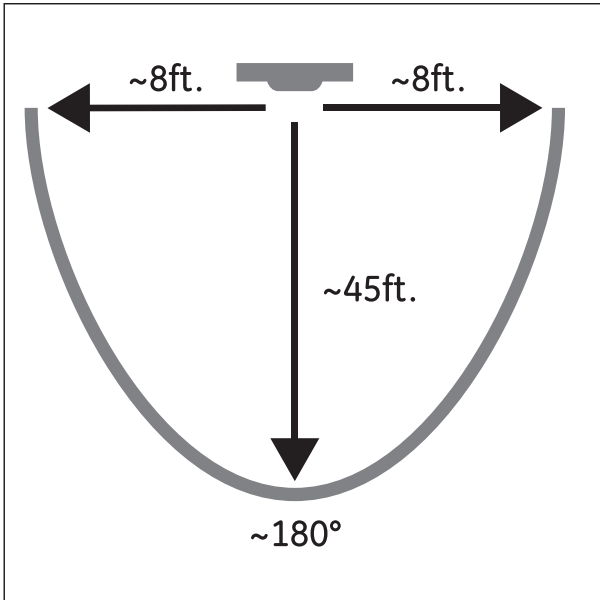

Tabletop, Wall or Ceiling Mount

Ball joint positions motion sensor at any angle.



Device Configuration

Adding your device to a Z-Wave network

Once the hub is ready to add your smart motion sensor, press and release button on the smart motion sensor to add it in the network.

To remove and reset the device

Once the controller is ready to remove your device, press and release the button on the smart motion sensor to remove it from the network.

To return to factory defaults

Press the button 10 times within 6 seconds (interval between presses cannot be longer than 1 second). Blue LED will blink for 3 seconds to signal a successful reset.

Certifications & Compliances



Compliances, specifications and availability are subject to change without notice

Distributed by Jasco Products Company LLC
10 E. Memorial Rd., Oklahoma City, OK

©Jasco 2018

Related GE Z-Wave Products



32563
Hinge Pin Smart
Door Sensor



35931
Smart LED
Bulb



26931
In-Wall Smart
Motion Switch



26933
In-Wall Smart
Motion Dimmer