

[ABOUT MX
ANYWHERE 2](#)[CONNECT
NOW!](#)[SET UP
CONNECTIONS](#)[FEATURES](#)[COMPATIBILITY](#)[BACK TO
PRODUCT
\(/EN-
US/PRODUCT/11885?
CRID=7\)](#)

ABOUT MX ANYWHERE 2

Logitech MX Anywhere 2 Wireless mobile mouse is a lightweight wireless mouse that sets new standards for performance and precision in a mouse you can take with you.

Connect with up to three devices using Logitech's tiniest receiver—the Pico Unifying™ receiver—or Bluetooth® Smart wireless technology; then switch between your Mac, PC, or Microsoft Surface with the touch of a button.

Use the scroll wheel to navigate in click-to-click mode or in a hyperfast mode that's perfect for long documents or web pages. Convenient back and forward buttons give you even greater control.

The compact MX Anywhere 2 is the ideal combination of comfort and portability—at home, at work, and on the go. Darkfield™ Laser Tracking gives you flawless control on virtually any surface, including glass (4 mm minimum thickness) and other high-gloss materials.

Unlock all the possibilities MX Anywhere 2 offers by installing Logitech Options™ software. In addition to optimizing the mouse for your operating system, the software lets you customize MX Anywhere 2 buttons and actions to fit your needs.


Logitech Options

Note: Descriptions of features that require installation of Logitech Options are tagged with a blue badge.

THE MX ANYWHERE 2 AT A GLANCE



CONNECT NOW!

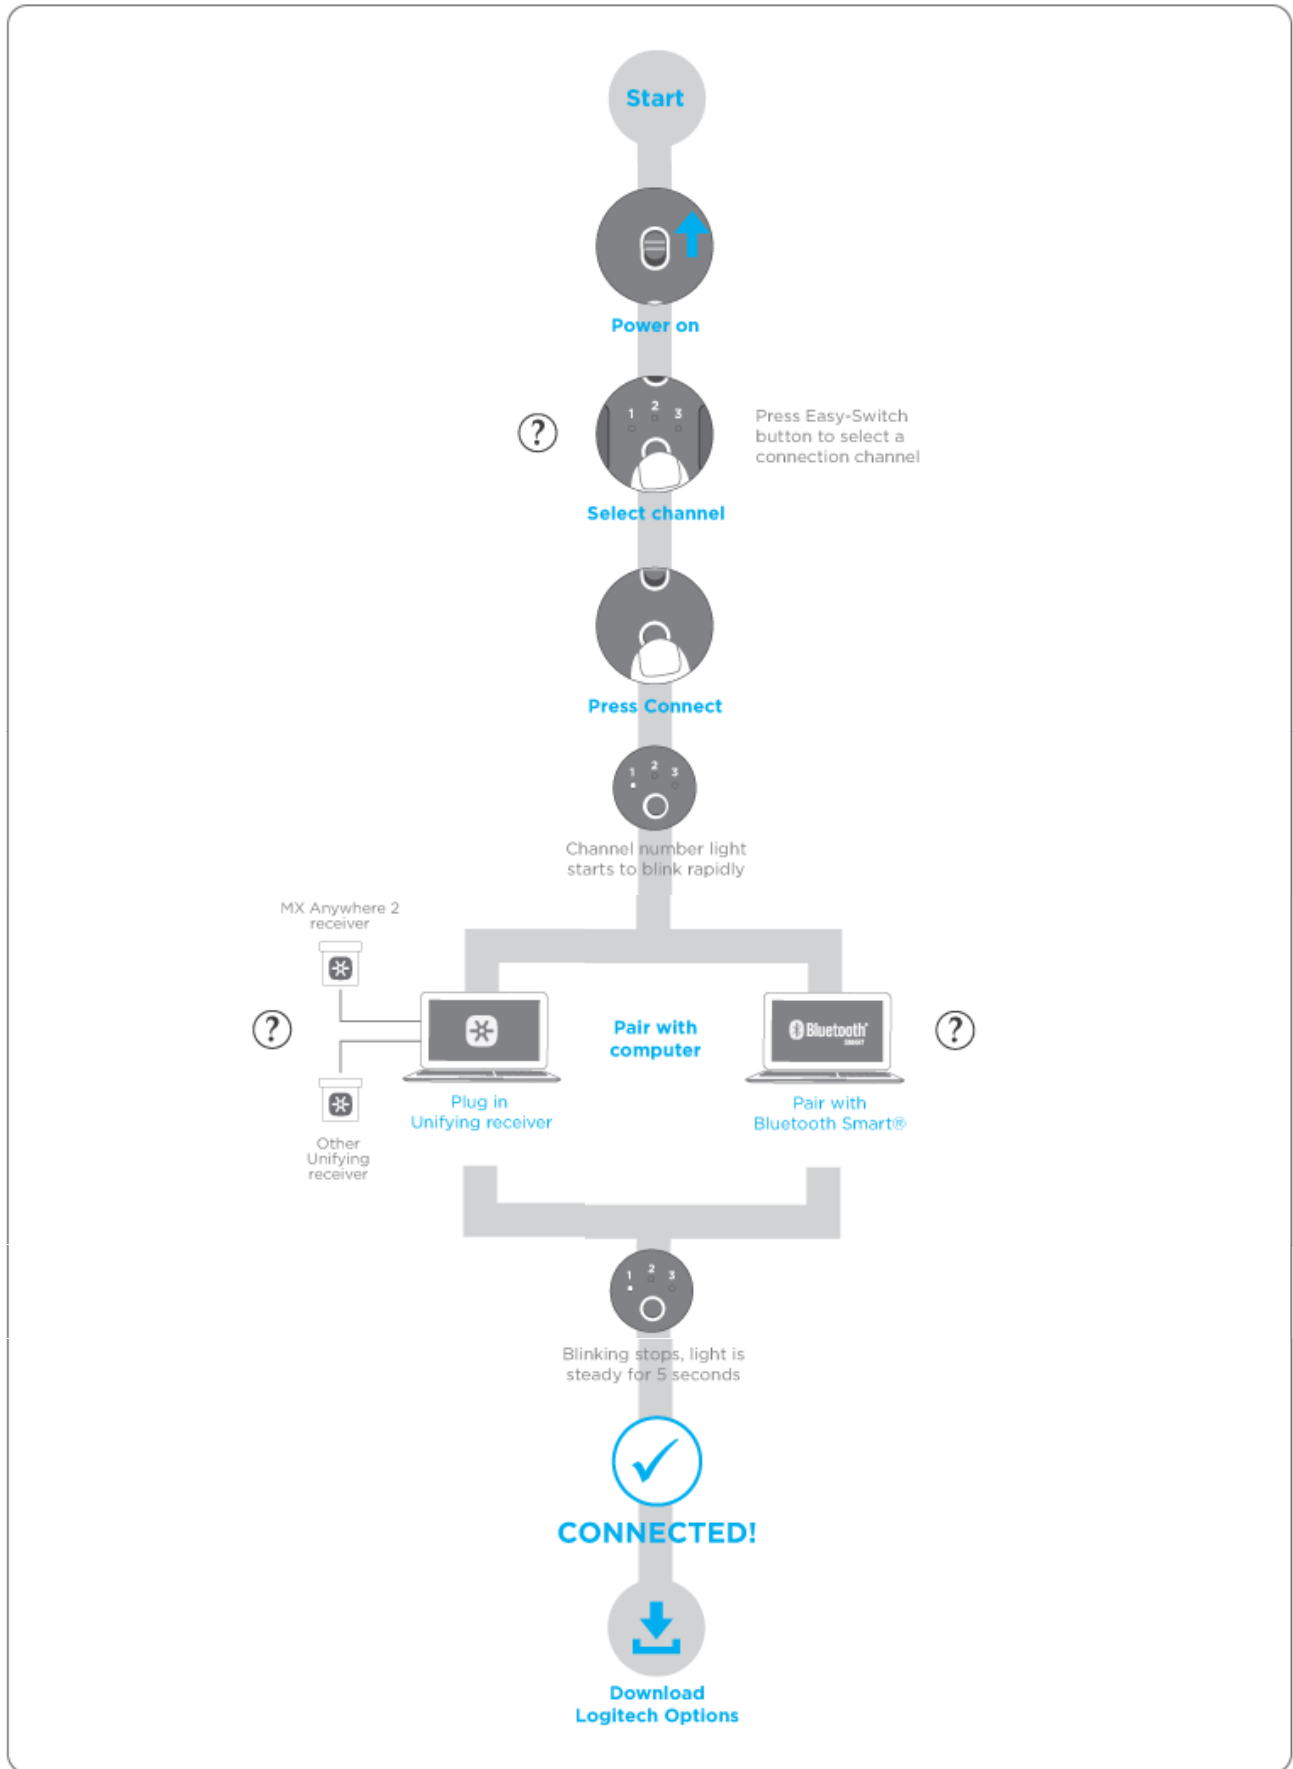

(<http://support.logitech.com/option/download>)

SET UP CONNECTIONS

The MX Anywhere 2 mouse gives you two options for making wireless connections: Logitech Unifying (a receiver is included with the mouse) and Bluetooth Smart wireless technology.

Make a Unifying connection

Pair with the provided Unifying receiver

1. Press the Easy-Switch button to select a channel.
2. Press the Connect button.

The channel number light starts blinking rapidly to indicate the mouse is ready for pairing.

3. On the computer, plug the Unifying receiver into a USB port.

Upon pairing, the selected channel number light on the mouse stops blinking and remains steady for 5 seconds. (A slowly blinking light means the mouse was unable to complete the connection.)

The mouse and computer remain connected on this channel until you connect to the same computer on a different channel or use the same channel to connect to a different device.

Pair with another Unifying receiver

1. Download and install Logitech Unifying software (<http://support.logitech.com/software/unifying>).
2. Press the Easy-Switch button to select a channel.
3. Press the Connect button.

The channel number light starts blinking rapidly to indicate the mouse is ready for pairing


4. On the computer, plug the Unifying receiver into a USB port and follow the onscreen instructions for completing the pairing.

Upon pairing, the selected channel number light on the mouse stops blinking and remains steady for 5 seconds. (A slowly blinking light means the mouse was unable to complete the connection.)

The mouse and computer remain connected on this channel until you connect to the same computer on a different channel or use the same channel to connect to a different device.

Connect with Bluetooth Smart wireless technology

Mac OS X

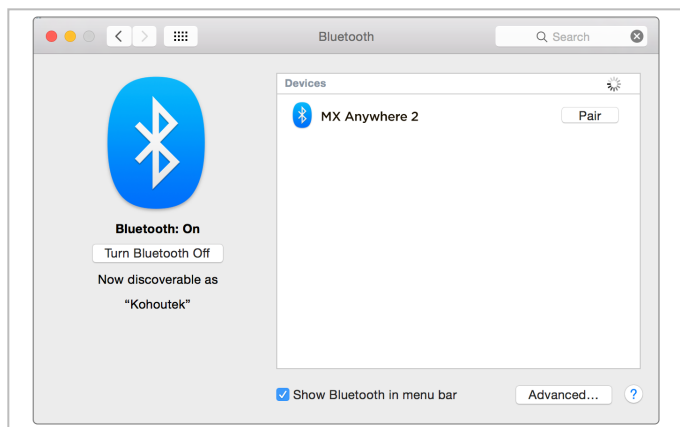


On the mouse

1. Press the Easy-Switch button to select a channel.
2. Press the Connect button.
The channel number light starts blinking rapidly to indicate the mouse is ready for pairing.

On the device

1. Open System Preferences and click Bluetooth.
2. In the Devices list, select MX Anywhere 2 and click Pair.
3. Follow the onscreen instructions to complete the pairing.
Upon pairing, the selected channel number light on the mouse stops blinking and remains steady for 5 seconds.

Microsoft Windows 8

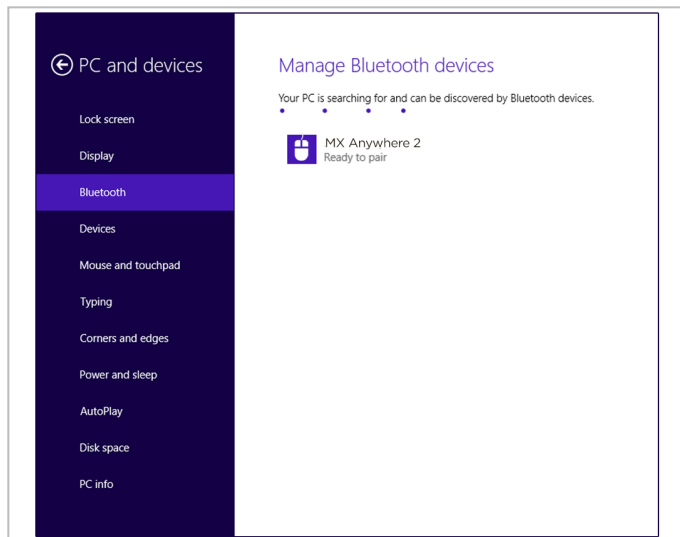

On the mouse

1. Press the Easy-Switch button to select a channel.
2. Press the Connect button.
The channel number light starts blinking rapidly to indicate the mouse is ready for pairing.

On the device

1. Go to Settings and click PC and devices.
2. Select Bluetooth.
3. In the list of Bluetooth devices, select MX Anywhere 2 and click Pair.
4. Follow the onscreen instructions to complete the pairing.
Upon pairing, the selected channel number light on the mouse stops blinking and remains steady for 5 seconds.

Add devices

After making an initial connection, you can set up other computers on the remaining channels using either Unifying or Bluetooth Smart technology. MX Anywhere 2 connects with up to three devices.

Press the Easy-Switch button to select an open connection channel. After making an initial connection, set up other computers on the remaining channels using either Unifying or Bluetooth Smart (as described earlier in SET UP CONNECTIONS). MX Anywhere 2 connects with up to three devices.

Select channels



Press the Easy-Switch button to cycle through the three channels.

◁ After setting up connections with up to three computers, switch between them by selecting the channel on which the desired device is connected.

- On the mouse, press the Easy-Switch button.

When the connection is active, the channel number light remains steady for 5 seconds.

◁ The channel number light provides information about the connection.

If the light is...	MX Anywhere 2 is...
Steady	Connected
Blinking (fast)	Ready for pairing
Blinking (slow)	Unable to complete connection

Troubleshoot the connection

FEATURES

Explore the advanced features your new mouse offers.

Hyperfast scrolling

Back/forward

Gestures

Power management

Darkfield sensor



Logitech Options

Enhance your mouse with Logitech Options

Discover all your mouse can do: add Logitech Options software.

In addition to optimizing the mouse for your operating system, Logitech Options lets you reassign button functions, enable and use gestures, adjust tracking speed, and much more. Logitech Options is available for Windows (7, 8, or later) and Mac OS X (10.8 or later).

Install Logitech Options: Mac or Windows (<http://support.logitech.com/software/options>)

Hyperfast scrolling



Press down on the wheel to switch between two scrolling modes: hyperfast and click-to-click.

In hyperfast mode you'll fly through documents and web pages with a single spin. Click-to-click scrolling ratchets the wheel, giving you the precision you need for navigating lists, slides, and images.



Hyperfast mode Click-to-click mode

Logitech Options

Install Logitech Options to optimize the scrolling experience.

- Enable smooth scrolling
- Switch scrolling direction
- Adjust scrolling speed (Mac only)

Horizontal scrolling

Scroll wide documents and web pages by tilting the wheel right or left.



Logitech Options

Use Logitech Options software to:

- Adjust scrolling speed
- Invert horizontal scrolling direction
- Assign another action to the tilt wheel

Back/Forward




Conveniently located back and forward buttons enhance navigation and simplify tasks.

Logitech Options

Use Logitech Options software to activate the back/forward buttons (on a Mac) and assign other actions to the buttons.

Note: On a Windows computer, this feature is available right out of the box.

Back/
forward
buttons



Gestures





Logitech Options

Installation of Logitech Options transforms the middle button into a gesture button you can use to trigger gestures that simplify desktop and application management, media control, document viewing, and personalization of common tasks.

Perform a gesture

Hold down the middle button while moving the mouse left, right, up, or down.

The figure below shows gesture sets available for managing windows in Windows (7, 8, or later) and Mac OS X (10.8 or later).

Tip: Use Logitech Options to view available gesture sets and assign gestures to the middle button or to other mouse controls.



Power Management



Check battery level

The LED on top of the mouse turns red to indicate that battery power is low and it's time to change batteries.

After glowing green for 5 seconds when the mouse is powered on or waking from sleep, the LED indicates battery status.

LED color	Means
Green	20–100% charge
Red	Less than 20% charge; recharge now!

Tip: Install Logitech Options to set up and receive battery status notifications.

Recharge MX Anywhere 2

Connect one end of the provided charging cable to the Micro-USB port on the mouse and the other end to a USB power source.

The LED blinks slowly until fully charged, when it is lit steadily. (The LED shuts off when you remove the cable.)

One minute of charging gives you enough power for two hours of use. Depending on how you use the mouse, a full charge can last up to 40 days.*

* Based on six hours of daily use. Battery life may vary depending on user and operating condition.



Tracks virtually anywhere



The Darkfield™ laser sensor tracks flawlessly on virtually any surface, including glass* and other high-gloss materials.

* 4 mm minimum thickness

[Learn more about Darkfield technology \(/en-us/articles/11539\)](/en-us/articles/11539)

COMPATIBILITY

BLUETOOTH SMART READY COMPUTERS

Apple

Mac OS X (10.8 or later) on:

<<

- MacBook Air (starting mid-2011)
- Mac mini (starting late 2011)
- MacBook Pro (starting mid-2012)
- iMac (starting early 2013)

Windows

Microsoft Windows (7, 8, or later), on any computer supporting Bluetooth 4.0 or later.

If you're unsure your device is Bluetooth Smart Ready, visit the Logitech MX Anywhere 2 Mouse support page (<http://support.logitech.com/product/mx-anywhere2>) for more information on verifying compatibility.