

TURTLE BEACH
E L I T E
BOOX



dts
HEADPHONE



DOLBY
DIGITAL

Designed for




**WIRELESS NOISE-CANCELLING DTS SURROUND SOUND HEADSET
USER GUIDE**

Package Contents


For our Knowledgebase and Technical Support visit
turtlebeach.com/support




Turtle Beach
Elite 800X Headset

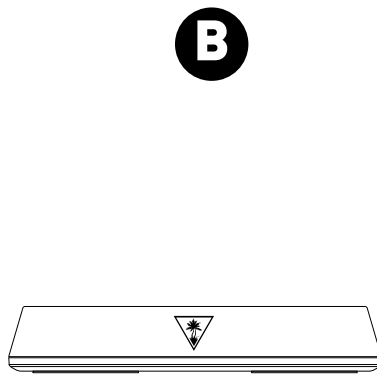


Elite 800X Transmitter & Mag-
netic Charging Stand




USB Transmitter
Cable

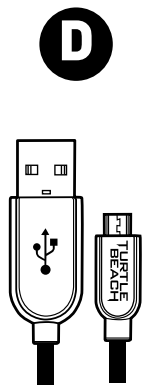

USB Programming
Cable




Mobile Cable




Digital Optical Cable



Elite 800X
Quickstart Guide



Turtle Beach Elite
Program Welcome



Elite 800X
Preset Reference



About the Elite 800X	5
Parts and controls	7
Headset Charging	10
Xbox One™ Setup	11
Wired Setup	13
Bluetooth Pairing	14
Bluetooth Operation	15
Pairing the Headset and Transmitter	16
Active Noise Cancellation	17
Adjusting the Sound	18
Firmware Upgrades and Personalization	21
Replacing Rocker Plates	22
Specifications	23
Troubleshooting tips	24
Important safety information	26
Regulatory Compliance Statement	27
Declaration of Conformity	28
Warranty	32

About the Elite 800X

The Turtle Beach Elite 800X is a sophisticated gaming headset designed to unlock the audio potential of games, music, movies and more. To get the most from your Elite 800X, please take a few moments to review this introduction.

Overview

Welcome to the future of gaming audio with Turtle Beach Elite. Powerful sound, abundant comfort and dynamic function combine to exceed your wildest expectations with the Turtle Beach Elite 800X. Uncompromising, the Elite 800X is the ultimate in completely wireless Xbox One noise-cancelling, surround sound gaming audio.



Silence is Golden

Eliminate unwanted distractions with Active Noise Cancellation in console and mobile modes.



Crystal Clear Wireless

Intelligent channel-hopping for an interference-free wireless experience.



DTS Headphone:X 7.1 Surround Sound

Creates an amazing, 3D 360-degree sound stage with unmatched spatial accuracy.



Enhanced DTS Surround Sound Modes & Presets

Custom DTS Surround Sound modes combine with enhanced Turtle Beach genre-specific presets to further immerse you in your favorite games, movies and music.



Hidden, High-Quality Microphones

Dual hidden microphones, with environmental presets to ensure you are always heard – regardless of your surroundings.

About the Elite 800X



Magnetic Charging Stand

Low profile magnetic charging stand keeps your Elite 800X fully charged without cables.



Never Miss a Text or Call

Pair your mobile phone to hear text notifications or take calls while gaming.



Rechargeable Battery

Built-in rechargeable battery delivers over 10 hours of wireless gaming.



Companion App

Download the Ear Force Audio Hub for Android to wirelessly control all aspects of the Elite 800X. Volume Levels, Surround Modes, Presets, and a designated Superhuman Hearing function are included along with a direct connection to the Elite Support Line for any questions you may have.



Swappable Rocker Plates

Easy-to-use rocker plates can be swapped with new designs from turtlebeach.com/speakerplates.

About the Elite 800X



Separate Volume Controls

Set your mix of game and chat volume levels right on the headset.



Stop SHOUTING!

Mic Monitoring lets you hear your own voice in the headset to avoid shouting.



Dynamic Chat Boost™

Even during loud gameplay spikes, chat volume automatically rises to ensure you never miss a command.




Easy Setup

Setup is easy from the USB and optical connections to the magnetic charging stand, which doubles as the wireless transmitter

Parts and controls

Headset Controls: Left Earcup

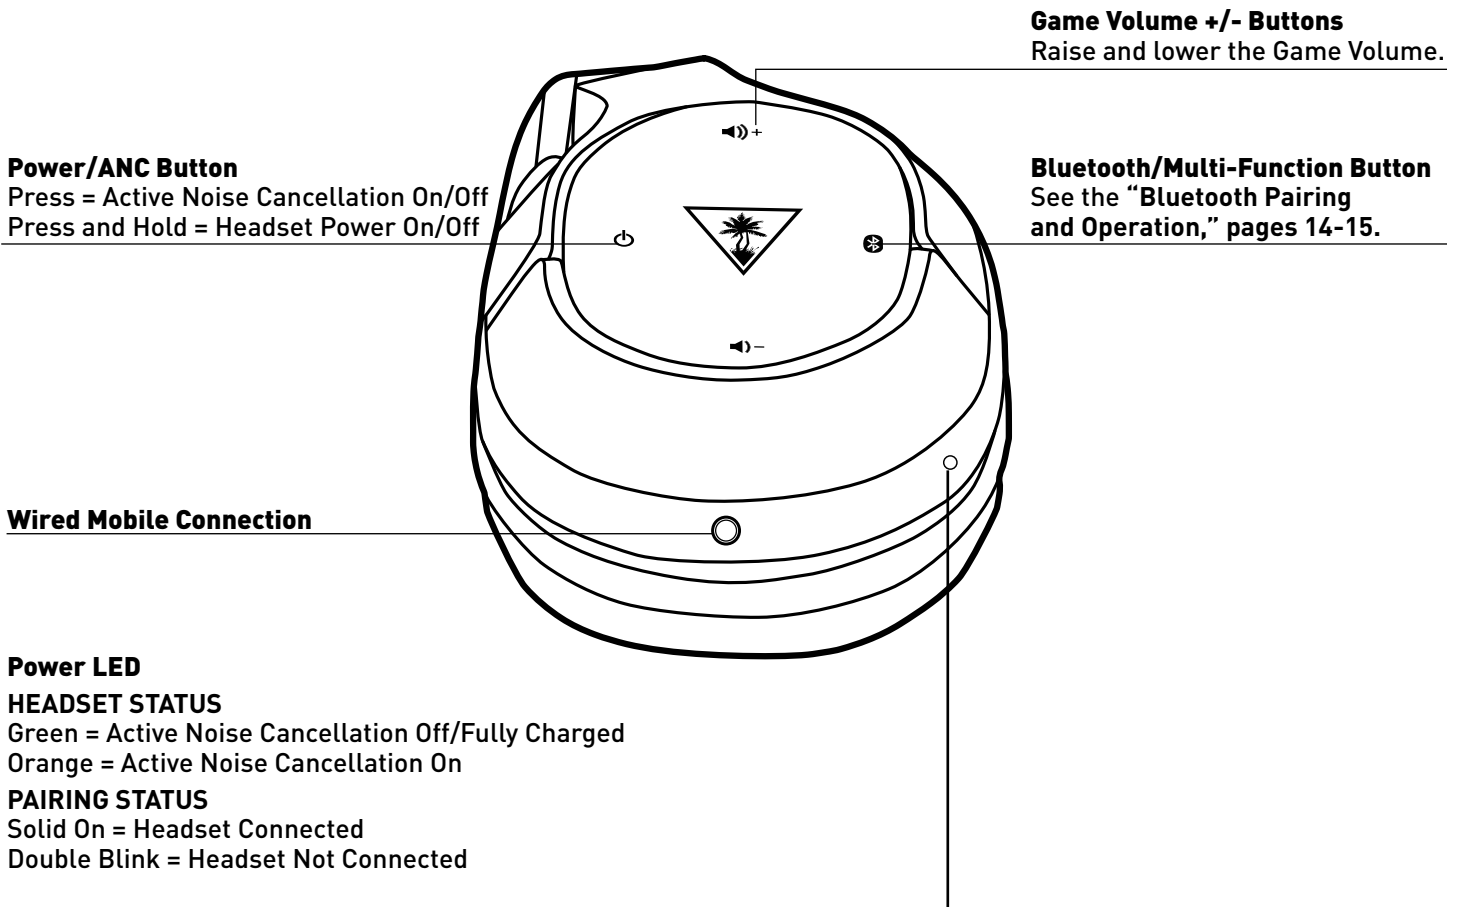

Parts and controls

Headset Controls: Right Earcup

Preset Button

Press = Cycle through Turtle Beach Signature Audio Presets. A voice prompt in the Headset will confirm your selection.

Press and Hold = Cycle through DTS Headphone:X Surround Modes. A voice prompt in the Headset will confirm your selection.

Bluetooth Status LED

AUDIO MODE

Green = Call Mode (HSP)
Orange = Stereo Mode (A2DP)

PAIRING STATUS

Single Blink = Headset Connected
Double Blink = Headset Not Connected

Chat Volume +/- Buttons


Raise and lower Chat Volume

Mic Mute Button

Press = Mic On/Off. A high tone in the Headset will confirm Mic On. A low tone will confirm Mic Off.

Press and Hold = Cycle through Mic Presets. Quiet Room > Normal Room > Loud Room > Outdoor.

A voice prompt in the Headset will confirm your selection. For more information, see **"Adjusting Sound," page 18.**

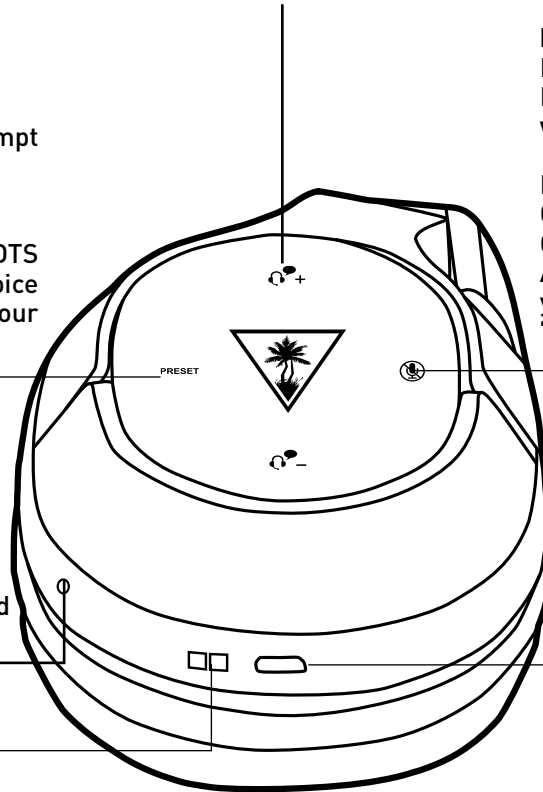





USB Charging/Update Port.

For more information, see **"Headset Charging," page 10.**

Charging Contacts

DTS Headphone:X Surround Modes

GAME MODE	MOVIE MODE	MUSIC MODE	SURROUND OFF
 <ul style="list-style-type: none"> · Signature Sound · Shooter · Racing · Sports · Superhuman hearing · Footstep Focus 	 <ul style="list-style-type: none"> · Signature Sound · Action · Horror · Drama 	 <ul style="list-style-type: none"> · Signature Sound · Stadium · Acoustic · Drama 	 <ul style="list-style-type: none"> · Natural Sound · Bass Booster · Bass & Treble Booster · Vocal Booster

*Surround Modes only available when paired to the transmitter.

Parts and controls

Transmitter: Front

Bluetooth Status LED

CHARGING STATUS


Red = Headset Seated on Transmitter

Green = Headset Not Seated on Transmitter

PAIRING STATUS

Solid On = Headset Wirelessly Connected


Double Blink = Headset Not Connected

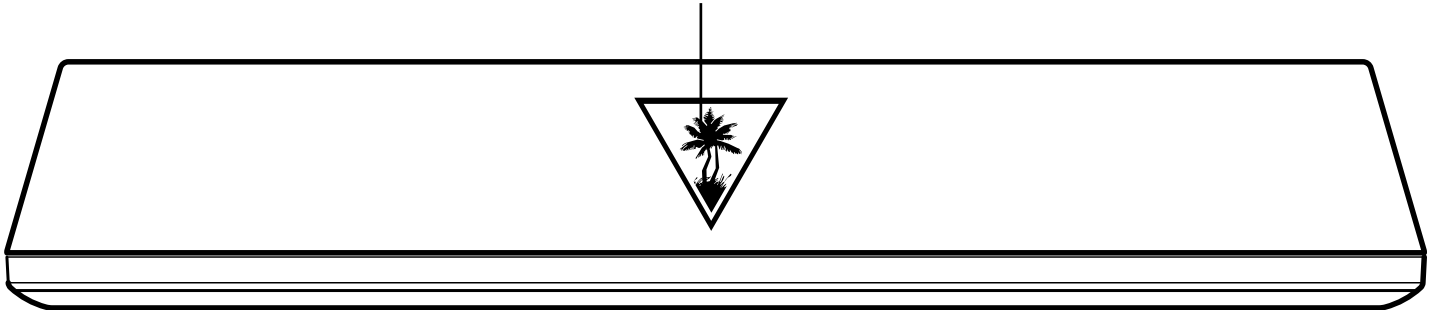

Transmitter: Back

Power and Chat USB

Pairing Button
To initiate pairing, in the unlikely event that it becomes necessary. See **“Pairing the Headset and Transmitter,”** page 16.

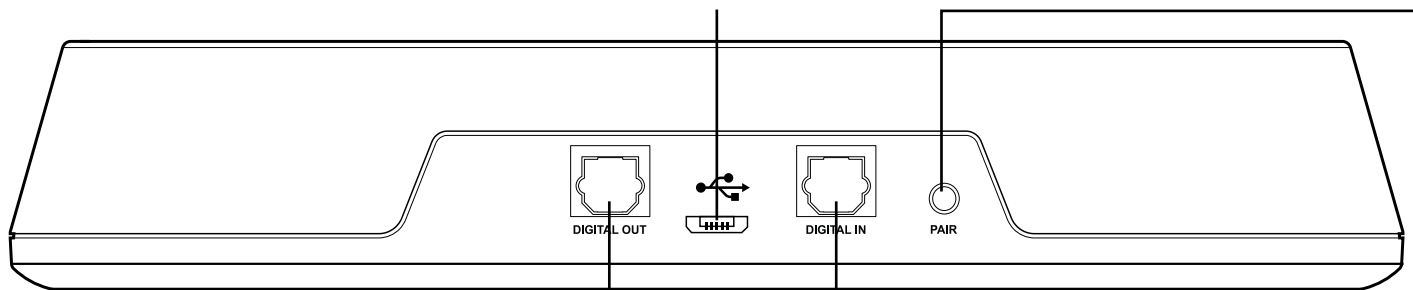

Digital Optical Audio Input


For connection to your Console

Digital Optical Audio Out

For audio pass-through to a television or external audio system.

Headset Charging

Even when the Elite 800X operates via wired connection to mobile devices, it can still use the internal amplifier and so requires power from its rechargeable battery. When charging, the Transmitter LED will glow Red.

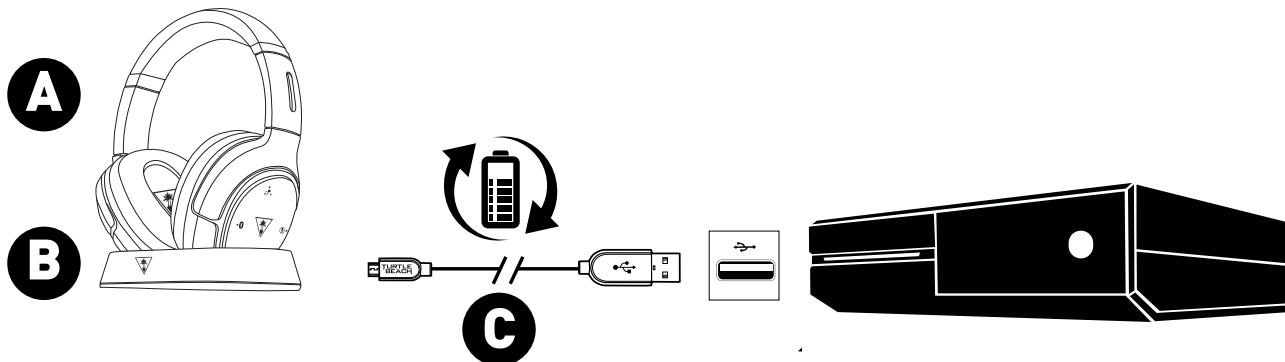


1. Connect the Elite 800X Transmitter to the Xbox One with the USB Transmitter Cable.

2. Place the Headset on the Transmitter. Align the charging contacts on the right earcup of the Headset with the charging pins on the right side of the Transmitter.

NOTE: The Status LED on the front of the Transmitter will turn Red when the Headset is properly seated on the Transmitter. If the Status LED is Green or Orange, remove the headset from the base, wait 10 seconds and place the headset back onto the transmitter.

.....

It is also possible to recharge the Headset during game play, with the use of a third-party USB-A-to-micro-USB cable, sold separately. We recommend a cable of sufficient length for comfortable game play.

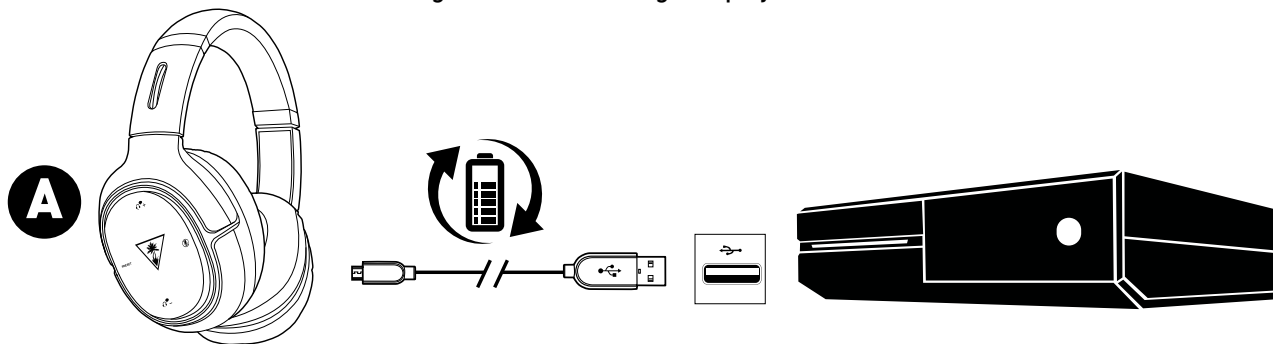




1. Connect the Elite 800X Headset to the Xbox One with a USB Micro Charging Cable.

NOTE: The Power LED on the Headset does not indicate charging status when you recharge via USB cable.

WARNING: Never fully deplete the battery then put the unit in storage, as this may cause irreversible damage to the battery. Following these simple guidelines will ensure that your Turtle Beach wireless headset will provide many hours of enjoyment.

NOTE: In order to achieve and maintain optimal battery performance for your Turtle Beach wireless headset, proper care is required when charging and storing. Always charge the battery before storing the unit for more than 3 months! Never store the unit in temperatures above 113°F/45°C. Store the headset at room temperature (72°F/22.5°C) and at humidity below 75%.


Xbox One Setup

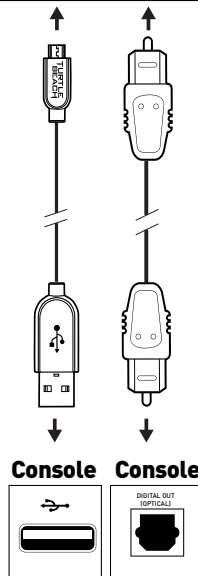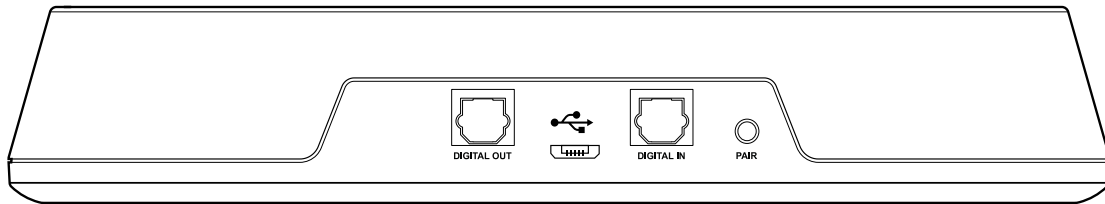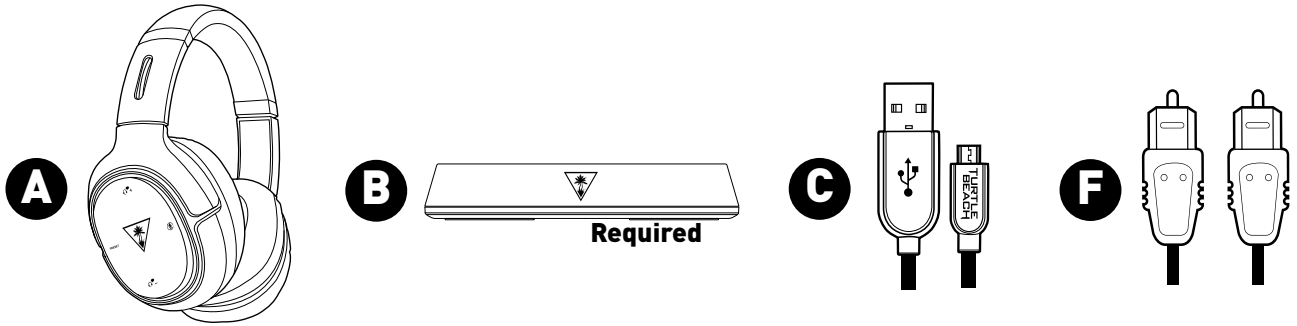


Make sure the Xbox One is fully powered on and signed into a Xbox Live profile before connecting the Transmitter for the first time.

Note: Remove the clear plastic caps from the ends of the Digital Optical Cable before connecting.


Xbox One Setup

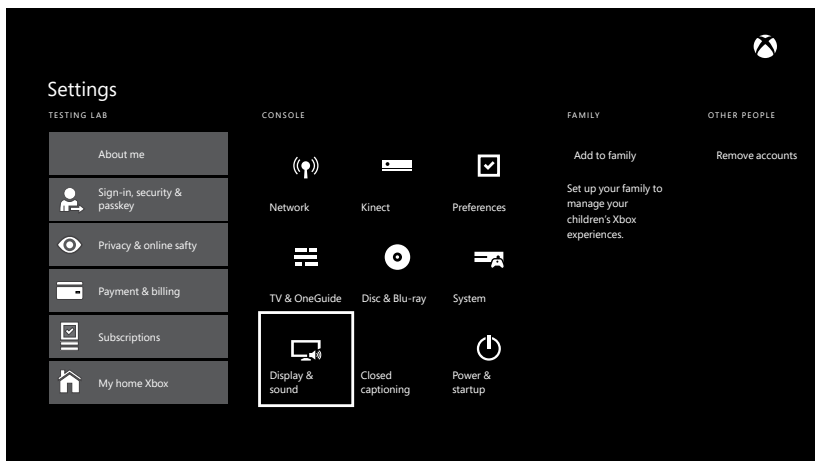

1. Go to the Xbox One Home Screen and Pres the **X** button on the Xbox One Controller.

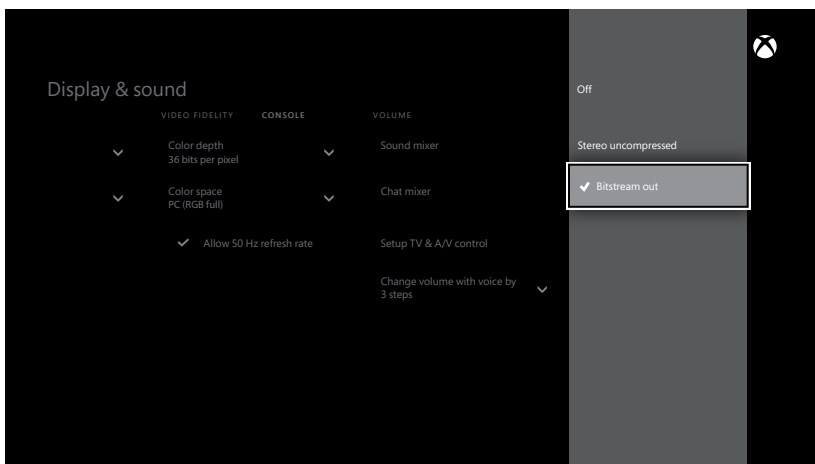

2. Go to Settings > Display & Sound > Optical Audio, Select Bitstream Out

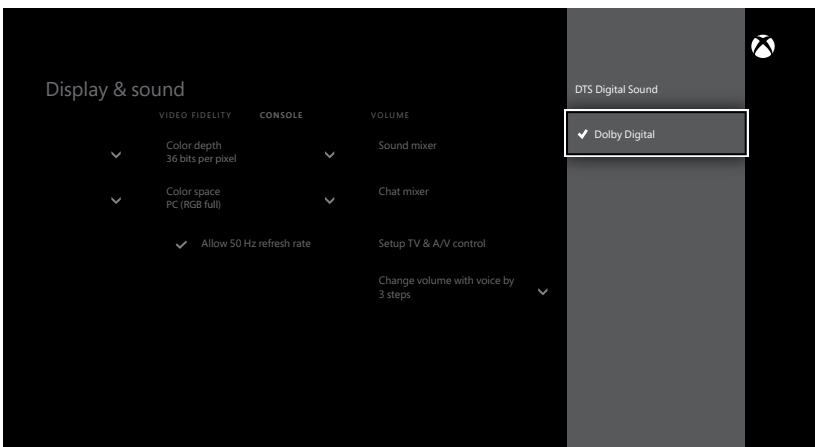

3. Go to Settings > Display & Sound > Bitstream Format, Select Dolby Digital


Note: Do NOT select DTS Digital Sound. The Elite 800X is designed to accept Dolby Digital content for the best possible audio experience.

Wired Setup

The Turtle Beach Elite 800X is equipped to take advantage of game audio, music and video sound tracks from portable devices, including laptops, tablets, mobile phones and handheld gaming consoles, via the supplied Mobile Cable.


Connect one end of the Mobile Cable to the Mobile Connection on the left earcup of the Headset and the other end to the headphone jack of your mobile device.

NOTE: You can continue to enjoy stereo audio via wired connection, even when the Headset power is off. When the Headset power is on, you can also take advantage of the built-in microphones and Active Noise Cancellation.

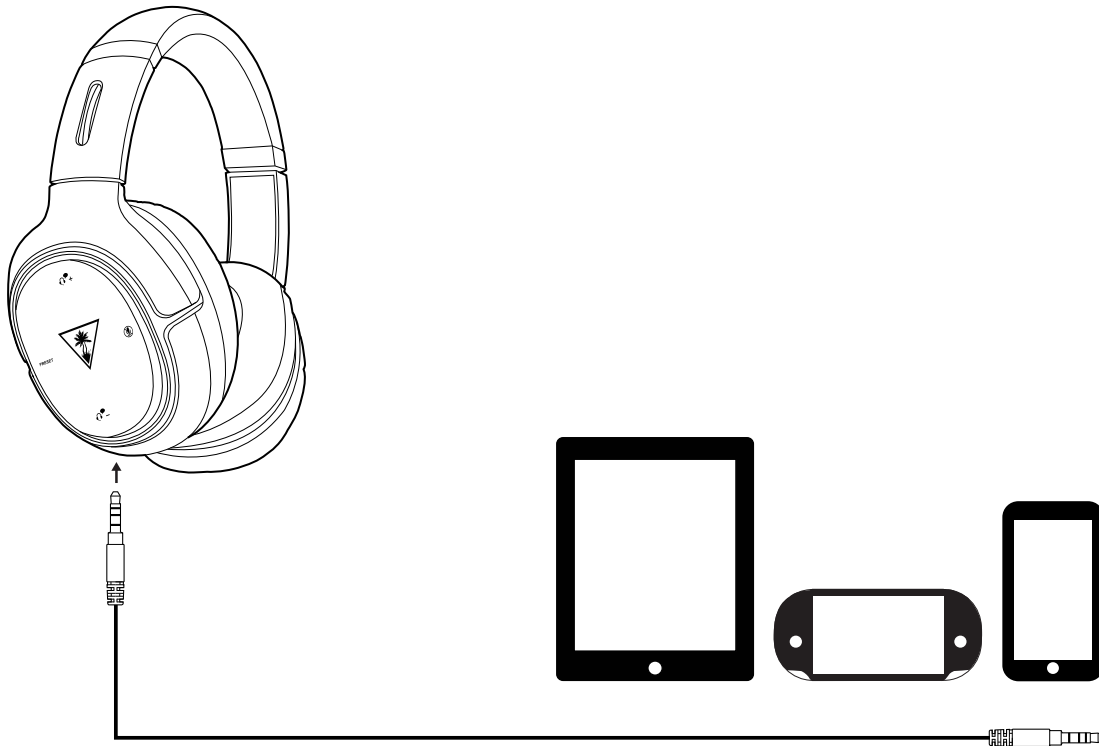


Bluetooth Pairing


While the supplied Mobile Cable gives you wired connection to mobile devices, the Bluetooth feature enables wireless connections (HSP + A2DP). Enjoy the Turtle Beach Elite 800X with compatible mobile devices, such as tablets, smartphones and the handheld gaming devices.

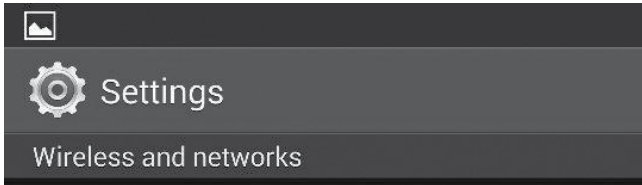

1. Power on your mobile device and go to Settings > Wireless and Networks, or the equivalent.

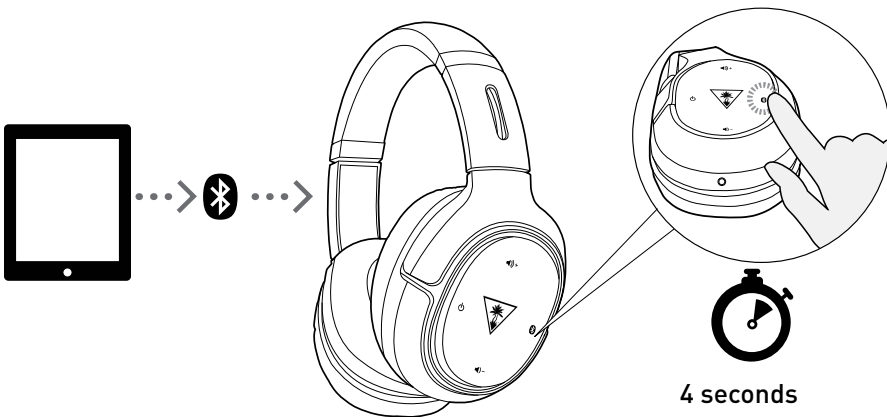


2. Power on the Elite 800X Headset. Press and hold the Bluetooth/Multi-Function button on the left earcup for four seconds.

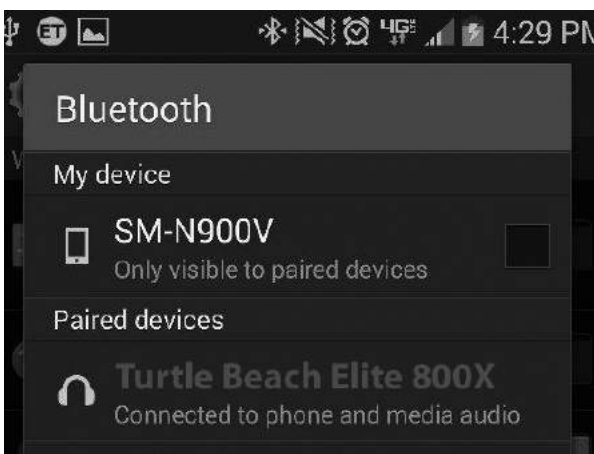

3. On your mobile device, select Turtle Beach Elite 800X from the list of available Bluetooth devices and complete pairing.

Bluetooth Operation

The effect of the Bluetooth Multifunction Button varies depending on whether you're in call mode or stereo mode.

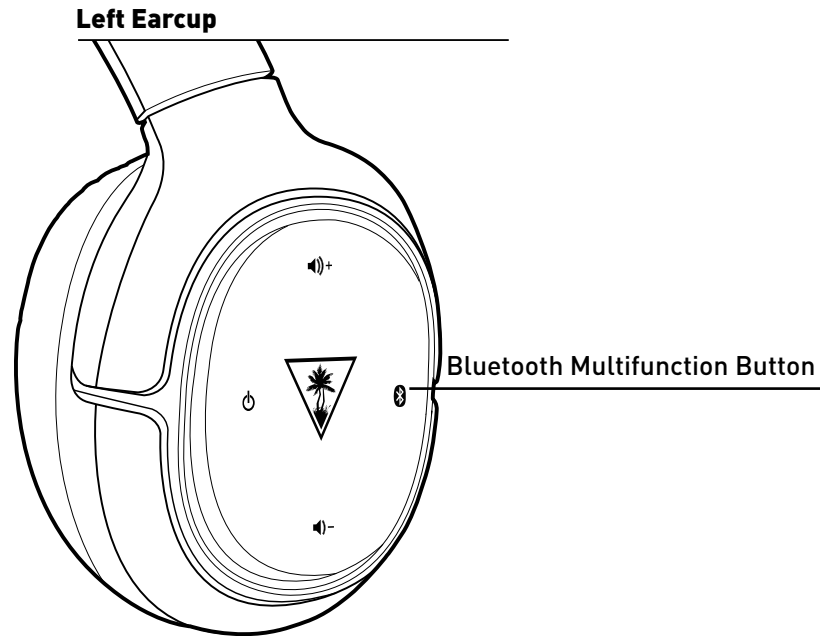

Action	Call Mode	Stereo Mode
Single Press	Answer/End call	Play/Pause
Double Press	Redial	Next Track

In addition, three buttons on the right earcup change function when you're using the Elite 800X exclusively via Bluetooth connection. **NOTE:** Functionality may vary by connected Bluetooth device.

Right Earcup

Chat Volume Up Button


Short Press = Next Track
Long Press = Previous Track

Preset Button

Short Press = Cycle through EQ Presets:
Signature Sound > Bass Boost
Bass & Treble Boost > Vocal Boost


Chat Volume Down Button

Short Press = Play/Pause

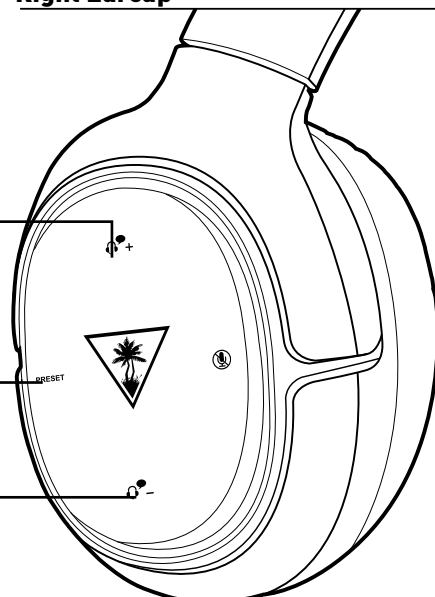


Pairing the Headset and Transmitter

The Elite 800X Headset and Transmitter come paired out of the box. When paired, with both the Headset and Transmitter powered on, the Transmitter's LED will be on solid (lit, but not blinking). However, if your Transmitter's LED is double-blinking, follow the steps below to pair your Headset and Transmitter.

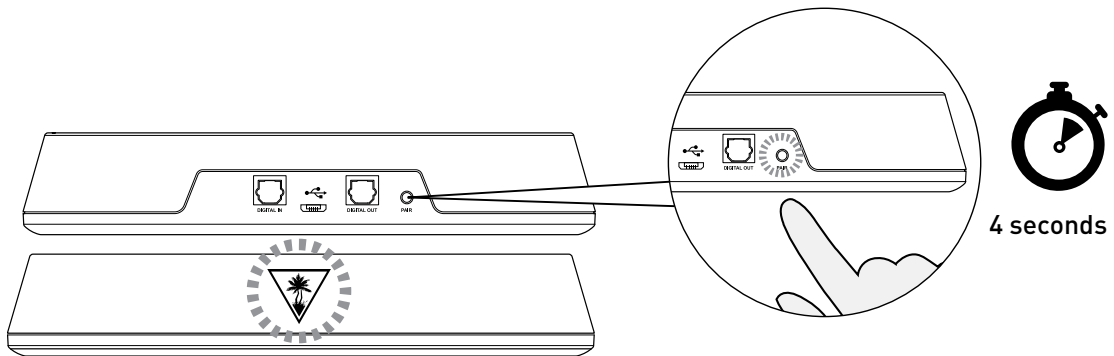

1. Start this process with the headset powered OFF. Press and hold the Pairing Button on the Transmitter until the Transmitter's Pairing LED flashes rapidly (5 seconds), then release.

2. Press and hold the Power Button on the Headset until the Headset's Power LED flashes rapidly (5 seconds), then release.

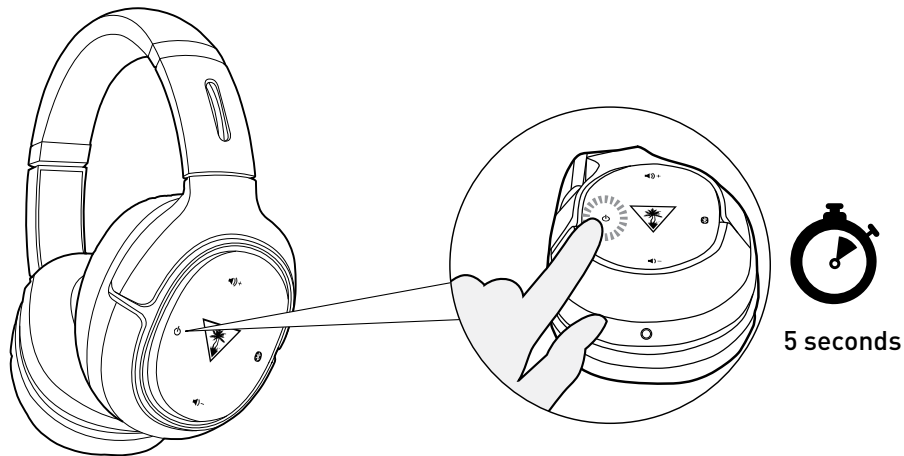

3. Within 30 seconds, the Transmitter and Headset's LEDs will remain Solid, indicating that pairing has been successful.

Active Noise Cancellation

Active Noise Cancellation suppresses ambient noise, especially low-frequency noise such as aircraft engines and road noise. The system works by sensing outside noise with the built-in microphones and sending an equal-but-opposite signal into the headphones. The soft cushions of the Elite 800X also help block external sound, providing an added level of noise reduction.

- To turn on Active Noise Cancellation (ANC), with the headset on, press the Power/ANC Button. A voice prompt in the Headset will confirm your selection and the Power LED will turn Orange.
- To turn off ANC, with the headset on, press the Power/ANC Button again. A voice prompt in the Headset will confirm your selection and the Power LED will turn Green.

NOTE: To comply with safety requirements in airline use, be sure that Elite 800X Bluetooth operation is turned off.

NOTE: You can only turn Active Noise Cancellation on or off when the Elite 800X Headset itself is turned on.



Adjusting the Sound

If you want to...	Then
Adjust game/media volume.	Use the Game Volume Up/Down buttons on the left earcup of the Headset.
Adjust chat volume.	Use the Chat Volume Up/Down buttons on the right earcup of the Headset.
Turn the microphone on or off.	Press the Mic Mute Button on the Headset. A high tone in the Headset will confirm Microphone On. A low tone will confirm Microphone Off.

If you want to...	Then
Select Microphone Presets.	<p>The Headset features built-in microphones and powerful digital signal processing to optimize the sound for different environments. Press and hold the Mic Mute button to cycle through the mic presets.</p> <p>Your selection will be confirmed by a voice prompt in the Headset.</p> <p>Quiet Room. For a quiet room with no outside noise distractions. This setting features the widest field of voice pickup and natural voice fidelity.</p> <p>Normal Room. Block out normal room noises: air conditioning, fridge humming, conversations in other rooms, etc.</p> <p>Loud Room. Block out louder room noises: ceiling fan, music in other rooms, conversations in the same room, etc.</p> <p>Outdoor. Focus voice pickup around your mouth—like holding an inline mic right up to your mouth. Reduce the pickup of other sounds when talking outdoors.</p> <p>NOTE: These descriptions itemize the modes available using the initial firmware version for the Elite 800X. Upgraded or personalized headsets may have additional or revised modes not shown here.</p>
Turn Active Noise Cancelling on or off.	<p>Press the Power/ANC Button on the Headset. A voice prompt in the Headset will confirm your selection. In addition, the Headset Power LED will turn Orange when ANC is on and turn Green when ANC is Off.</p> <p>NOTE: You can only turn Active Noise Cancellation on or off when the Elite 800X Headset itself is turned on.</p>

Adjusting the Sound

If you want to...	Then
Adjust surround sound.	<p>The Elite 800X takes advantage of DTS® Headphone:X Surround Sound, which uses sophisticated processing to create surround sound using just two speakers. The system detects Dolby Digital® sound tracks from the Xbox One. The DTS system then processes these signals especially for headset playback. The system reproduces the sonic characteristics of rooms optimized for specific types of content. Press and hold the Preset Button on the right earcup of the Headset to cycle through four surround modes. Your selection will be confirmed by voice prompts in the Headset.</p> <p>Game Mode > Movie Mode > Music Mode > Surround Off (Stereo Mode)</p> <p>NOTE: These descriptions itemize the modes available using the initial firmware version for the Elite 800X. Upgraded or personalized headsets may have additional or revised modes not shown here.</p>
Select presets.	<p>For each of the DTS® Headphone:X Surround Sound modes, Turtle Beach has designed presets that optimize the sound for specific types of games, music and movies. Press the Preset Button on the right earcup of the Headset to cycle between each preset within the currently selected surround sound mode.</p> <p>Your selection will be confirmed by voice prompts in the Headset.</p> <p>NOTE: The descriptions below itemize the modes available using the initial firmware version for the Elite 800X. Upgraded or personalized headsets may have additional or revised modes not shown here.</p>
DTS Headphone:X 7.1 Surround Modes Turtle Beach Signature Presets	
SURROUND GAME MODE	<p>Signature Sound. Turtle Beach tuning places you in the middle of the action, enabling you to hear your games just as the developers intended.</p> <p>First Person Shooter. Enter the warzone fully armed. Feel your gun's recoil hit your chest. Experience the full force of explosions as you lead your squad to victory.</p>
	<p>Racing. Feel the engine underneath you and hear your opponents' cars at your back as you battle for the win.</p> <p>Sports. Put yourself in the middle of a packed stadium with fans cheering you on from every angle.</p> <p>Superhuman Hearing. Gain the ultimate audio advantage. Amplify low and faint sounds to hear everything. Pinpoint your enemies and defeat them before they know you're there.</p> <p>Footstep Focus. Focus on the sound of enemy footsteps approaching. Hear every detail and gain a true audio advantage.</p>
SURROUND MOVIE MODE	<p>Signature Sound. Turtle Beach gives you the best seat in the house. Experience your movies as never before.</p> <p>Action. Be the hero. Face the explosions. Duck the gunfire and hear the evac chopper circling overhead as you save the world again.</p> <p>Horror. Build the suspense. Hear every creaking footstep and bone-rattling scream. Just try to get out alive.</p> <p>Drama. Intensify the story and bring characters to life with pinpoint vocals and enhanced dialog.</p>

Adjusting the Sound

DTS Headphone:X 7.1 Surround Modes	Turtle Beach Signature Presets
SURROUND MUSIC MODE	<p>Signature Sound. Turtle Beach brings the music onto your personal stage. Scan your ticket for your own private concert.</p> <p>Stadium. Experience live concert music as it was meant to be heard. Feel the crowd around you as the band on stage turns it up to 11.</p> <p>Acoustic. Experience a personal concert for one: just you and your favorite artist.</p> <p>Dance. Put your hands in the air and place yourself in the middle of a nightclub as the DJ drops your favorite track.</p>
SURROUND OFF (STEREO MODE)	<p>Natural Sound. Turtle Beach tuned natural sound delivers your media just as the creators intended.</p> <p>Bass Booster. Turn up the bass. Feel the deep sound effects in your games and the punch of music tracks.</p> <p>Bass & Treble Booster. Turn up the excitement with increased highs and lows for a more powerful audio experience.</p> <p>Vocal Booster. Tune in to the vocals on music tracks and dialog in games and movies. Make characters and stories come alive.</p>
Control Bluetooth sources.	Special functions are available when you're using the Elite 800X exclusively via Bluetooth connection. For details, see " Bluetooth Operation, " page 15.

Firmware Upgrades and Personalization

Turtle Beach Windows Ear Force Audio Hub



The Elite 800X is a highly programmable, microprocessor-based headset, designed to accept firmware upgrades from the Windows and Mac Ear Force Audio Hubs.

Firmware upgrades

You can check to see that you have the latest, most advanced firmware at www.turtlebeach.com/Elite800X.

To upgrade the Elite 800X, connect the Headset to a computer using the USB Programming Cable and then connect the Transmitter using the USB Transmitter Cable. Follow the instructions on the website for downloading and upgrading the firmware.

NOTE: The operation of upgraded and/or personalized headsets may not completely match the operations described in this manual.

Turtle Beach Android Ear Force Audio Hub



Download the Ear Force Audio Hub app to wirelessly change presets on the fly using your Android™ mobile phone or tablet. Future Turtle Beach Companion Apps may provide additional opportunities to customize and control your Elite 800X headset.

www.turtlebeach.com/Elite800X

Go to Table of Contents 

Replacing Rocker Plates



Customize your headset at
www.turtlebeach.com/plates

NOTE: The availability of additional speaker plates varies by market as is subject to local restrictions.

Specifications

HEADSET

Speakers: 50 mm with Neodymium Magnets

Frequency Response: 20 Hz – 20 kHz

Earcup Design: Around-Ear (Closed)

Microphone Design: Dual Hidden Noise-Cancelling Microphones

Bluetooth: Bluetooth Radio with Dual-Pairing Mode and A2DP Compatibility

Battery: Rechargeable Lithium Polymer

TRANSMITTER

Game Input: Digital Optical (Toslink) with Digital Optical Pass-through

Chat/Mic Input/Output: USB

Surround Sound Processing: DTS Headphone:X 7.1

Wireless Connection: RF with Intelligent Channel Hopping

Wireless Range: Up to 30 ft. (9 m)

Power: USB



Troubleshooting Tips

No sound

Possible cause	Solution
Power is off	Confirm that the Headset is on. The Headset Power LED should be illuminated.
Dead/low battery	Recharge the Headset. See “Headset Charging,” page 10. NOTE: The Ear Force Audio Hub app for Android™ phones and tablets enables you to check battery status.
Game Volume turned down	Press the Game Volume Up Button on the Headset.
Loose connection	Confirm that Transmitter is firmly connected. Check that the USB Transmitter Cable and Digital Optical Cable are completely seated at both ends. In mobile use, confirm that the Mobile Cable plugs are firmly seated in the Headset and the mobile device.
Lost pairing	Confirm that the Status LED on the Transmitter stays on. If the LED is blinking, it indicates that the Transmitter isn’t communicating with the Headset. See “Pairing the Headset and Transmitter,” page 24.
Poor Wi-Fi transmission	For best performance, stay within 30 feet from the Transmitter. Confirm that there is no wall or other large object between the Headset and Transmitter. Confirm that the location of the Transmitter is clear of obstructions and isolated from Wi-Fi base stations or other potential sources of interference.

Audio Drops, Popping or Clicking Sounds

Possible cause	Solution
Poor Wi-Fi transmission	For best performance, stay within 30 feet from the Transmitter. Confirm that there is no wall or other large object between the Headset and Transmitter. Confirm that the location of the Transmitter is clear of obstructions and isolated from Wi-Fi base stations or other potential sources of interference.

Voice Chat Drops

Most in-game voice chat drops are caused by network congestion or “lag.” They usually subside after a few moments so please be patient. In extreme cases, you may need to leave the game and return to reset the chat function. If you use a wireless internet connection, low signal strength from your modem/router can make the voice chat malfunction. For best results, we recommend a wired connection from your modem/router to your Xbox One.

Troubleshooting Tips

Voice Chat Drops

Possible cause	Solution
Not selected as an Input Device	Go to Settings > Devices and make sure that the Elite 800X headset is bound to your Xbox Live Account. Voice chat can also be effected by the NAT Type Configuration of your internet connection. If your NAT Type is listed as STRICT in the Xbox One Wireless Settings we suggest that you work with Xbox Support to correct this for the best chat experience.
Mic muted	Press the Mic Mute Button on the right earcup of the Headset. A high tone in the Headset will confirm that the mic is now on.

Bluetooth not working

Try using the Bluetooth pairing instructions (see “Bluetooth Pairing” on page 22) to pair your headset to a different Bluetooth-ready mobile phone than the one you usually use. With the headset paired to the phone, call a friend/relative.

Is the person you are calling able to hear you?

Are you able to hear the person you are calling? If you're experiencing the same issue with two different phones, you will want to contact our support team via the link below.

If your issue is not resolved by these steps, please visit turtlebeach.com/support

Important Safety Information

To avoid potential damage to the device, always disconnect all cables before transporting it.

WARNING: Permanent hearing damage can occur if a headset is used at high volumes for extended periods of time, so it is important to keep the volume at a safe level. Over time, your ears adapt to loud volume levels, so a level that may not cause initial discomfort can still damage your hearing. If you experience ringing in your ears after listening with the headset, it means the volume is set too loud.

The louder the volume is set, the less time it takes to affect your hearing. So, please take care to listen at moderate levels.

- Before placing a headset on your ears, turn the volume down completely, then slowly increase it to a comfortable level.
- Turn down the volume if you can't hear people speaking near you.
- Avoid turning up the volume to block out noisy surroundings.

Regulatory Compliance Statements for the Elite 800X RX & TX Models

Federal Communications Commission (FCC) Compliance Notices

This section includes the following FCC statements for the Elite 800X RX & TX Models:

- FCC ID: XGB-TB2390 and XGB-TB2391
- Class B Interference Statement
- RF Radiation Exposure & Hazard Warning
- Non-Modification Statement
- Deployment Statement

Class B Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

RF Radiation Exposure & Hazard Statement

To ensure compliance with FCC RF exposure requirements, this device must be installed in a location such that the antenna of the device will be greater than 2 cm (0.8 in.) from all persons. Using higher gain antennas and types of antennas not covered under the FCC certification of this product is not allowed. Installers of the radio and end users of the product must adhere to the installation instructions provided in this manual. This transmitter must not be co-located or operated in conjunction with any other antenna or transmitter.

Non-Modification Statement

Use only the supplied internal antenna. Unauthorized antennas, modifications, or attachments could damage the Elite 800X RX & TX Models and violate FCC regulations. Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment. Please contact Turtle Beach for a list of approved 2.4 GHz and 5.0 GHz antennas.

Deployment Statement

This product is certified for indoor deployment only in the 5150 – 5250 MHz band. Do not install or use this product outdoors in that frequency band in the United States.

Canadian ICES Statements

IC: 3879A-2390 & 3879A-2391

This device complies with ICES-003 and RSS-210 of Industry Canada. Operation is subject to the following two conditions:

1. This device may not cause interference, and
2. This device must accept any interference, including interference that may cause undesired operation of the device.

Ce dispositif est conforme aux normes NMB003 et CNR-210 d'Industrie Canada.

1. L'utilisation de ce dispositif est autorisée seulement aux conditions suivantes :
2. il ne doit pas produire de brouillage et l'utilisateur du dispositif doit être prêt à accepter tout brouillage radioélectrique reçu, même si ce brouillage est susceptible de compromettre le fonctionnement du dispositif.

To prevent radio interference to the licensed service (i.e. co-channel Mobile Satellite systems) this device is intended to be operated indoors and away from windows to provide maximum shielding. Equipment (or its transmit antenna) that is installed outdoors is subject to licensing and not supported by Elite 800X RX & TX Models.

RF Radiation Exposure & Hazard Statement

To ensure compliance with RSS-102 RF exposure requirements, this device must be installed in a location such that the antenna of the device will be greater than 2 cm (0.8 in.) away from all persons. Using higher gain antennas and types of antennas not covered under the IC certification of this product is not allowed. Installers of the radio and end users of the product must adhere to the installation instructions provided in this manual. This transmitter must not be co-located or operated in conjunction with any other antenna or transmitter.

Exposition aux radiations RF & Mention de danger

Pour assurer la conformité avec les exigences RSS-102 d'exposition aux RF (Radio Fréquences), cet appareil doit être installé dans un endroit où l'antenne de l'appareil sera située à une distance de plus de 2 cm (0.8 po) de toutes personnes. L'utilisation d'antennes à gain plus élevé et les types d'antennes qui ne sont pas couverts en vertu de la certification IC de ce produit n'est pas autorisée. Les installateurs de la radio et les utilisateurs du produit final doivent se conformer aux instructions d'installation fournies dans ce manuel. Cet émetteur ne doit pas être co-implanté ou exploité en conjonction avec toute autre antenne ou transmetteur.

Deployment Statement

This product is certified for indoor deployment only in the 5150 – 5250 MHz band. Do not install or use this product outdoors in that frequency band in Canada.

Déclaration de déploiement

Ce produit est certifié pour le déploiement à l'intérieur tout en rencontrant les limites de cette bande de fréquences: 5150 - 5250 MHz. Ne pas installer ou utiliser ce produit à l'extérieur au Canada, si cette bande de fréquences ne peut ne peut être rencontrée



This symbol on the product or its packaging indicates that this product must not be disposed of with your other household waste. Instead, it is your responsibility to dispose of your waste equipment by handing it over to a designated collection point for the recycling of waste electrical and electronic equipment. The separate collection and recycling of your waste equipment at the time of disposal will help conserve natural resources and ensure that it is recycled in a manner that protects human health and the environment. For more information about where you can drop off your waste for recycling, please contact your local authority, or where you purchased your product.

European Union and European Fair Trade Association Regulatory Compliance

This equipment may be operated in the countries that comprise the member countries of the European Union and the European Fair Trade Association. These countries, listed below, are referred to as The European Community throughout this document:

AUSTRIA, BELGIUM, BULGARIA, CYPRUS, CZECH REPUBLIC, DENMARK, ESTONIA, FINLAND, FRANCE,, GERMANY, GREECE, HUNGARY, IRELAND, ITALY, LATVIA, LITHUANIA, LUXEMBOURG, MALTA, NETHERLANDS, POLAND, PORTUGAL, ROMANIA, SLOVAKIA, SLOVENIA, SPAIN, SWEDEN, UNITED KINGDOM, ICELAND, LICHTENSTEIN, NORWAY, SWITZERLAND

The Elite 800X RX & TX devices communicate with each other to provide wireless local area networking (WLAN) capabilities. Additionally, the Elite 800X RX device has a BT radio transceiver for communicating with users over the internet connection provided in the host platform. The Elite 800X TX Model includes one 802.11a radio with one 802.11a omni-directional internal antenna. The Elite 800X RX Model includes one 802.11a radio and one 2.4 GHz BT radio with two 802.11a and one 2.4 GHz BT omni-directional internal antennas, respectively.

Declaration of Conformity Marking by this symbol:



indicates compliance with the Essential Requirements of the R&TTE Directive of the European Union (1999/5/EC). This equipment meets the following conformance standards:

Safety: EN 60950-1: 2006 + A11: 2009 + A1: 2010 + A12: 2011 (T-Mark License)
IEC 60950-1: 2005 (2nd Edition) + Am 1: 2009 (CB Scheme Report/Certificate),
EN 50332-1: 2000, EN50332-2: 2003

Also Licensed for Standards:

UL 60950-1: 2007 R12.11, CAN/CSA-C22.2 No. 60950-1-07 + A1: 2011
Additional licenses issued for specific countries available on request.

EMC: EN 55022: 2010, EN 301 489-1 v1.9.2 (2011-09), EN 301 489-17 v2.1.1 (2009-05)
EN 61000-4-2: 2009, EN 61000-4-3: 2010, EN 61000-4-8: 2010

The products are licensed, as required, for additional country specific standards for the International Marketplace. Additional issued licenses available upon request.

Radio: EN 300 328 v.1.7.1 (2006-10) & EN 301 893 v.1.6.1 (2011-11)

Electromagnetic compatibility and Radio spectrum Matters (ERM); Wideband transmission systems; Data transmission equipment operating in the 2,4 GHz ISM band and using wide band modulation techniques and Broadband Radio Access Networks (BRAN); 5 GHz high performance RLAN. Certifications are harmonized to the EN standards covering essential requirements under article 3.2 of the R&TTE Directive. Compliance includes testing with antennas as specified in attached table.

SAR: EN 62311: 2008

Environmental: Low Voltage Directive 2006/95/EC, RoHS 2011/65/EU, WEEE 2012/19/EU EN 71-3: 2013
REACH 2006/1907/EC, Packaging 94/62/EC, Battery 2006/66/EC, Toys Safety Directive 2009/48/EC

Bulgaria: С това, Turtle Beach обявява, че този модел на радио на ELITE 800X RX & TX, е със съгласие с съществените изисквания и други важни условия на директива 1999/5 на европейски съюз

Czech Republic: Turtle Beach tímto prohlašuje, že tento ELITE 800X RX & TX, je ve shodě se základními požadavky a dalšími příslušnými ustanoveními směrnice 1999/5/ES.

Denmark: Undertegnede Turtle Beach erklærer herved, at følgende udstyr ELITE 800X RX & TX, overholder de væsentlige krav og øvrige relevante krav i direktiv 1999/5/EF.

English: Hereby, Turtle Beach declares that this ELITE 800X RX & TX, is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.

Estonia: Käesolevaga kinnitab Turtle Beach seadme ELITE 800X RX & TX, vastavust direktiivi 1999/5/EÜ põhinõuetele ja nimetatud direktiivist tulenevatele teistele asjakohastele sätetele.

Finland:

Turtle Beach vakuuttaa täten että ELITE 800X RX & TX, tyyppinen laite on direktiivin 1999/5/EY oleellisten vaatimusten ja sitä koskevien direktiivin muiden ehtojen mukainen.

France: Par la présente Turtle Beach déclare que l'appareil ELITE 800X RX & TX, est conforme aux exigences essentielles et aux autres dispositions pertinentes de la directive 1999/5/CE.

German: Hiermit erklärt Turtle Beach., dass sich das Gerät ELITE 800X RX & TX, in Übereinstimmung mit den grundlegenden Anforderungen und den übrigen einschlägigen Bestimmungen der Richtlinie 1999/5/EG befindet.

Greece:

ΜΕ ΤΗΝ ΠΑΡΟΥΣΑ Turtle Beach.ΗΛ.ΝΕΙ ΟΤΙ ELITE 800X RX & TX, ΣΥΜΜΟΡΦ.ΝΕΤΑΙ ΠΡΟΣ ΤΙΣ ΟΥΣΙ..ΕΙΣ ΑΠΑΙΤΗΣΕΙΣ ΚΑΙ ΤΙΣ ΛΟΙΠΕΣ ΣΧΕΤΙΚΕΣ .ΙΑΤΑΞΕΙΣ ΤΗΣ Ο.ΗΓΙΑΣ 1999/5/EK.

Hungary: Alulírott, Turtle Beach nyilatkozom, hogy a ELITE 800X RX & TX, megfelel a vonatkozó alapvető követelményeknek és az 1999/5/EC irányelv egyéb előírásainak.

Italy: Con la presente Turtle Beach dichiara che questo ELITE 800X RX & TX, è conforme ai requisiti essenziali ed alle altre disposizioni pertinenti stabilite dalla direttiva 1999/5/CE.

Latvia: Ar šo Turtle Beach deklarç, ka ELITE 800X RX & TX, atbilst Direktīvas 1999/5/EK būtiskajām prasībām un citiem ar to saistītajiem noteikumiem.

Lithuania: Šiuo Turtle Beach deklaruoja, kad šis ELITE 800X RX & TX, atitinka esminius reikalavimus ir kitas 1999/5/EB Direktyvos nuostatas.

Malta: Hawnhekk, Turtle Beach., jiddikjara li dan ELITE 800X RX & TX, jikkonforma mal-tiijiet essenzjali u ma provvedimenti orajn relevanti li hemm fid-Dirrettiva 1999/5/EC.

Netherlands: Hierbij verklaart Turtle Beach dat het toestel ELITE 800X RX & TX, in overeenstemming is met de essentiële eisen en de andere relevante bepalingen van richtlijn 1999/5/EG.

Poland: Niniejszym Turtle Beach oewiadacza, że ELITE 800X RX & TX, jest zgodny z zasadniczymi wymogami oraz pozosta³ymi stosownymi postanowieniami Dyrektywy 1999/5/EC.

Portugal:

Turtle Beach declara que este ELITE 800X RX & TX, está conforme com os requisitos essenciais e outras disposições da Directiva 1999/5/CE.

Romania: Astfel, Turtle Beach declară acel acest ELITE 800X RX & TX, este în conformitate cu cerințele necesare și proviziile alte semnificative de Directive 1999 5 EC.

Slovakia: Turtle Beach týmto vyhlasuje, že ELITE 800X RX & TX spĺna základné požiadavky a všetky príslušné ustanovenia Smernice 1999/5/ES.

Slovenia: Turtle Beach izjavlja, da je ta ELITE 800X RX & TX, v skladu z bistvenimi zahtevami in ostalimi relevantnimi določili directive 1999/5/ES.

Spain: Por medio de la presente Turtle Beach declara que el ELITE 800X RX & TX, cumple con los requisitos esenciales y cualesquiera otras disposiciones aplicables o exigibles de la Directiva 1999/5/CE.

Sweden: Härmed intygar Turtle Beach att denna ELITE 800X RX & TX, står i överensstämmelse med de väsentliga egenskapskrav och övriga relevanta bestämmelser som framgår av direktiv 1999/5/EG.

LIMITED ONE YEAR WARRANTY FOR TURTLE BEACH PRODUCTS:

Voyetra Turtle Beach, Inc. ("VTB") warrants to the original end-user purchaser ("Purchaser") that the retail Turtle Beach hardware product herein ("Product") will be free of defects in materials and workmanship for a period of one year from the date of purchase by the Purchaser ("Warranty Period"). Any Extended Warranty or Service Plans purchased through a Retail store are not honored by VTB. The Warranty refers to the repair/replace-ment of a defective product during this period and not a refund.

This limited warranty is extended only to the original Purchaser of a new product, which was not sold "AS IS". It is not transferable or assignable to any subsequent purchaser. This limited warranty is applicable only in the country or territory where the Product was purchased from an authorized VTB retailer and does not apply to a Product that has been purchased as used or refurbished or was included as part of a non-VTB product.

WARRANTY SERVICE:

In the USA and CANADA Warranty Service is provided by our Turtle Beach USA offices and in all other Countries it is provided by our local International Distributors when available. Refurbished/Recertified products are sold on an AS IS basis with a 90-day Warranty or less in accordance with each ven-dor's policy.

VTB does not warrant uninterrupted or error-free operation of the Product and is under no obligation to support the Product for all computer operating systems or future versions of such operating systems.

If a defect should occur during the Warranty Period, Purchaser must contact VTB to obtain a Return Merchandise Authorization ("RMA") number on the basis of the dated purchase receipt. Purchaser will be responsible for shipping costs incurred in returning the defective Product to an authorized VTB service center, or to the repair facility located at VTB's corporate headquarters. VTB will not be responsible for other products or accessories included with the defective Product sent to VTB. The RMA number must be clearly indicated on the outside of the package. Packages without an RMA number will be refused by VTB or its representatives and returned to sender at the sender's expense.

In the event of a defect, Purchaser's sole and exclusive remedy, and VTB's sole liability, is expressly limited to the correction of the defect by adjust-ment, repair, or replacement of the Product at VTB's sole option and expense. VTB owns all Products it has replaced and all parts removed from repaired Products. VTB uses new and reconditioned parts made by various manufacturers in performing warranty repairs and building replacement products. If VTB repairs or replaces a product, the original Warranty Period is not extended, however, VTB warrants that repaired or replacement parts will be free from defects in material and workmanship for a period of thirty (30) days from the date of repair or replacement, or for the remainder of the Warranty Period, whichever is greater.

This warranty does not apply to any Product that has had its serial number altered, removed or defaced, or any Product damage caused by shipping, improper storage, accident, problems with electrical power, abuse, misuse, neglect, ordinary wear, acts of God (e.g. flood), failure to follow directions, improper maintenance, use not in accordance with product instructions, unauthorized modification or service of the Product or damage resulting from the use of the Product with hardware, software or other products not provided by or specifically recommended by VTB.

NOTES:

- Replacement Parts and accessories that are subject to "wear and tear" such as earpads, mic foam covers, talkback cables, etc. have a three (3) month Warranty.
- Replacement Parts for Discontinued Products are sold on an AS IS basis, they are not supported and come with a 30 day Warranty.

THIS LIMITED WARRANTY IS PURCHASER'S SOLE AND EXCLUSIVE REMEDY AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED. TO THE EXTENT PERMITTED BY APPLICABLE LAW, VTB HEREBY DISCLAIMS THE APPLICABILITY OF ANY IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR USE FOR THE PRODUCT. IF SUCH A DISCLAIMER IS PROHIBITED BY APPLICABLE LAW, THE IMPLIED WARRANTY IS LIMITED TO THE DURATION OF THE FOREGOING LIMITED WRITTEN WARRANTY.

IN NO EVENT SHALL VTB BE LIABLE FOR ANY INDIRECT, INCIDENTAL, SPECIAL, PUNITIVE OR CONSEQUENTIAL DAMAGES, OR DAMAGES, INCLUDING BUT NOT LIMITED TO ANY LOST PROFITS, DATA, OR LOSS OF USE, ANY THIRD PARTY CLAIMS, AND ANY INJURY TO PROPERTY OR BODILY INJURY (INCLUD-ING DEATH) TO ANY PERSON, ARISING FROM OR RELATING TO THE USE OF THIS PRODUCT OR ARISING FROM BREACH OF THE WARRANTY, BREACH OF CONTRACT, NEGLIGENCE, TORT, OR STRICT LIABILITY, EVEN IF VTB HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

This warranty supersedes all prior agreements or understandings, oral or written, relating to the Product, and no representation, promise or condi-tion not contained herein will modify these terms. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above exclusion or limitation may not apply to you. This warranty gives you specific legal rights. You may also have other rights, which vary from state to state. Any action or lawsuit for breach of warranty must be commenced within eighteen (18) months following the purchase of the Product.

EXCLUSIONS FROM LIMITED WARRANTY:

This Limited Warranty shall not apply and VTB has no liability under this Limited Warranty if the Turtle Beach Product:

- is used for commercial purposes such as "LAN, Call Centers" (including rental or lease);
- is modified or tampered with;
- is damaged by Acts of God, power surge, misuse, abuse, negligence, accident, wear and tear, mishandling, misapplication, or other causes unrelated to defective materials or workmanship;
- serial number is defaced, altered or removed;
- is not used in accordance with the documentation and use instructions; or
- is repaired, modified or altered by other than authorized repair centers.
- is no longer available because it was discarded.



1 IN GAMING AUDIO

For: Xbox One | Mobile*



Watch Turtle Beach product training videos at:
[youtube.com/TurtleBeachVideos](https://www.youtube.com/TurtleBeachVideos)



Product support and warranty information:
[TurtleBeach.com/support](https://www.TurtleBeach.com/support)

© 2015 Voyetra Turtle Beach, Inc. (VTB, Inc.) All rights reserved. Turtle Beach, the palm tree logo, Voyetra, and Ear Force are either trademarks or registered trademarks of VTB, Inc. AUDIO ADVANTAGE is a trademark of Turtle Beach, Inc. Dolby and the double-D symbol are trademarks of Dolby Laboratories. Bluetooth is a trademark of Bluetooth SIG, Inc. Google Play is a trademark of Google Inc. Android is a trademark of Google Inc. For DTS patents, see <http://patents.dts.com>. Manufactured under license from DTS Licensing Limited. DTS, the Symbol, & DTS and the Symbol together are registered trademarks, and DTS Headphone:X is a trademark of DTS, Inc. © DTS, Inc. All Rights Reserved. All other trademarks are the property of their respective owners. Actual product appearance may differ from imagery.

This product is compliant with the Consumer Product Safety Improvement Act of 2008, Public Law 110-314 (CPSIA)