

Smart HD WiFi Camera




Downloading and Installing "Yoosee" App

1. IPhone: Please go to App store and search" Yoosee " to download
2. Andriod Phone: Please go to Play store and Search "Yoosee" to Download
3. Scan Code to download



Sound Add(configuration)
 Plug in power and initiate camera
 Press the Reset button to restore the factory settings before connecting the app.

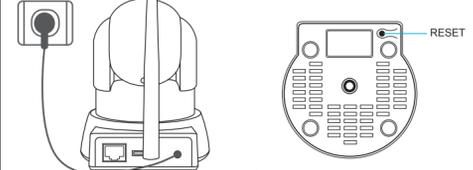


1

Setting up " Yoosee " App

- Before you begin...
1. Make sure the Yoosee app is installed to your device.
 2. Make sure that your device is connected to a 2.4GHz Wi-Fi network, NOT a 5GHz network.
 3. Make sure the camera have been powered

Add new device (Fast Networking)

1. Click "+" (Figure1) to "Add new device" (Figure2)

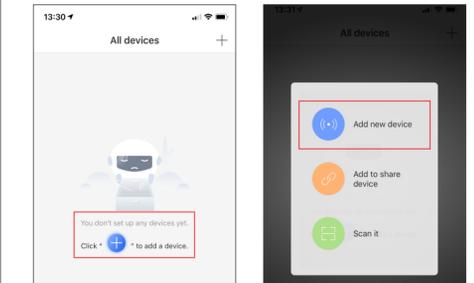


(Figure1)

2

(Figure2)

2. Select "Fast Networking" to connect camera (Figure3)
3. Input your wifi and password. Click "Next" (Figure4)

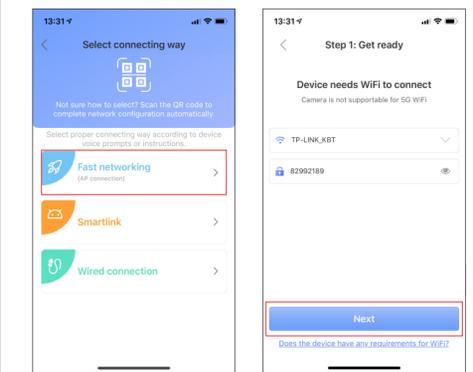


(Figure3)

(Figure4)

3

4. Click "Hearing the sound of Dudu" if you are hearing (Figure5)
5. Click "connect AP hot spot" to find "GW_AP_XXX" wifi if you couldn't find "CanNot find" "GW_AP_XXX" wifi.(Figure6)

1. Please Return back this step and check again
2. Please reset the camera

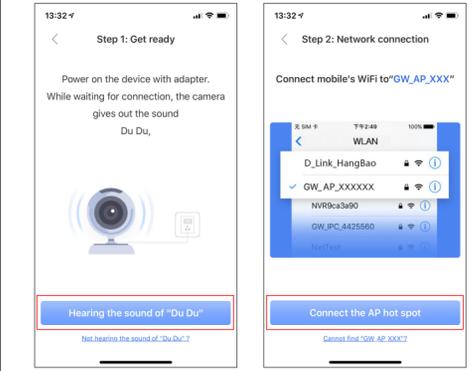


(Figure5)

4

(Figure6)

6. Turn up the phone Volume and make the phone closer to the camera and click "Send the Sound Wave".(Figure15)

Attention: If the connection failed
 1. Please follow the instruction to check, reset the camera and try again
 2. Please reset the camera and try with "fast networking connection" and follow the instruction of fast Networking connection Page on the manual

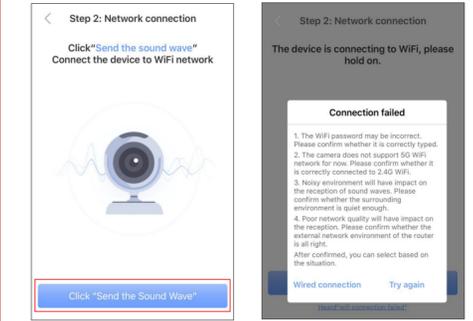


(Figure15)

10

(Figure16)

8. After connected successfully, please go with configure the device to set up the camera name Then click "Confirmed".
- Check my device" (Figure17)

9. Add successfully. Click "Check my device" to view it (Figure18)

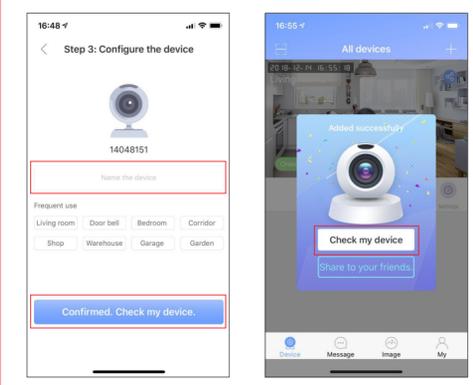


(Figure17)

11

(Figure18)

Apps instructions

- Share: Share the camera with your family or friend
- Disable Alerts: You could set the alert and alarm quickly here with click "On Guard"
- Playback: Video Playback (It have to be used after TF card inserted)
- Settings: Other function setup. Such as alarm settings, Time, picture and sound settings
- Message: For all alert message sent by motion detection
- Image: All of screenshot and recorded video here

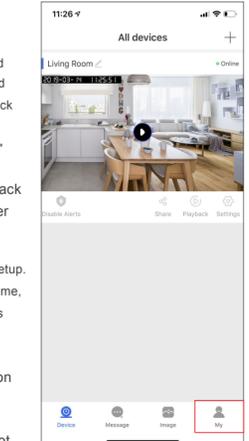


12

Turn off the alarm when Alert push

On the Iphones
 Please just mute your iphone to turn off the alarm
 (Note: After mute iphone to turn off the alarm, you have to close the app as well. If you are using the app, the alarm still be on with alert to remind you to watch it)

On the Andriod Phones
 Go to "All devices"->"General Settings"- Disable "Alarm ring" and "Vibrate when alarm activated"

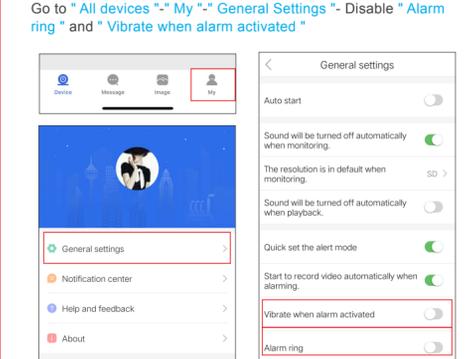


13

Using your finger on the video to Remote the movement of the camera


- Settings
- Enlarge image
- Talkback
- Record
- Capture
- Volume
- Bind the memory shot, like screenshot
- Video Resolution choice: HD, SD, LD

14

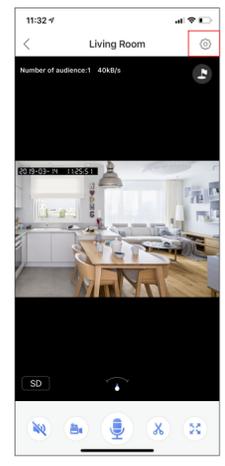

6. Find the "GW_AP_XXX" wifi and choose to connect it Then return back to the app (Figure7)

7. After return to the app, click " Heard device is online already " (Figure8)

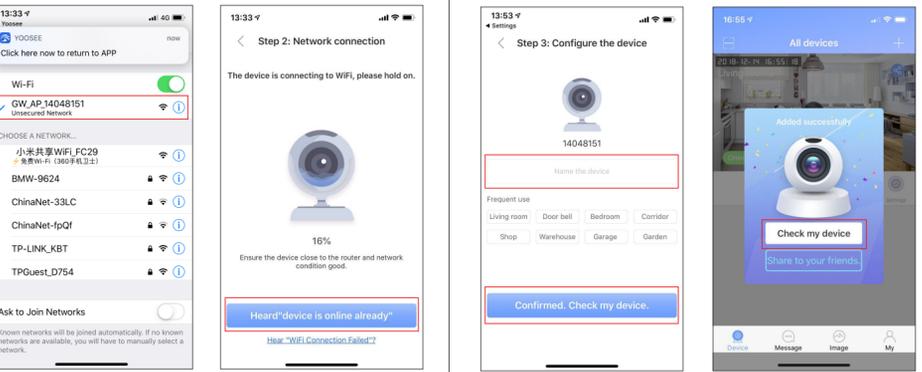

(Figure7)

(Figure8)


5

If "Fast Networking" conection is not work, please reset the camera Try with " Smart Link " connection
Before Smart Link Connection

1. Please make sure you already turn on the sound mode on your phone and make sure it is in biggest volume
2. If you already tried fast Networking connection, please make sure you already reset the camera


Add new device (Smart Link)

1. Click "+" to "Add new device"

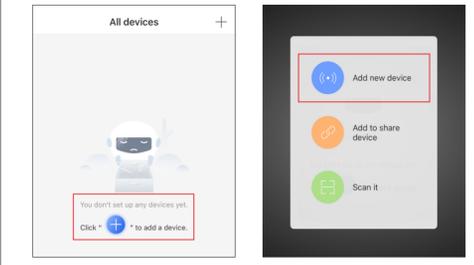

7

2. Choose: " Smart Link " to connect.(Figure11)
3. Setup your wifi and wifi password. After that, go with " Next " (Figure12)

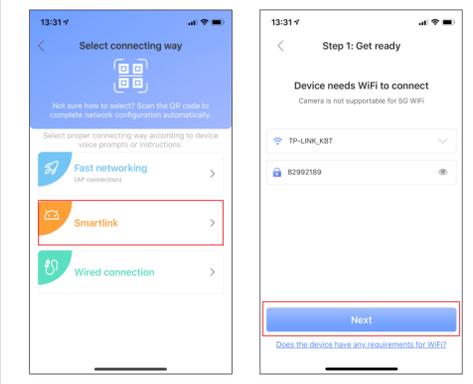


(Figure11)

(Figure12)

8

4. If you heard with " Du Du " from Camera, then clicked "Hearing the sound of DuDu" (Figure13)

Attention :If you not "Hearing the sound of Du Du "
 5. Click " Not hearing the sound of DuDu " Follow the instruction to reset (Figure14)

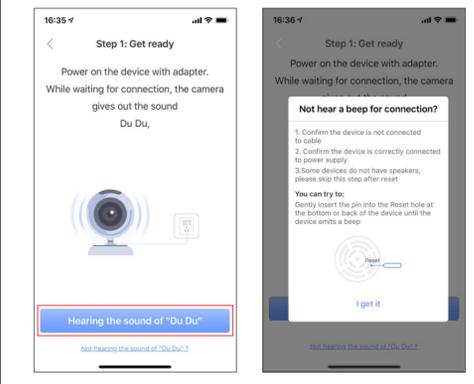

(Figure13)


9

(Figure14)

Basic Setting

- Time Settings:** Set up date and time zone
- Picture and Sound:** Set up the video format, Sound Volume, Video Quality and Reverse Image here
- Record Settings:** (Only Available after your insert the Micro SD card into the Camera)
 Setup Record mode, check SD card capacity and format SD card here
 Record Manually: Only Record the video by manually. Will not record automatically.
 Record Alarm: Each alarm after any motion detection will be recorded Automatically
 Record Timer: You could schedule any time you want to record. Like from 1:00 to 15:00 each day for recording

15

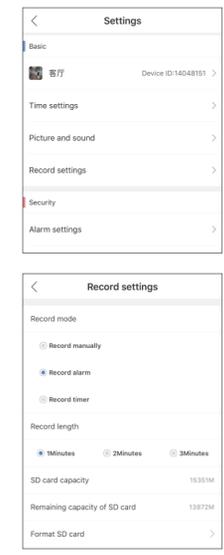


Security Setting

- Alarm Settings**
 Receive Alarm Prompt: Enable it to get the Alarm Alert
 Alarm Email: Add your email to get the Alarm Buzzer: Get the buzzer go with Alarm Alert or Not And setup the Buzzer time
- Motion Detection:** Enable it to get movement detection
- Object Tracking:** Not workable on this camera
- Add Sensor:** Not workable on this camera

Note: Even you enable " receive Alarm Prompt " and " Motion Detection " And you also have to enable " On Guard " on " All Device " to make alert push up working

- RTSP Settings:** You could operate the camera on the PC after you enable it
- Network settings**
 Firmware update: Any update for the firmware on camera could be checked here
 Network settings: Checking if it is wired or wifi connection

16

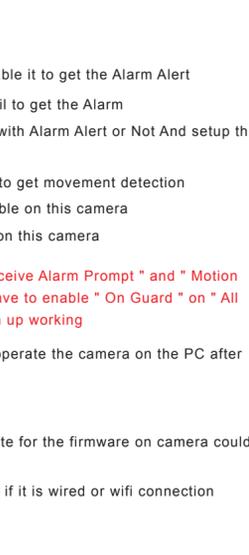


Tips:
 Camera device will only recongized one Administrator (First user pairing camera) thus if camera device is paired, other users can only add camera device via sharing. To conduct re-pairing to camera device, administrator must unbind camera via APP or reset camera to factory settings.

Quick Guide for PC Client Installation
 1. CMS Client Downloads:
 Visit " www.yoosee.co " on computer browser, click " CMS " to download the software to computer or laptop.



2. CMS Client account and login:
 Open CMS software (Default user name: " admin ", no password required), click OK to login.

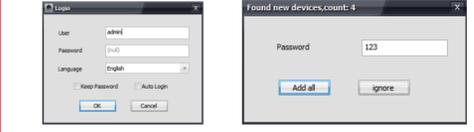

17

3. Add Device:
 After successful login, the software will automatically search devices in LAN. A dialog box will pop-up if any device is found, click "Add all", devices will be added into the list. Manually adding: Click the "+" on the left interface, select the "Manual add device", input device name, ID and password and click OK to complete adding.



4. Monitoring:
 Open CMS software, right-click on Device List and select "all connect" option in the menu; or select an added device in Device List and right-click and select "Start monitoring" in pop-up menu.



18

Video Instruction

1. Scan Below OR code to watch it
2. Search " Zhiliao Dog camera fast networking " or " Zhiliao Dog camera smart link " to watch it



Fast Networking Connection Smart Link Connection

Zhiliao After-Sales Support
 Contact Us
 Email: info@zhiliaocam.com
 www.zhiliaoacm.com

Follow Us
 Youtube: Zhiliao Support
 Instagram: Zhiliaoofficial

19