


Instructions



CH2370 Camera



CH2510 Camera



Dear Customer,


Thanks you for purchased podofu wireless backup camera. Install the items is a very interesting thing, please follow the diagram and instructions.

1. Please check the parts in the package:

- 1 x 7-inch Car Monitor
- 2 x Car back up Camera
- 3 x Antennas
- 2 x Power Cable
- 1 x Remote Controller
- 1 x Mount Bracket
- 1 x User Manual

2. Install the antenna onto the monitor and cameras by twisting it on.

3. Connect the monitor with the extensional cable tightly. Monitor connector has 8 small pins, please alignment interface to install it.

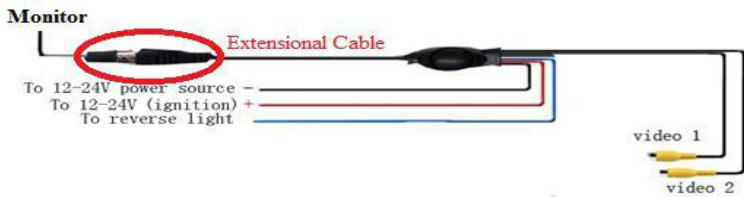

4. Connect the wires of the extensional cable to the 12V-24V power source of the vehicle (**Power source can be found in the fuse box**). Connect the Red wire to the positive + and the black wire to Ground. Leave the green/blue cable alone, don't connect anything while wireless connection. (Connect the green/blue wire to the positive power reverse light or switched power source while wired connection).

5. Mount the camera to the license plate with two screws

6. Connect the cameras (Red port) to the power cable. Wiring the red wire to the positive power of reverse light and the black wire to the ground.



Troubleshooting Guide:

1. Please press the 1st button on monitor or press Video Select on Remote to AV2 which works for wireless camera. AV1 for a wired camera.
2. There are 2 channels for the cameras: 2370 and 2510. Please switch each by pressing the 2nd button on Monitor or pressing Model Select on Remote.
3. For maximum signal point the antennas towards each other.
4. Keep monitor and camera at least the distance of 2 meters (about 78.7"), or camera and monitor will interfere with each other.
5. The blue wire is a trigger wire, used to be automatically switched the screen into reverse mode when pull reverse, IR Camera will turn red when light is low.

Any question, please email us to Podofu@126.com.

Thanks
podofu