

ViewSonic® PROJECTOR PA503S

Key Features

Extended Lifespan | Automatic Sleep
Timer | Auto Power Off | Bright Images
in Any Environment | Amazing Colour
Accuracy




Product Description

The ViewSonic PA503S offers impressive visual performance in small business meeting rooms and classrooms. With higher brightness and longer lamp life, PA503S projector is guaranteed to reproduce the finest of details in any environment for much longer. ViewSonic exclusive SuperColour™ technology offers a wider range of displayable colour ensuring true-to-life colour accuracy in both bright and dark environments without sacrificing image quality.



1. Keypad
2. LED indicator
3. Lamp cover
4. Security lock
5. Zoom/Focus
6. Front IR

7. Projection Lens
8. Audio in/out
9. HDMI
10. Dual VGA
11. VGA out
12. Mini USB

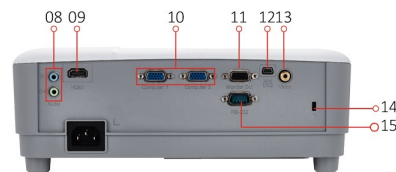

13. Video
14. Kensington® Lock Slot
15. RS232

Visit Us  www.viewsonic.com

SPECIFICATION

| | |
|------------------------------------|--|
| Projection system: | 0.55" SVGA |
| Native Resolution: | 800x600 |
| DC type: | DC3 |
| Brightness: | 3600 ANSI Lumens |
| Contrast Ratio with SuperEco mode: | 22000:1 |
| Display Colour: | 1.07 Billion Colours |
| Light Source: | Lamp |
| Light source life (Nor/SuperEco): | 5000/15000 |
| Lamp Watt: | 190W |
| Lens: | F=2.56-2.68, f=22-24.1 mm |
| Projection Offset: | 120%+/-5% |
| Throw Ratio: | 1.96~2.15 |
| Image size: | 30" - 300" |
| Throw Distance: | 1.19m-13.11m(100" @3.98m) |
| Keystone: | ±40° (Vertical) |
| Optical Zoom: | 1.1x |
| Audible Noise (Eco): | 27dB |
| Resolution Support: | VGA(640 x 480) to FullHD(1920 x 1080) |
| HDTV Compatibility: | 480i, 480p, 576i, 576p, 720p, 1080i, 1080p |
| Video Compatibility: | NTSC, PAL, SECAM |
| Horizontal Frequency: | 15K~102KHz |
| Vertical Scan Rate: | 23~120Hz |

INPUT

| | |
|-------------------------------------|----------|
| Computer in (share with component): | 2 |
| Composite: | 1 |
| Audio-in (3.5mm): | 1 |
| HDMI: | 1 (Back) |

OUTPUT

| | |
|--------------------|----|
| Monitor out: | 1 |
| Audio out (3.5mm): | 1 |
| Speaker: | 2W |

CONTROL

| | |
|-----------------------------|---|
| RS232: | 1 |
| USB type mini B (Services): | 1 |

OTHERS

| | |
|---------------------------------------|--|
| Power Supply Voltage: | 100-240V+/- 10%, 50/60Hz AC |
| Power Consumption: | Normal: 260W Standby: <0.5W |
| Operating Temperature: | 0~40°C |
| Carton: | Brown |
| Net Weight: | 2.2kg |
| Dimensions (WxDxH) w/adjustment foot: | 294x218x110mm |
| Language: | English, French, Spanish, Thai, Korean, German, Italian, Russian, Swedish, Dutch, Polish, Czech, T-Chinese, S-Chinese, Japanese, Turkish, Portuguese, Finnish, Indonesian, India, Arabic, Vietnamese |

STANDARD ACCESSORY

| | |
|-----------------|-----------------|
| Power Cord: | 1 |
| VGA cable: | 1 |
| Remote Control: | 1 |
| QSG & CD: | QSG: 1 / CD: NA |
| Air Filter: | RSPL |