



Installation Instructions
Mounting Bracket
07-17 Jeep Wrangler JK
PART# 51-0451

Please read and understand all instructions before starting this installation. The manufacturer holds no responsibility for any personal injury or damage sustained to vehicle during installation or use of this product.


CAUTION: This product is designed primarily to enhance the appearance of this vehicle and in no way will prevent damage to vehicle, personal injury or death in the event of an accident.

TOOLS REQUIRED:

- Ratchet
- Extension
- Torx Bit T40

HARDWARE INCLUDED:

- A. (2) $\Phi 6$ Flat Washers
- B. (2) $\Phi 6$ Spring Washers
- C. (2) Lock Washers

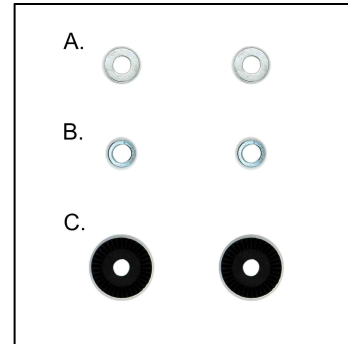

COMPONENTS INCLUDED:

- A. Mounting Brackets




NOTES ON INSTALLATION

- 1) Pre-fit all panels as you proceed with the installation before attempting to bolt into position. This will enable you to understand exactly how the part is intended to fit onto vehicle.
- 2) **DO NOT** over-tighten screw.
- 3) If the instructions call for you to save and re-install parts set them aside in a protected area so as not to damage them.

STEP 1: REMOVING FACTORY BOLTS FROM A PILLAR

Using a T40 torx bit locate and remove 5 factory Torx bolts holding A pillar bracket to vehicle. Save hardware for re-installation. (Fig 1)

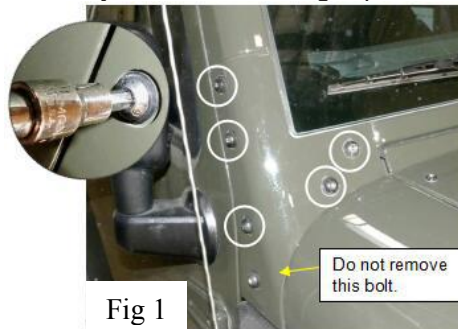

STEP 2: INSTALLING LIGHT BAR MOUNTS

- 1) Locate supplied light bar mount (A) and place onto vehicle as shown above. (Fig 2)
- 2) Install all factory bolts through light bar mount (A) onto vehicle. Tighten down factory bolts using torx bit T40. Repeat steps 1-3 for other side light mount. (Fig 3)

NOTE: You will need to purchase a light bar that will install to these brackets. Carefully measure the distance between the brackets and purchase the correct light bar. Follow all supplied instructions for correctly mounting and wiring your new light bar.



Fig 2



Fig 3

