

APPLICATION FOR IEC REPORT
On Behalf of
HENAN ESHOW ELECTRONIC COMMERCE CO., LTD
Li-ion Battery
Model: RT82

Prepared For : **HENAN ESHOW ELECTRONIC COMMERCE CO., LTD**
Room 722, Sanjiang Building, No.170 Nanyang Road, Huiji
District, Zhengzhou, Henan, China

Prepared By : **Shenzhen Anbotek Compliance Laboratory Limited**
East of 4/F., Building A, Hourui No.3 Industrial Zone,
Xixiang Street, Bao'an District, Shenzhen, Guangdong,
China
Tel: (86)755-26066061
Fax: (86)755-26066021

Date of Test: May. 18, 2017 to Jun. 07, 2017
Date of Report: Jun. 30, 2017
Report Number: R0617060399B

TEST REPORT

IEC 62133: 2012

**Secondary cells and batteries containing alkaline or other non-acid electrolytes —
Safety requirements for portable sealed secondary cells, and for batteries made from them, for
use in portable applications**

Report

Reference No.....: R0617060399B

Compiled by (+ signature).....: Fannie Zhu / Project Engineer



Approved by (+ signature).....: Mark Zhu / Project Manager



Date of issue.....: Jun. 30, 2017

Contents.....: 25 pages(including 3 pages of photos)

Testing laboratory

Name.....: Shenzhen Anbotek Compliance Laboratory Limited

Address.....: East of 4/F., Building A, Hourui No.3 Industrial Zone, Xixiang
Street, Bao'an District, Shenzhen, Guangdong, China

Testing location.....: Shenzhen Anbotek Compliance Laboratory Limited

Client

Name.....: HENAN ESHOW ELECTRONIC COMMERCE CO., LTD

Address.....: Room 722, Sanjiang Building, No.170 Nanyang Road, Huiji
District, Zhengzhou, Henan, China**Test specification**

Standard.....: IEC 62133: 2012

Test procedure: Compliance with IEC 62133: 2012

Procedure deviation.....: N.A.

Non-standard test method.....: N.A.

Test item

Description.....: Li-ion Battery

Trademark.....: RETEVIS

Model and/or type reference.....: RT82


Serial number.....: N.A.

Manufacturer.....: TYT Electronics Co., Ltd.

Address.....: Block 39-1, Optoelectronics-information industry base, Nan'an,
Quanzhou, Fujian

Rating(s).....: Battery: DC 7.4V, 2200mAh

Cell: 3.7V, 2200mAh

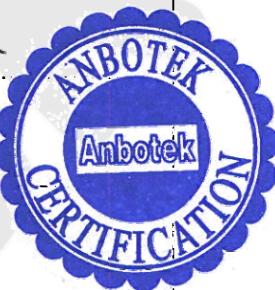

Particulars: test item vs. test requirements

Ambient temperature.....: 20 °C ± 5 °C.

Test case verdicts

Test case does not apply to the test object.....: N(A.)

Test item does meet the requirement.....: P(ass)

Test item does not meet the requirement.....: F(ail)

Testing

Date of receipt of test item: May. 18, 2017

Date(s) of performance of test.....: May. 18, 2017 to Jun. 07, 2017

General remarks

This test report shall not be reproduced except in full without the written approval of the testing laboratory.

The test results presented in this report relate only to the item tested.

"(see remark #)" refers to a remark appended to the report.

"(see appended table)" refers to a table appended to the report.

Throughout this report a dot is used as the decimal separator.

Comments:

1. If no otherwise specified, all tests performed at the model: RT82
2. Details information for the battery of model RT82 , as following:



length:120.0±0.2mm

Width:53.0±0.1mm

Thickness:18±0.1mm

General product information with two lithium-ion cells(2S1P),and has overcharge,over discharge, over current and short-circuits proof circuit.

The main features of the battery are show as below(clause 8.1.1)

Model	Nominal Capacity	Nominal Voltage	Nominal Charge Current	Nominal Discharge Current	Max. Charge Current	Max. Discharge Current	Max. Charge Voltage	Cut-off Voltage
RT82	2200mAh	7.4V	400mA	400mA	1000mA	2000mA	8.5V	5.5V

The main features of the battery are show as below(clause 8.1.2)

Model	Upper limit Charge Voltage	Taper-off Current	Lower Charge temperature	Upper Charge temperature
RT82	8.5V	110mA	10°C	45°C

The main features of the cell in the battery are show as below(clause 8.1.1)

Model	Nominal Capacity	Nominal Voltage	Nominal Charge Current	Nominal Discharge Current	Max. Charge Current	Max. Discharge Current	Max. Charge Voltage	Cut-off Voltage
553580	2200mAh	3.7V	400mA	400mA	1000mA	2000mA	4.2V	2.75V

The main features of the cell in the battery are show as below(clause 8.1.2)

Model	Upper limit Charge Voltage	Taper-off Current	Lower Charge temperature	Upper Charge temperature
553580	4.25V	110mA	10°C	45°C

Copy of marking:

Li-ion Battery

Model number: RT82
2ICP6/35/80
7.4Vdc, 2200mAh, 16.28Wh
(+), (-),

TYT Electronics Co., Ltd.
2017.05.10

CAUTION

- Do not disassemble or modify
- Do not short-circuit
- Do not dispose in fire
- Do not expose to high temperature

History of amendments and modifications:

Ref. No. R0617050256B, dated 2017-June-07 (original test report)

Ref. No. R0617060399B, dated 2017-June-30 (1st modification, modified client and model.)

IEC 62133: 2012			
Clause	Requirement – Test	Result - Remark	Verdict
4	Parameter measurement tolerances		P
	Parameter measurement tolerances		P
5	General safety considerations		P
5.1	General		P
5.2	Insulation and wiring		P
	The insulation resistance between the positive terminal and externally exposed metal surfaces of the battery (excluding electrical contact surfaces) is not less than 5 MΩ	No metal case exists.	N
	Insulation resistance (MΩ)..... :		—
	Internal wiring and insulation are sufficient to withstand maximum anticipated current, voltage and temperature requirements		P
	Orientation of wiring maintains adequate creepage and clearance distances between conductors		P
	Mechanical integrity of internal connections accommodates reasonably foreseeable misuse		P
5.3	Venting		P
	Battery cases and cells incorporate a pressure relief mechanism or are constructed so that they relieve excessive internal pressure at a value and rate that will preclude rupture, explosion and self-ignition	Venting mechanism incorporate on the cell.	P
	Encapsulation used to support cells within an outer casing does not cause the battery to overheat during normal operation nor inhibit pressure relief		N
5.4	Temperature/voltage/current management		P
	Batteries are designed such that abnormal temperature rise conditions are prevented	Overcharge, over discharge, over current and short-circuit proof circuit used in this battery. See tests of clause 8.	P
	Batteries are designed to be within temperature, voltage and current limits specified by the cell manufacturer	See above.	P
	Batteries are provided with specifications and charging instructions for equipment manufacturers so that associated chargers are designed to maintain charging within the temperature, voltage and current limits specified	The charging limits specified in the user manual.	P
5.5	Terminal contacts		P

IEC 62133: 2012			
Clause	Requirement – Test	Result - Remark	Verdict
	Terminals have a clear polarity marking on the external surface of the battery		P
	The size and shape of the terminal contacts ensure that they can carry the maximum anticipated current	DC connector complied with the requirements.	P
	External terminal contact surfaces are formed from conductive materials with good mechanical strength and corrosion resistance		P
	Terminal contacts are arranged to minimize the risk of short circuits		P
5.6	Assembly of cells into batteries		P
5.6.1	If there is more than one battery housed in a single battery case, cells used in the assembly of each battery have closely matched capacities, be of the same design, be of the same chemistry and be from the same manufacturer	2S1P	P
	Each battery has an independent control and protection		N
	Manufacturers of cells make recommendations about current, voltage and temperature limits so that the battery manufacturer/designer may ensure proper design and assembly		P
	Batteries that are designed for the selective discharge of a portion of their series connected cells incorporate separate circuitry to prevent the cell reversal caused by uneven discharges		N
	Protective circuit components are added as appropriate and consideration given to the end-device application		P
	When testing a battery, the manufacturer of the battery provides a test report confirming the compliance according to this standard		N
5.6.2	Design recommendation for lithium systems only		P
	For the battery consisting of a single cell or a single cellblock: - Charging voltage of the cell does not exceed the upper limit of the charging voltage specified in Clause 8.1.2, Table 4; or		N
	- Charging voltage of the cell does not exceed the different upper limit of the charging voltage determined through Clause 8.1.2, NOTE 1.	Charging voltage: 4.2V, not exceed 4.25V specified in Clause 8.1.2, NOTE 1.	P

IEC 62133: 2012			
Clause	Requirement – Test	Result - Remark	Verdict

	For the battery consisting of series-connected plural single cells or series-connected plural cellblocks: - The voltages of any one of the single cells or single cellblocks does not exceed the upper limit of the charging voltage, specified in Clause 8.1.2, Table 4, by monitoring the voltage of every single cell or the single cellblocks; or		N
	- The voltages of any one of the single cells or single cellblocks does not exceed the different upper limit of the charging voltage, determined through Clause 8.1.2, NOTE 1, by monitoring the voltage of every single cell or the single cellblocks		N
	For the battery consisting of series-connected plural single cells or series-connected plural cellblocks: - Charging is stopped when the upper limit of the charging voltage, specified in Clause 8.1.2, Table 4, is exceeded for any one of the single cells or single cellblocks by measuring the voltage of every single cell or the single cellblocks; or		N
	- Charging is stopped when the upper limit of the different charging voltage, determined through Clause 8.1.2, NOTE 1, is exceeded for any one of the single cells or single cellblocks by measuring the voltage of every single cell or the single cellblocks		N
5.7	Quality plan		P
	The manufacturer prepares and implements a quality plan that defines procedures for the inspection of materials, components, cells and batteries and which covers the whole process of producing each type of cell or battery		P

6	Type test conditions	P
	Tests were made with the number of cells or batteries specified in Table 1 for nickel-cadmium and nickel-metal hydride systems and Table 2 for lithium systems, using cells or batteries that are not more than six months old	Complied. Table 2 for Lithium system.
	Unless noted otherwise in the test methods, testing was conducted in an ambient of $20^{\circ}\text{C} \pm 5^{\circ}\text{C}$.	Tests are carried out at $20^{\circ}\text{C} \pm 5^{\circ}\text{C}$.

7	Specific requirements and tests (nickel systems)	N
7.1	Charging procedure for test purposes	Lithium system.
7.2	Intended use	
7.2.1	Continuous low-rate charging (cells)	N

IEC 62133: 2012			
Clause	Requirement – Test	Result - Remark	Verdict
	Results: No fire. No explosion		N
7.2.2	Vibration		N
	Results: No fire. No explosion. No leakage	(See Table 7.2.2)	N
7.2.3	Moulded case stress at high ambient temperature		N
	Oven temperature (°C).....:		—
	Results: No physical distortion of the battery casing resulting in exposure if internal components		N
7.2.4	Temperature cycling		N
	Results: No fire. No explosion. No leakage.		N
7.3	Reasonably foreseeable misuse		N
7.3.1	Incorrect installation cell		N
	The test was carried out using: - Four fully charged cells of the same brand, type, size and age connected in series, with one of them reversed; or		N
	- A stabilized dc power supply.		N
	Results: No fire. No explosion.....:	(See Table 7.3.1)	N
7.3.2	External short circuit		N
	The cells or batteries were tested until one of the following occurred: - 24 hours elapsed; or		N
	- The case temperature declined by 20% of the maximum temperature rise		N
	Results: No fire. No explosion.....:	(See Table 7.3.2)	N
7.3.3	Free fall		N
	Results: No fire. No explosion.		N
7.3.4	Mechanical shock (crash hazard)		N
	Results: No fire. No explosion. No leakage.		N
7.3.5	Thermal abuse		N
	Oven temperature (°C).....:		—
	Results: No fire. No explosion.		N
7.3.6	Crushing of cells		N
	The crushing force was released upon: - The maximum force of $13 \text{ kN} \pm 1 \text{ kN}$ has been applied; or		N

IEC 62133: 2012			
Clause	Requirement – Test	Result - Remark	Verdict
	- An abrupt voltage drop of one-third of the original voltage has been obtained		N
	The cell is prismatic type and a second set of samples was tested, rotated 90° around longitudinal axis compared to the first set		N
	Results: No fire. No explosion..... : (See Table 7.3.6)		N
7.3.7	Low pressure		N
	Chamber pressure (kPa)..... :		—
	Results: No fire. No explosion. No leakage.		N
7.3.8	Overcharge		N
	Results: No fire. No explosion..... : (See Table 7.3.8)		N
7.3.9	Forced discharge		N
	Results: No fire. No explosion..... : (See Table 7.3.9)		N
8	Specific requirements and tests (lithium systems)		P
8.1	Charging procedures for test purposes		P
8.1.1	First procedure: This charging procedure applied to tests other than those specified in 8.1.2		P
8.1.2	Second procedure: This charging procedure applied to the tests of 8.3.1, 8.3.2, 8.3.4, 8.3.5, and 8.3.9		P
	If a cell's specified upper and/or lower charging temperature exceeds values for the upper and/or lower limit test temperatures of Table 4, the cells were charged at the specified values plus 5 °C for the upper limit and minus 5 °C for the lower limit	Charge temperature 10-45°C declared.	N
	A valid rationale was provided to ensure the safety of the cell (see Figure A.1)..... :		N
	For a different upper limit charging voltage (i.e. other than for lithium cobalt oxide systems at 4,25 V), the applied upper limit charging voltage and upper limit charging temperatures were adjusted accordingly	Lithium cobalt oxide system only.	N
	A valid rationale was provided to ensure the safety of the cell (see Figure A.1)..... :		N
8.2	Intended use		P
8.2.1	Continuous charging at constant voltage (cells)	Test complied.	P
	Results: No fire. No explosion..... : (See Table 8.2.1)		P

IEC 62133: 2012			
Clause	Requirement – Test	Result - Remark	Verdict
8.2.2	Moulded case stress at high ambient temperature (battery)		P
	Oven temperature (°C).....:.....		—
	Results: No physical distortion of the battery casing resulting in exposure of internal components		P
8.3	Reasonably foreseeable misuse		P
8.3.1	External short circuit (cell)		P
	The cells were tested until one of the following occurred: - 24 hours elapsed; or		N
	- The case temperature declined by 20% of the maximum temperature rise		P
	Results: No fire. No explosion.....:.....	(See Table 8.3.1)	P
8.3.2	External short circuit (battery)		P
	The batteries were tested until one of the following occurred: - 24 hours elapsed; or		P
	- The case temperature declined by 20% of the maximum temperature rise		N
	In case of rapid decline in short circuit current, the battery pack remained on test for an additional one hour after the current reached a low end steady state condition		N
	Results: No fire. No explosion.....:.....	(See Table 8.3.2)	P
8.3.3	Free fall		P
	Results: No fire. No explosion.	No fire. No explosion.	P
8.3.4	Thermal abuse (cells)		P
	The cells were held at $130^{\circ}\text{C} \pm 2^{\circ}\text{C}$ for: - 10 minutes; or	Test complied.	P
	- 30 minutes for large cells (gross mass of more than 500 g as defined in IEC 62281)		N
	Oven temperature (°C).....:.....	130°C	—
	Gross mass of cell (g).....:.....	<500g, small cell.	—
	Results: No fire. No explosion.	No fire. No explosion.	P
8.3.5	Crush (cells)		P
	The crushing force was released upon: - The maximum force of $13 \text{ kN} \pm 1 \text{ kN}$ has been applied; or	Test complied..	P

IEC 62133: 2012			
Clause	Requirement – Test	Result - Remark	Verdict
	- An abrupt voltage drop of one-third of the original voltage has been obtained; or		N
	- 10% of deformation has occurred compared to the initial dimension		N
	Results: No fire. No explosion..... : (See Table 8.3.5)		P
8.3.6	Over-charging of battery		P
	Test was continued until the temperature of the outer casing: - Reached steady state conditions (less than 10°C change in 30-minute period); or		N
	- Returned to ambient		P
	Results: No fire. No explosion..... : (See Table 8.3.6)		P
8.3.7	Forced discharge (cells)	Test complied.	P
	Results: No fire. No explosion..... : (See Table 8.3.7)		P
8.3.8	Transport tests		P
	Manufacturer's documentation provided to show compliance with UN Recommendations on Transport of Dangerous Goods	(See Table 8.3.8)	P
8.3.9	Design evaluation – Forced internal short circuit (cells)		N
	The cells complied with national requirement for.....: France, Japan, Korea and Switzerland.		—
	The pressing was stopped upon: - A voltage drop of 50 mV has been detected; or		N
	- The pressing force of 800 N (cylindrical cells) or 400 N (prismatic cells) has been reached	400N	N
	Results: No fire..... :		N

9	Information for safety		P
	The manufacturer of secondary cells ensures that information is provided about current, voltage and temperature limits of their products.	Cell specifications provided.	P
	The manufacturer of batteries ensures that equipment manufacturers and, in the case of direct sales, end-users are provided with information to minimize and mitigate hazards.	Battery pack specifications provided.	P
	Systems analyses performed by device manufacturers to ensure that a particular battery design prevents hazards from occurring during use of a product		N

IEC 62133: 2012			
Clause	Requirement – Test	Result - Remark	Verdict

	As appropriate, information relating to hazard avoidance resulting from a system analysis is provided to the end user.....:		N
--	---	--	---

10	Marking		P
10.1	Cell marking		N
	Cells marked as specified in the applicable cell standards: IEC 61951-1, IEC 61951-2 or IEC 61960.	The final product is battery.	N
10.2	Battery marking		P
	Batteries marked in accordance with the requirements for the cells from which they are assembled.	See marking plate on page 5.	P
	Batteries marked with an appropriate caution statement.		P
10.3	Other information		P
	Storage and disposal instructions marked on or supplied with the battery.		P
	Recommended charging instructions marked on or supplied with the battery.	Information for recommended charging instructions mentioned in manufacturer's specifications.	P

11	Packaging		P
	The materials and packaging design are chosen so as to prevent the development of unintentional electrical conduction, corrosion of the terminals and ingress of environmental contaminants.		P

Annex A	Charging range of secondary lithium ion cells for safe use		P
A.1	General		P
A.2	Safety of lithium-ion secondary battery	Complied.	P
A.3	Consideration on charging voltage	Complied.	P
A.3.1	General	Charging voltage is 4.2V	P
A.3.2	Upper limit charging voltage	4.25V	P
A.3.2.1	General		P
A.3.2.2	Explanation of safety viewpoint		N
A.3.2.3	Safety requirements, when different upper limit charging voltage is applied	4.25V applied.	N
A.4	Consideration of temperature and charging current		P

IEC 62133: 2012			
Clause	Requirement – Test	Result - Remark	Verdict
A.4.1	General		P
A.4.2	Recommended temperature range	See A.4.2.2.	P
A.4.2.1	General		P
A.4.2.2	Safety consideration when a different recommended temperature range is applied	Charging temperature declared by client is: 10-45°C	N
A.4.3	High temperature range	Not higher than the temperature range specific in this standard.	N
A.4.3.1	General		N
A.4.3.2	Explanation of safety viewpoint		N
A.4.3.3	Safety considerations when specifying charging conditions in high temperature range		N
A.4.3.4	Safety consideration when specifying new upper limit in high temperature range		N
A.4.4	Low temperature range	Not lower than the temperature range specific in this standard.	N
A.4.4.1	General		N
A.4.4.2	Explanation of safety viewpoint		N
A.4.4.3	Safety considerations, when specifying charging conditions in low temperature range		N
A.4.4.4	Safety considerations when specifying a new lower limit in the low temperature range		N
A.4.5	Scope of the application of charging current		N
A.5	Sample preparation		N
A.5.1	General		N
A.5.2	Insertion procedure for nickel particle to generate internal short		N
	The insertion procedure carried out at $20^{\circ}\text{C} \pm 5^{\circ}\text{C}$ and under -25°C of dew point		N
A.5.3	Disassembly of charged cell		N
A.5.4	Shape of nickel particle		N
A.5.5	Insertion of nickel particle to cylindrical cell		N
A.5.5.1	Insertion of nickel particle to winding core		N
A.5.5.2	Mark the position of nickel particle on the both end of winding core of the separator		N
A.5.6	Insertion of nickel particle to prismatic cell		N

	TABLE: List of critical components					P
Object/part No.	Manufacturer/ trademark	Type/model	Technical data	Standard (Edition / year)	Mark(s) of conformity ¹)	
Cell	TYT Electronics Co., Ltd.	553580	3.7V, 2200mAh	IEC 62133: 2012	Test with appliance	
1) An asterisk indicates a mark which assures the agreed level of surveillance.						

8.2.1	TABLE: Continuous charging at constant voltage (cells)				P
Sample No.	Recommended charging voltage V _c , (Vdc)	Recommended charging current I _{rec} , (mA)	OCV at start of test, (Vdc)	Results	
Cell- 01	4.200	400	4.194	No fire or explosion, No leakage	
Cell- 02	4.200	400	4.191		
Cell- 03	4.200	400	4.198		
Cell- 04	4.200	400	4.195		
Cell- 05	4.200	400	4.194		

Supplementary information:

- No fire or explosion
- No leakage
- Leakage
- Fire
- Explosion
- Bulge
- Others (please explain)

8.2.2	TABLE: Moulded case stress at high ambient temperature (battery)			P
Sample No.	Ambient, (°C)	OCV at start of test, (Vdc)	Results	
Battery- 19	70±2	8.334	No fire or explosion No leakage	
Battery- 20	70±2	8.326		
Battery- 21	70±2	8.341		

Supplementary information:

- No fire or explosion
- No leakage
- Leakage
- Fire
- Explosion
- Bulge
- Others (please explain)

8.3.1	TABLE: External short circuit (cell)					P	
Sample No.	Ambient, (°C)	OCV at start of test, (Vdc)	Resistance of circuit, (mΩ)	Maximum case temperature (°C)	Results		
Charging temperature: 10°C							
Cell- 06	24.17	4.105	79.3	102.56	No fire or explosion		
Cell- 07	24.17	4.118	67.2	108.45			
Cell- 08	24.17	4.123	88.1	107.62			
Cell- 09	24.17	4.116	74.5	103.57			
Cell- 10	24.17	4.118	61.8	104.76			
Charging temperature: 45°C							
Cell- 11	24.05	4.209	79.3	109.62	No fire or explosion		
Cell- 12	24.05	4.212	67.2	107.68			
Cell- 13	24.05	4.196	88.1	112.53			
Cell- 14	24.05	4.198	74.5	108.44			
Cell- 15	24.05	4.212	61.8	110.21			
Supplementary information:							
<ul style="list-style-type: none"> - No fire or explosion - No leakage - Leakage - Fire - Explosion - Bulge - Others (please explain) 							

8.3.2	TABLE: External short circuit (battery)					P
Sample No.	Ambient, (°C)	OCV at start of test, (Vdc)	Resistance of circuit, (mΩ)	Maximum case temperature (°C)	Results	
Charging temperature: 10°C						
Battery- 01	55.29	8.231	62.9	55.46	No fire or explosion	
Battery- 02	55.29	8.254	77.3	56.25		
Battery- 03	55.29	8.232	68.5	55.58		
Battery- 04	55.29	8.216	84.7	56.17		
Battery- 05	55.29	8.217	75.6	55.52		
Charging temperature: 45°C						
Battery- 06	55.17	8.428	62.9	56.54	No fire or explosion	
Battery- 07	55.17	8.396	77.3	55.21		

Battery- 08	55.17	8.421	68.5	56.75	
Battery- 09	55.17	8.430	84.7	55.29	
Battery- 10	55.17	8.419	75.6	56.31	

Supplementary information:

- No fire or explosion
- No leakage
- Leakage
- Fire
- Explosion
- Bulge
- Others (please explain)

8.3.3		TABLE: Free fall		P
Sample No.		OCV at start of test, (Vdc)	OCV at removal of thermal free fall, (Vdc)	Results
Cell- 16		4.168	4.168	No fire or explosion
Cell- 17		4.171	4.171	
Cell- 18		4.164	4.164	
Battery- 11		8.344	8.344	
Battery- 12		8.327	8.327	
Battery- 13		8.330	8.330	

Supplementary information:

- No fire or explosion
- No leakage
- Leakage
- Fire
- Explosion
- Bulge
- Others (please explain)

8.3.4		TABLE: Thermal abuse (cells)			P
Sample No.		OCV at start of test, (Vdc)	Ambient, (°C)	Temperature raised at a rate(°C)	Results
Charging temperature: 10°C					
Cell- 19		4.123	130±2	5 °C/min ± 2 °C/min	No fire or explosion
Cell- 20		4.115	130±2	5 °C/min ± 2 °C/min	
Cell- 21		4.108	130±2	5 °C/min ± 2 °C/min	
Cell- 22		4.111	130±2	5 °C/min ± 2 °C/min	
Cell- 23		4.123	130±2	5 °C/min ± 2 °C/min	

Charging temperature: 45°C				
Cell- 24	4.205	130±2	5 °C/min ± 2 °C/min	No fire or explosion
Cell- 25	4.194	130±2	5 °C/min ± 2 °C/min	
Cell- 26	4.208	130±2	5 °C/min ± 2 °C/min	
Cell- 27	4.202	130±2	5 °C/min ± 2 °C/min	
Cell- 28	4.194	130±2	5 °C/min ± 2 °C/min	

Supplementary information:

- No fire or explosion
- No leakage
- Leakage
- Fire
- Explosion
- Bulge
- Others (please explain)

8.3.5	TABLE: Crush (cells)					P
Sample No.	OCV at start of test, (Vdc)	OCV at removal of crushing force, (Vdc)	Width/diameter of cell before crush, (mm)	Required deformation for crush, (mm)	Results	
A cylindrical or prismatic cell is crushed with its longitudinal axis parallel to the flat surfaces of the crushing apparatus. Test only the wide side of prismatic cells.						
Charging temperature: 45°C						
Cell- 34	4.202	4.202	5.18	5.15	No fire or explosion	
Cell- 35	4.208	4.208	5.21	5.19		
Cell- 36	4.214	4.214	5.15	5.12		
Cell- 37	4.192	4.192	5.23	5.21		
Cell- 38	4.208	4.208	5.17	5.15		

Supplementary information:

- No fire or explosion
- No leakage
- Leakage
- Fire
- Explosion
- Bulge
- Others (please explain)

8.3.6	TABLE: Over-charging of battery				P
Supply voltage (Vdc).....	10V			—	
Sample No.	OCV before charging, (Vdc)	Constant charging current (mA)	Maximum outer casing temperature, (°C)	Results	
Battery- 14	6.704	4400	25.8	No fire or explosion	
Battery- 15	6.696	4400	26.4		
Battery- 16	6.702	4400	25.2		
Battery- 17	6.718	4400	25.3		
Battery- 18	6.675	4400	26.1		

Supplementary information:

- No fire or explosion
- No leakage
- Leakage
- Fire
- Explosion
- Bulge
- Others (please explain)

8.3.7	TABLE: Forced discharge (cells)				P
Sample No.	OCV before application of reverse charge, (Vdc)	Measured Reverse charge I_t , (mA)	Time for reversed charge, (minutes)	Results	
Cell- 39	3.356	2200	90	No fire or explosion	
Cell- 40	3.347	2200	90		
Cell- 41	3.351	2200	90		
Cell- 42	3.344	2200	90		
Cell- 43	3.336	2200	90		

Supplementary information:

- No fire or explosion
- No leakage
- Leakage
- Fire
- Explosion
- Bulge
- Others (please explain)

8.3.8 Table for datail data

1. Altitude simulation

No.	Pre-test		After test		Mass loss (%)	Voltage loss (%)	Whether leakage, venting, disassembly, rupture, fire (Y/N)
	Mass (g)	Voltage (V)	Mass (g)	Voltage (V)			
Cell- 39	30.823	4.164	30.823	4.164	0.00	0.00	N
Cell- 40	31.871	4.161	31.871	4.161	0.00	0.00	N
Cell- 41	31.651	4.165	31.651	4.164	0.00	0.01	N
Cell- 42	31.476	4.162	31.476	4.162	0.00	0.00	N
Cell- 43	31.493	4.167	31.493	4.167	0.00	0.00	N
Cell- 44	31.337	4.165	31.334	4.165	0.01	0.00	N
Cell- 45	30.982	4.166	30.982	4.165	0.00	0.01	N
Cell- 46	31.543	4.161	31.543	4.161	0.00	0.00	N
Cell- 47	31.756	4.165	31.756	4.164	0.00	0.01	N
Cell- 48	31.883	4.163	31.883	4.163	0.00	0.00	N

2. Thermal test

No.	Pre-test		After test		Mass loss (%)	Voltage loss (%)	Whether leakage, venting, disassembly, rupture, fire (Y/N)
	Mass (g)	Voltage (V)	Mass (g)	Voltage (V)			
Cell- 39	30.823	4.164	30.814	4.148	0.03	0.38	N
Cell- 40	31.871	4.161	31.862	4.147	0.03	0.34	N
Cell- 41	31.651	4.164	31.647	4.146	0.01	0.44	N
Cell- 42	31.476	4.162	31.471	4.148	0.02	0.34	N
Cell- 43	31.493	4.167	31.487	4.149	0.02	0.43	N
Cell- 44	31.334	4.165	31.331	4.152	0.01	0.31	N
Cell- 45	30.982	4.165	30.975	4.149	0.02	0.39	N
Cell- 46	31.543	4.161	31.534	4.147	0.03	0.34	N
Cell- 47	31.756	4.164	31.751	4.149	0.02	0.37	N
Cell- 48	31.883	4.163	31.874	4.146	0.03	0.41	N


3. Vibration


No.	Pre-test		After test		Mass loss (%)	Voltage loss (%)	Whether leakage, venting, disassembly, rupture, fire (Y/N)
	Mass (g)	Voltage (V)	Mass (g)	Voltage (V)			
Cell- 39	30.814	4.148	30.814	4.147	0.00	0.01	N
Cell- 40	31.862	4.147	31.862	4.147	0.00	0.00	N
Cell- 41	31.647	4.146	31.647	4.146	0.00	0.00	N
Cell- 42	31.471	4.148	31.468	4.148	0.01	0.00	N
Cell- 43	31.487	4.149	31.487	4.148	0.00	0.01	N
Cell- 44	31.331	4.152	31.331	4.152	0.00	0.00	N
Cell- 45	30.975	4.149	30.975	4.149	0.00	0.00	N
Cell- 46	31.534	4.147	31.534	4.146	0.00	0.01	N
Cell- 47	31.751	4.149	31.751	4.149	0.00	0.00	N
Cell- 48	31.874	4.146	31.874	4.146	0.00	0.00	N



4. Shock

No.	Pre-test		After test		Mass loss (%)	Voltage loss (%)	Whether leakage, venting, disassembly, rupture, fire (Y/N)
	Mass (g)	Voltage (V)	Mass (g)	Voltage (V)			
Cell- 39	30.814	4.147	30.814	4.147	0.00	0.00	N
Cell- 40	31.862	4.147	31.858	4.147	0.01	0.00	N
Cell- 41	31.647	4.146	31.647	4.146	0.00	0.00	N
Cell- 42	31.468	4.148	31.468	4.147	0.00	0.02	N
Cell- 43	31.487	4.148	31.487	4.148	0.00	0.00	N
Cell- 44	31.331	4.152	31.331	4.151	0.00	0.01	N
Cell- 45	30.975	4.149	30.975	4.149	0.00	0.00	N
Cell- 46	31.534	4.146	31.534	4.146	0.00	0.00	N
Cell- 47	31.751	4.149	31.749	4.149	0.01	0.00	N
Cell- 48	31.874	4.146	31.874	4.145	0.00	0.01	N

8.3.9	TABLE: Forced internal short circuit (cells)					P		
Sample No.	Chamber ambient, (°C)	OCV at start of test, (Vdc)	Particle location	Maximum applied pressure, (N)	Results			
Charging temperature: 10°C								
Cell- 44	10	4.113	1	800	No fire			
Cell- 45	10	4.121	1	800				
Cell- 46	10	4.118	1	801				
Cell- 47	10	4.127	1	801				
Cell- 48	10	4.114	1	800				
Charging temperature: 45°C								
Cell- 49	45	4.204	1	800	No fire			
Cell- 50	45	4.196	1	800				
Cell- 51	45	4.193	1	801				
Cell- 52	45	4.202	1	800				
Cell- 53	45	4.198	1	800				
Supplementary information:								
1) Identify one of the following:								
1: Nickel particle inserted between positive and negative (active material) coated area.								
2: Nickel particle inserted between positive aluminium foil and negative active material coated area.								
<ul style="list-style-type: none"> - No fire or explosion - No leakage - Leakage - Fire - Explosion - Bulge - Others (please explain) 								

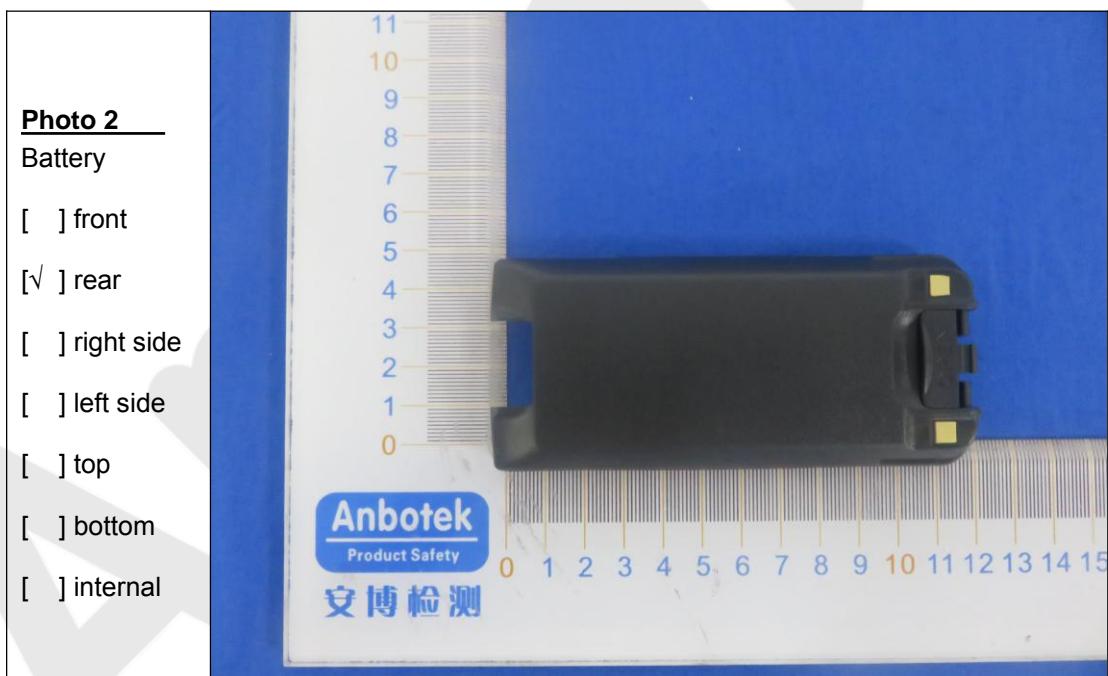

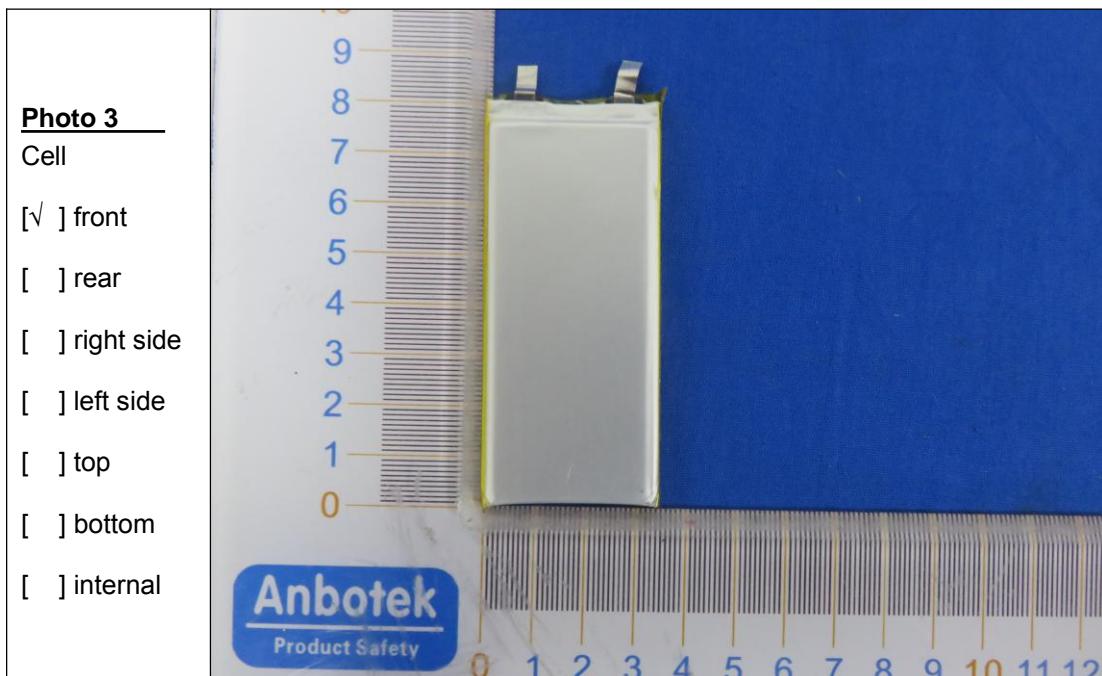

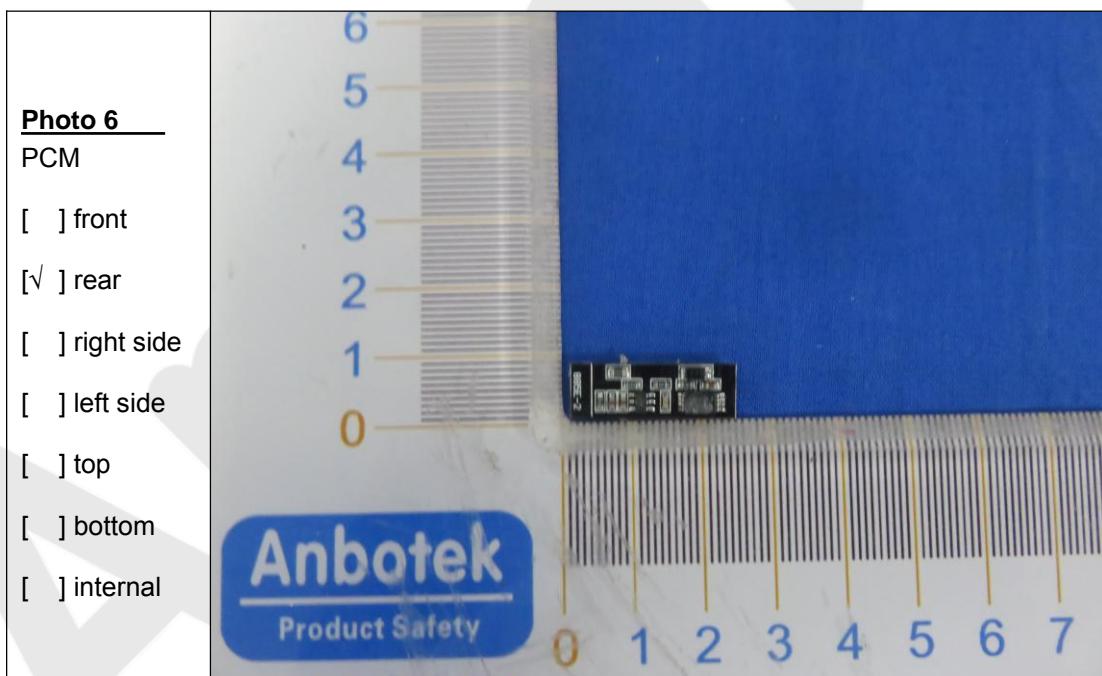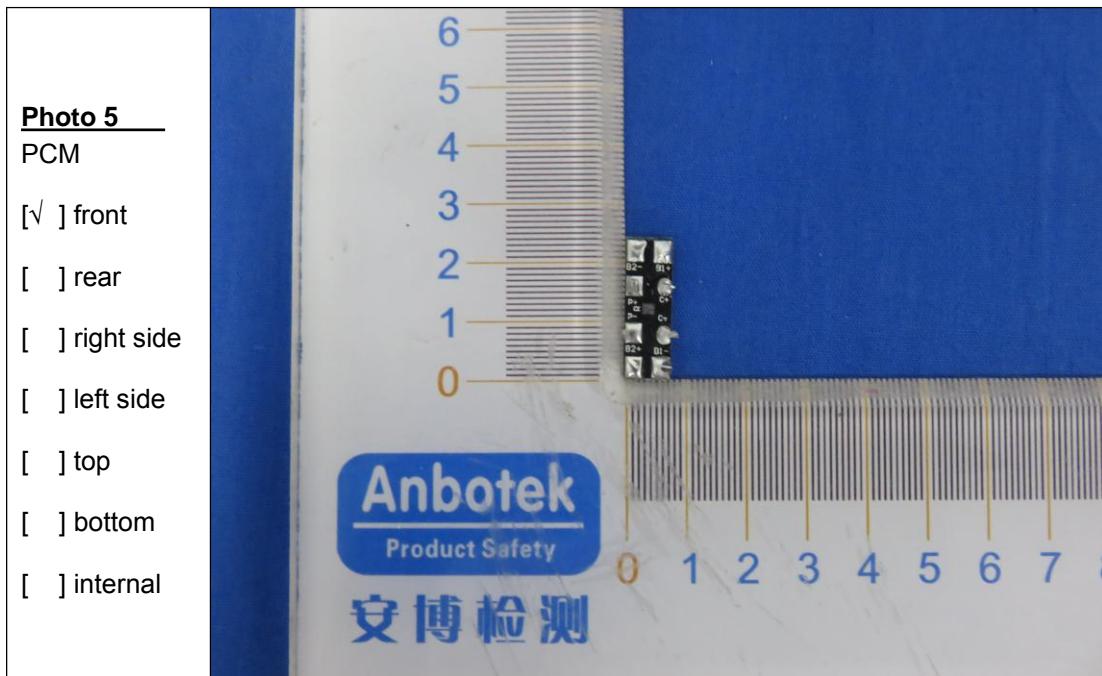

End of the report