


**TS-SERIES TRIPOD PROJECTION SCREEN  
OPERATION MANUAL  
[WWW.FactoryDirectWholesales.COM](http://WWW.FactoryDirectWholesales.COM)**

# Instructions

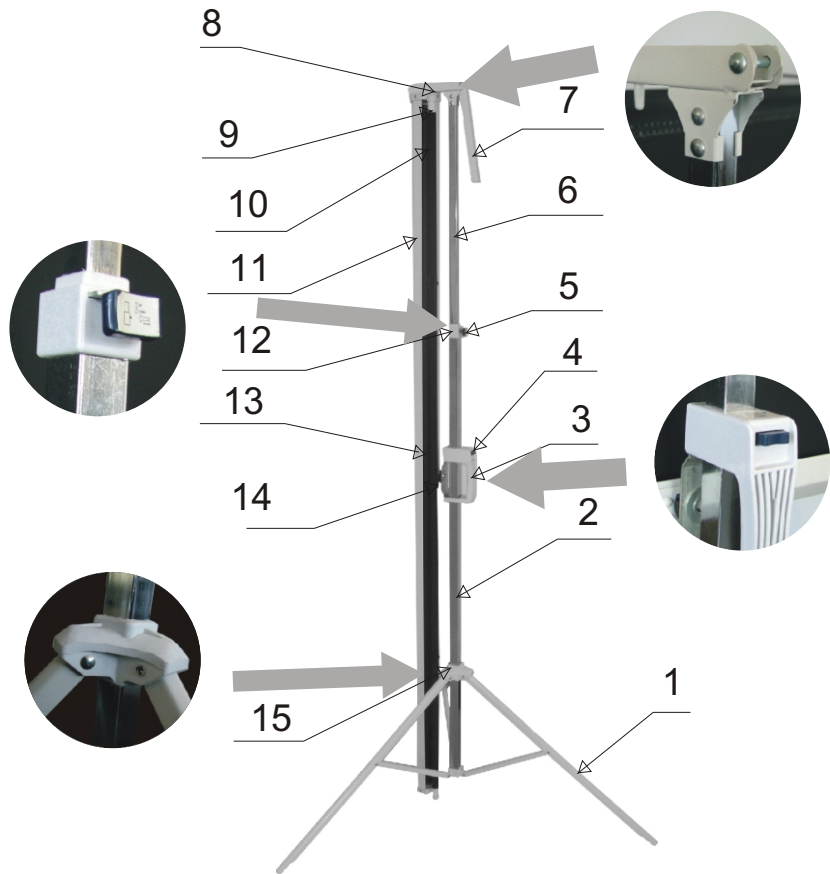

## Installation and operation of the screen

1. Open the packing box and remove all packaging.
2. Place the screen vertically.
3. Press the Tripod Fork(15) a little to ensure that the Tripod is stable.
4. Press the Adjust Key(5) and lift the Drop Tube(6) until you hear a 'click' sound ( Drop Tube locked).The screen housing can now rotate freely.(Keep the opening upward)
5. Open the Tripod(1) to maximum to make it more stable. Then press the Adjust key(5) and lower down the Drop Tube(6) to minimum.
6. Rotate the Rotary Pole(7) to place horizontally on the Topside Tow Bar(8)
7. Hold the housing and pull out the screen slowly.Hang the screen on the rotaed Rotary Pole(7).
8. Now you can adjust the size of screen with Extremity piece of square tube and Handle(3).

Note:There are 3 holes on the Adjust Tube(2),you can press Handle Button to make the screen as 16:9 or 4:3.

- |                                  |                |               |                 |
|----------------------------------|----------------|---------------|-----------------|
| 1.Tripod                         | 2.Adjust tube  | 3.Handle      | 4.Handle button |
| 5.Adjust key                     | 6.Drop key     | 7.Rotary pole |                 |
| 8.Topside tow bar                | 9.Poling       | 10.Screen     | 11.Housing      |
| 12.Extrmity piece of square tube | 13.Hang strip  |               |                 |
| 14.Rotary locking peices         | 15.Tripod fork |               |                 |

Cautions:The tripod and the screen house are heavy, handgle with care.