



CE TEST REPORT

for

Product: SPORTS DV/ACCTION CAMERA

Trade Mark: N/A

Model: 1027+,1027+A,1027+B,1012+,小魔方 A,小魔方 B

Report No.: HTT1501006044ER

Issued Date: Oct.20,2015

Issued for

SHENZHEN BAKER Electronics CO.,LTD

**6/F.A.Building.Huayuan industrial park,The first industrial area of
Fenghuang.fuyong,Bao'an.Shenzhen.China**

Issued By:

Shenzhen HTT Technology Co., Ltd.

**7F,Guangfu Building,Baoyuan Road,Xixiang,Baoan District,
Shenzhen,Guangdong,China**

Note: *This report shall not be reproduced except in full, without the written approval of Shenzhen HTT Technology Co., Ltd. This document may be altered or revised by Shenzhen HTT Technology Co., Ltd. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.*



TABLE OF CONTENTS

1. TEST CERTIFICATION	3
3. EUT DESCRIPTION	5
4. TEST METHODOLOGY	6
4.1. DECISION OF FINAL TEST MODE.....	6
4.2. EUT SYSTEM OPERATION.....	6
5. SETUP OF EQUIPMENT UNDER TEST.....	7
5.1. DESCRIPTION OF SUPPORT UNITS	7
6. FACILITIES AND ACCREDITATIONS.....	8
6.1. FACILITIES.....	8
6.2. ACCREDITATIONS	8
6.3. MEASUREMENT UNCERTAINTY.....	8
7. EMISSION TEST	9
7.1. CONDUCTED EMISSION MEASUREMENT.....	9
7.2. RADIATED EMISSION MEASUREMENT	12
7.3. DISTURBANCE POWER MEASUREMENT	17
7.4. HARMONICS CURRENT MEASUREMENT.....	20
7.5. VOLTAGE FLUCTUATION AND FLICKS MEASUREMENT	26
8. IMMUNITY TEST	29
8.1. GENERAL DESCRIPTION	29
8.2. GENERAL PERFORMANCE CRITERIA DESCRIPTION.....	29
8.3. ELECTROSTATIC DISCHARGE (ESD)	30
8.4. ELECTRICAL FAST TRANSIENT (EFT)	34
9. PHOTOGRAPHS OF THE TEST CONFIGURATION	37



1. TEST CERTIFICATION

Product: SPORTS DV/ACCTION CAMERA

Model: 1027+

Applicant: SHENZHEN BAKER Electronics CO.,LTD

6/F.A.Building.Huayuan industrial park,The first industrial area of Fenghuang.fuyong,Bao'an.Shenzhen.China

Manufacturer: SHENZHEN BAKER Electronics CO.,LTD

6/F.A.Building.Huayuan industrial park,The first industrial area of Fenghuang.fuyong,Bao'an.Shenzhen.China

Trade Mark: N/A

Tested: Oct.14,2015-Oct.20,2015

Applicable Standards: EN 55013:2013
EN 55020: 2007+A11:2011
EN 61000-3-2:2014
EN 61000-3-3:2013

Deviation from Applicable Standard

None

The above equipment has been tested by Shenzhen HTT Technology Co., Ltd. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By: Jack Chen

Date: Oct.20,2015

Check By: Owen Hu

Date: Oct.20,2015

Approved By: Kevin
(Kevin)

Date: Oct.20,2015





2. TEST RESULT SUMMARY

EMISSION			
Standard	Item	Result	Remarks
EN 55013:2013	Conducted (Main Port)	PASS	Meets the requirements
	Radiated	PASS	Meets the requirements
	Disturbance Power on AC& Signal Port	PASS	Meets the requirements
EN 61000-3-2:2014	Harmonic current emissions	PASS	Meets the requirements
EN 61000-3-3: 2013	Voltage fluctuations & flicker	PASS	Meets the requirements

IMMUNITY 【EN55020:2007+A11:2011】			
Standard	Item	Result	Remarks
EN 61000-4-2: 2009	ESD	PASS	Meets the requirements of Performance Criterion B
EN 61000-4-4: 2012	EFT	PASS	Meets the requirements of Performance Criterion B
EN 55020: 2007+AC:2011	Immunity Against Input Interference (S1)	PASS	Meets the requirements
EN 55020: 2007+AC:2011	Immunity Against RFI Voltage (S2a)	PASS	Meets the requirements
EN 55020: 2007+AC:2011	Immunity Against RFI Current (S2b)	PASS	Meets the requirements
EN 55020: 2007+AC:2011	Immunity Against Radiated RFI (S3)	PASS	Meets the requirements
EN 55020: 2007+AC:2011	Screening Effectiveness (S4)	PASS	Meets the requirements
EN 55020: 2007+AC:2011	Keyed Carrier (S5)	PASS	Meets the requirements
EN 55020: 2007+AC:2011	Immunity Against Radiated RFI For Large EUT (S6)	PASS	Meets the requirements

- Note:**
1. The test result judgment is decided by the limit of test standard
 2. The information of measurement uncertainty is available upon the customer's request.



3. EUT DESCRIPTION

Product	SPORTS DV/ACCTION CAMERA
Trade Mark	N/A
Model	1027+
Applicant	SHENZHEN BAKER Electronics CO.,LTD
Housing material	Plastic& Metal
EUT Type	<input checked="" type="checkbox"/> Engineering Sample. <input type="checkbox"/> Product Sample, <input type="checkbox"/> Mass Product Sample.
Serial Number	N/A
Power Rating	N/A
AC Line	N/A

I/O PORT

I/O PORT TYPES	Q'TY	TESTED WITH
N/A	N/A	<input checked="" type="checkbox"/>

Model list and Models difference

No.	Model Number	Tested With
1	1027+	<input checked="" type="checkbox"/>
Other models	1027+A,1027+B,1012+,小魔方 A,小魔方 B	<input type="checkbox"/>

NOTE: 1027+ is tested model, other models are derivative models, The models are identical in circuit , only different on the model names, size,and capacity, So the test data of 1027+ can represent the remaining models.



4. TEST METHODOLOGY

4.1. DECISION OF FINAL TEST MODE

The EUT was tested together with the thereafter additional components, and a configuration, which produced the worst emission levels, was selected and recorded in this report.

The following test mode(s) were scanned during the preliminary test:

Pre-Test Mode		
Mode Emission	Conducted Emission	Mode :Working
	Radiated Emission	Mode :Working
	Disturbance Power	Mode :Working

After the preliminary scan, the following test mode was found to produce the highest emission level.

The Worst Test Mode		
Emission	Conducted Emission	Mode :Working
	Radiated Emission	Mode :Working
	Disturbance Power	Mode :Working

4.2. EUT SYSTEM OPERATION

1. Set up EUT with the support equipments.
2. Make sure the EUT work normally during the test.



5. SETUP OF EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Note:

- 1) All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2) Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



6. FACILITIES AND ACCREDITATIONS

6.1. FACILITIES

All measurement facilities used to collect the measurement data are located at Shenzhen HTT Technology Co., Ltd.

The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6.2. ACCREDITATIONS

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC
Japan	VCCI
Canada	INDUSTRY CANADA
Germany	TUV
	Phoenix

6.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency		Uncertainty
Conducted emissions	9kHz~30MHz		+/- 3.59dB
Radiated emissions	Horizontal	30MHz ~ 200MHz	+/- 4.77dB
		200MHz ~1000MHz	+/- 4.93dB
	Vertical	30MHz ~ 200MHz	+/- 5.04dB
		200MHz ~1000MHz	+/- 4.93dB
Disturbance Power	30MHz ~ 300MHz		+/- 1.27dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



7. EMISSION TEST

7.1. CONDUCTED EMISSION MEASUREMENT

7.1.1. LIMITS

FREQUENCY (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The lower limit shall apply at the transition frequencies.
- (2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
- (3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

7.1.2. TEST INSTRUMENTS

Conducted Emission Shielding Room Test Site (843)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESCI	100005	06/23/2016
LISN	AFJ	LS16	16010222119	06/22/2016
LISN(EUT)	Mestec	AN3016	04/10040	06/22/2016

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).
2. N.C.R = No Calibration Request.



7.1.3. TEST PROCEDURES

Procedure of Preliminary Test

The EUT and Support equipment, if needed, was set up as per the test configuration to simulate typical usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per CISPR13/EN55013 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor standing equipment, it is placed on the ground plane, which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.

All I/O cables were positioned to simulate typical actual usage as per CISPR13/EN55013.

All support equipment power received from a second LISN.

The EUT test program was started. Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150kHz to 30MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in Item 3.1 were scanned during the preliminary test.

After the preliminary scan, we found the test mode described in Item 3.1 producing the highest emission level.

The EUT configuration and cable configuration of the above highest emission levels were recorded for reference of the final test.

Procedure of Final Test


EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.



7.1.4. TEST SETUP

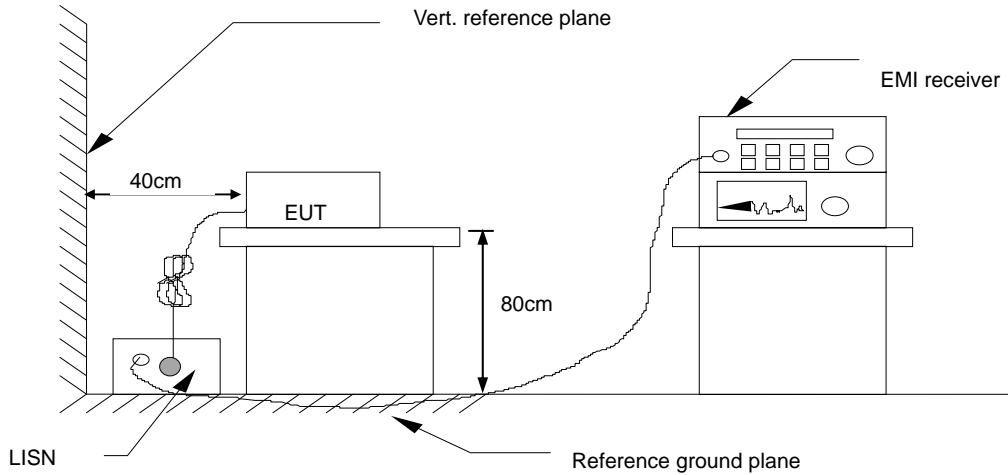

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

7.1.5. TEST RESULTS

6dB Bandwidth	10 KHz	Environmental Conditions	26°C, 55% RH
Test Mode	Working	Detector Function	Peak / Quasi-peak/AV
Test By	Jack Chen	Test Result	N/A

NOTE: 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).

2. “---” denotes the emission level was or more than 2dB below the Average limit, so no re-check anymore.

- Freq. = Emission frequency in MHz
- Reading level(dBuV) = Receiver reading
- Corr. Factor (dB) = Antenna factor + Cable loss
- Level (dBuV) = Reading level(dBuV) + Corr. Factor (dB)
- Limit (dBuV) = Limit stated in standard
- Margin (dB) = Level (dBuV) – Limits (dBuV)
- Q.P.=Quasi-Peak



7.2. RADIATED EMISSION MEASUREMENT

7.2.1. LIMITS

Source	FREQUENCY (MHz)	dBuV/m (At 3m)
Local Oscillar	≤ 1000	Fundamental 57
	30~300	Harmonics 52
	300~1000	Harmonics 56
Others	30 ~ 230	40
	230 ~ 1000	47

NOTE: (1) The lower limit shall apply at the transition frequencies.
(2) Emission level (dBuV/m) = 20 log Emission level (uV/m).

7.2.2. TEST INSTRUMENTS

Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESCI	100005	06/23/2016
Spectrum Analyzer	R&S	FSU	100114	06/21/2016
Pre Amplifier	H.P.	HP8447E	2945A02715	06/25/2016
Bilog Antenna	SUNOL Sciences	JB3	A021907	06/20/2016
Cable	TIME MICROWAVE	LMR-400	N-TYPE04	06/29/2016
System-Controller	CCS	N/A	N/A	N.C.R
Turn Table	CCS	N/A	N/A	N.C.R
Antenna Tower	CCS	N/A	N/A	N.C.R

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).
2. N.C.R = No Calibration Request.



7.2.3. TEST PROCEDURE

Procedure of Preliminary Test

The equipment was set up as per the test configuration to simulate typical usage per the user's manual. When the EUT is a tabletop system, a wooden turntable with a height of 0.8 meters is used which is placed on the ground plane. When the EUT is a floor standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.

Support equipment, if needed, was placed as per CISPR13/EN55013.

All I/O cables were positioned to simulate typical usage as per CISPR13/EN55013.

from the outlet socket under the turntable. All support equipment power received from another socket under the turntable.

Mains cables, telephone lines or other connections to auxiliary equipment located outside the test are shall drape to the floor, be fitted with ferrite clamps or ferrite tubes placed on the floor at the point where the cable reaches the floor and then routed to the place where they leave the turntable. No extension cords shall be used to mains receptacle.

The antenna was placed at 10 meter away from the EUT as stated in CISPR13/EN55013. The antenna connected to the Spectrum Analyzer via a cable and at times a pre-amplifier would be used.

The Analyzer / Receiver quickly scanned from 30MHz to 1000MHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.

The test mode(s) described in Item 3.1 were scanned during the preliminary test:

After the preliminary scan, we found the test mode described in Item 3.1 producing the highest emission level. The EUT and cable configuration, antenna position, polarization and turntable position of the above highest emission level were recorded for the final test.

Procedure of Final Test

EUT and support equipment were set up on the turntable as per the configuration with highest emission level in the preliminary test.


The Analyzer / Receiver scanned from 30MHz to 1000MHz. Emissions were scanned and measured rotating the EUT to 360 degrees, varying cable placement and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.

Recorded at least the six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit and only Q.P. reading is presented.



The test data of the worst-case condition(s) was recorded.

7.2.4. TEST SETUP

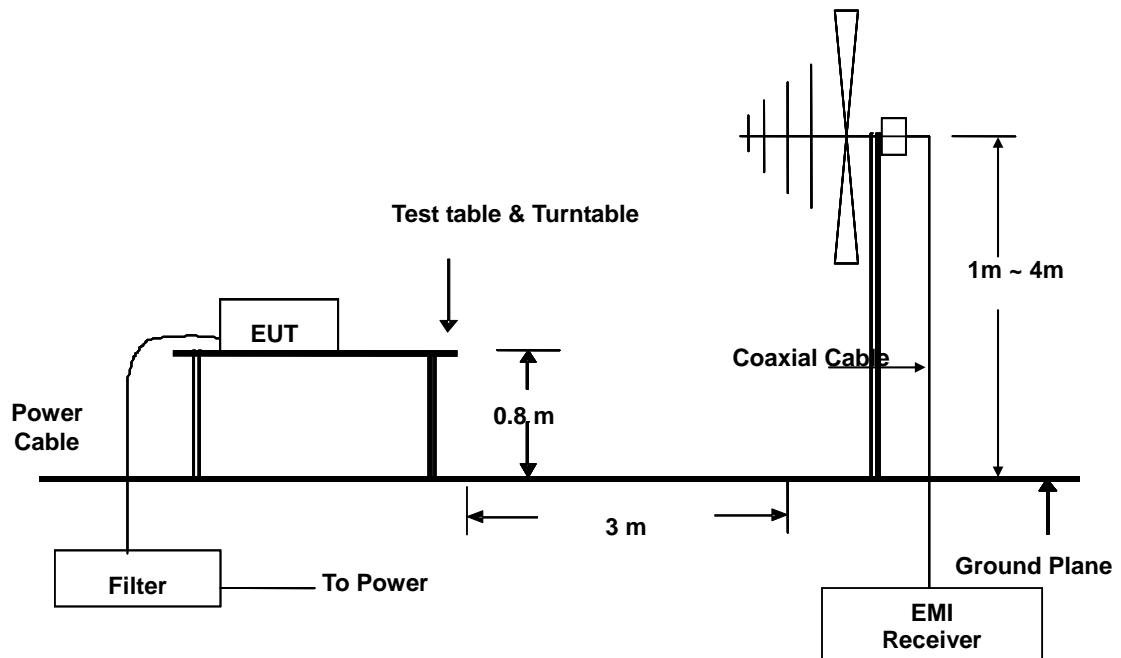


For the actual test configuration, please refer to the related item – Photographs of the Test Configuration

7.2.5 TEST RESULTS



Radiated Emission Measurement

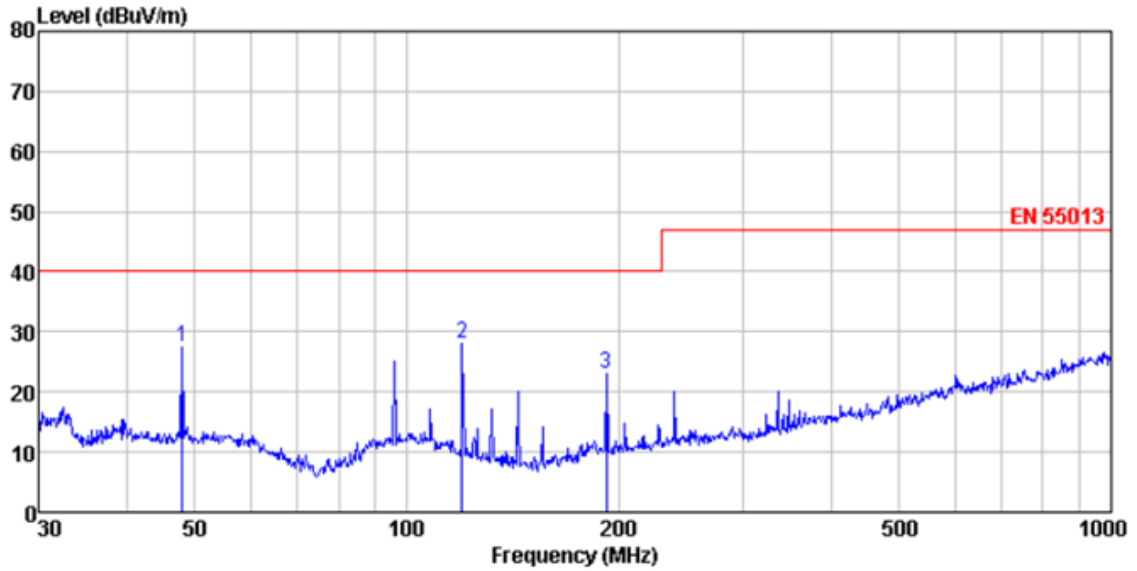

Site : 3m chamber
 Condition : EN_55013 3m VULB9163-2013M VERTICAL
 EUT :
 Model :
 Test mode :
 Power Rating :
 Test Engineer: Chen

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	47.994	41.49	15.36	0.75	30.01	27.59	40.00	-12.41 Peak
2	119.856	43.82	12.48	1.36	29.57	28.09	40.00	-11.91 Peak
3	191.745	37.85	12.56	1.80	29.23	22.98	40.00	-17.02 Peak



7.3. DISTURBANCE POWER MEASUREMENT

7.3.1. LIMITS

FREQUENCY (MHz)	Quasi-Peak (dBuV/m)	Average (dBuV/m)
30 ~ 300	45 – 55	35 – 45

NOTE: (1) The lower limit shall apply at the transition frequency.

7.3.2. TEST INSTRUMENTS

Shielding Room(743)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESCS30	100343	06/29/2016
ABSORBING CLAMP	FCC	F-201-23mm	160	06/26/2016
CABLE	TIME MICROWAVE	LMR-400	N-TYPE04	06/28/2016

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).
2. N.C.R = No Calibration Request.



7.3.3. TEST PROCEDURE

Procedure of Preliminary Test

The EUT is placed on a 0.8 meters height wooden table above the ground plane, and kept at least 0.8 m from other metallic object. The straight portion of main lead would put on 6 m long testing bench of (if main lead is shorter than 6 m it should be extended) as per CISPR 13/EN 55013.

Any lead connecting the main appliance to an auxiliary apparatus is disconnected if this does not affect the operation of the appliance, or is isolated by means of ferrite rings (or an absorbing clamp) close to the appliance.

The EUT received DC5V from battery All support equipment power received from another socket under the turntable.

The EUT test program was started. Emissions were scanned and measured using a receiver connected to the absorbing clamp.

The absorbing clamp is positioned for maximum indication at each test frequency (30MHz to 300MHz), that means is clamp moved along the main lead until the maximum emission value is found.

The test mode(s) described in Item 3.1 were scanned during the preliminary test:

After the preliminary scan, we found the test mode described in Item 3.1 producing the highest emission level.

The EUT and cable configuration, antenna position, polarization and turntable position of the above highest emission level were recorded for the final test.

Procedure of Final Test


EUT and support equipment were set up on the wooden table as per step 6 of the preliminary test.

The receiver scanned from 30MHz to 300MHz. Emissions were scanned and measured to moving the absorbing clamp along the main lead until the maximum emission value is found.

Recorded at least the six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit and only Q.P. reading is presented.

The test data of the worst-case condition(s) was recorded.

7.3.4. TEST SETUP

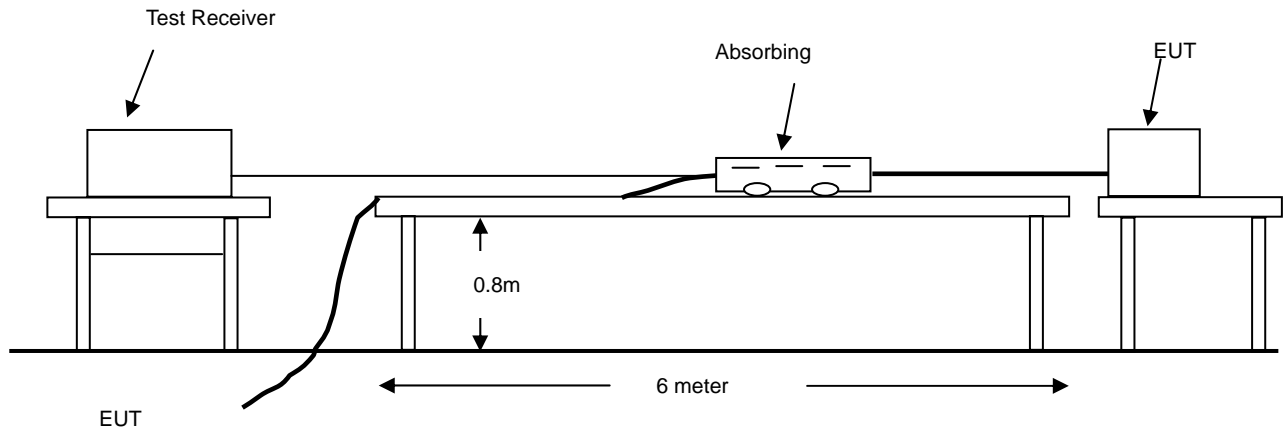

For the actual test configuration, please refer to the related item - Photographs of the Test Configuration.

7.3.5. TEST RESULTS:

Test Mode	Working	Environmental Conditions	26°C, 55% RH
6dB Bandwidth	120 KHz	Detector Function	Peak / Quasi-Peak/AV
Test By	Jack Chen	Test Result	Pass

Freq. = Emission frequency in MHz

Reading level(dBpW) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss

Measurement (dBpW) = Reading level(dBpW) + Corr. Factor (dB)

Limit (dBpW) = Limit stated in standard

Margin (dB) = Measurement (dBpW) – Limits (dBpW)



7.4. HARMONICS CURRENT MEASUREMENT

7.4.1. LIMITS OF HARMONICS CURRENT MEASUREMENT

Limits for Class A equipment		Limits for Class D equipment		
Harmonics Order n	Max. permissible harmonics current A	Harmonics Order n	Max. permissible harmonics current per watt mA/W	Max. permissible harmonics current A
Odd harmonics		Odd Harmonics only		
3	2.30	3	3.4	2.30
5	1.14	5	1.9	1.14
7	0.77	7	1.0	0.77
9	0.40	9	0.5	0.40
11	0.33	11	0.35	0.33
13	0.21	13	0.30	0.21
15<=n<=39	0.15x15/n	15<=n<=39	3.85/n	0.15x15/n
Even harmonics				
2	1.08			
4	0.43			
6	0.30			
8<=n<=40	0.23x8/n			

- NOTE:** 1. Class A and Class D are classified according to item 4.4.3.
2. According to section 7 of EN 61000-3-2, the above limits apply for all equipments with a rated power more than 75W, except for lighting equipment.

7.4.2. TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Harmonic & Flicker Tester	California instruments	PACS-3	SB2588/01	06/20/2016
AC Power Source	California instruments	5001iX-CTS-40	SB2588	06/20/2016

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



7.4.3. TEST PROCEDURE

The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the maximum harmonic components under Standard Mode operating conditions for each successive harmonic component in turn.

The classification of EUT is according to section 5 of EN 61000-3-2.


The EUT is classified as follows:

- Class A: Balanced three-phase equipment, Household appliances excluding equipment as Class D, Tools excluding portable tools, Dimmers for incandescent lamps, audio equipment, equipment not specified in one of the three other classes.
- Class B: Portable tools; Arc welding equipment which is not professional equipment.
- Class C: Lighting equipment.
- Class D: Equipment having a specified power less than or equal to 600 W of the following types: Personal computers and personal computer monitors and television receivers.

The correspondent test program of test instrument to measure the current harmonics emanated from EUT is chosen. The measure time shall be not less than the time necessary for the EUT to be exercised.



7.4.4. TEST SETUP

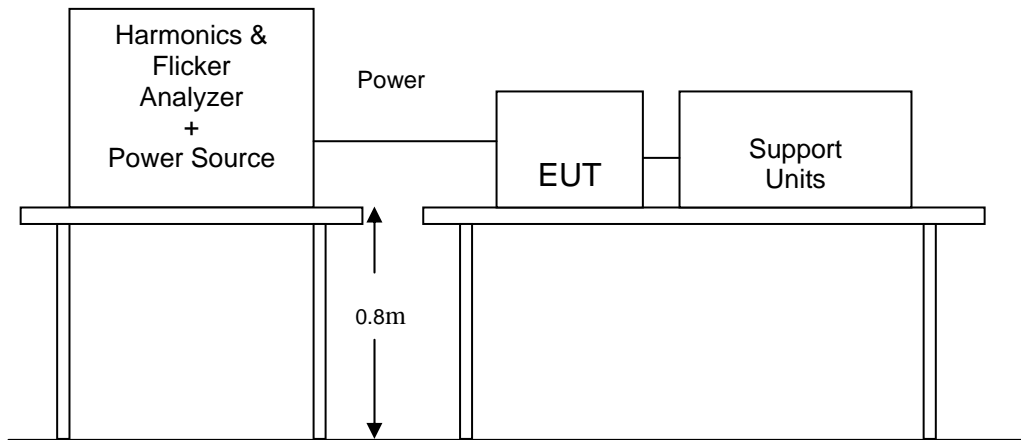

For the actual test configuration, please refer to the related item .

7.4.5. TEST RESULTS

POWER CONSUMPTION	12W	Test Results	Pass
ENVIRONMENTAL CONDITIONS	24.5deg.C, 56% RH, 992 hPa	Limits	Class <input type="checkbox"/> A <input type="checkbox"/> B <input checked="" type="checkbox"/> C <input type="checkbox"/> D <input type="checkbox"/> N/A
Test Mode	Working	Tested by	Jack Chen

NOTE: 1. Limits classified according to item 7.3.1.

2. There is no need for Harmonics test to be performed on this product(rated power is less than 75W) in accordance with EN 61000-3-2:2014.

For further details, please refer to Clause 7 of EN 61000-3-2:2014 which states:

“For the following categories of equipment, limits are not specified in this edition of the standard: equipment with a rated power of 75W or less, other than lighting equipment.”




Harmonics – Class-C per A-14(Run time)


Test category: Class-C per A-14 (European limits) Test Margin: 100
Start time: 8:49:26 End time: 8:52:07
Test duration (min): 2.5 Data file name: H-000895.cts_data
Comment: Working Temp: 24.5'C Humi: 56%

Test Result: Pass Source qualification: Normal

Current & voltage waveforms

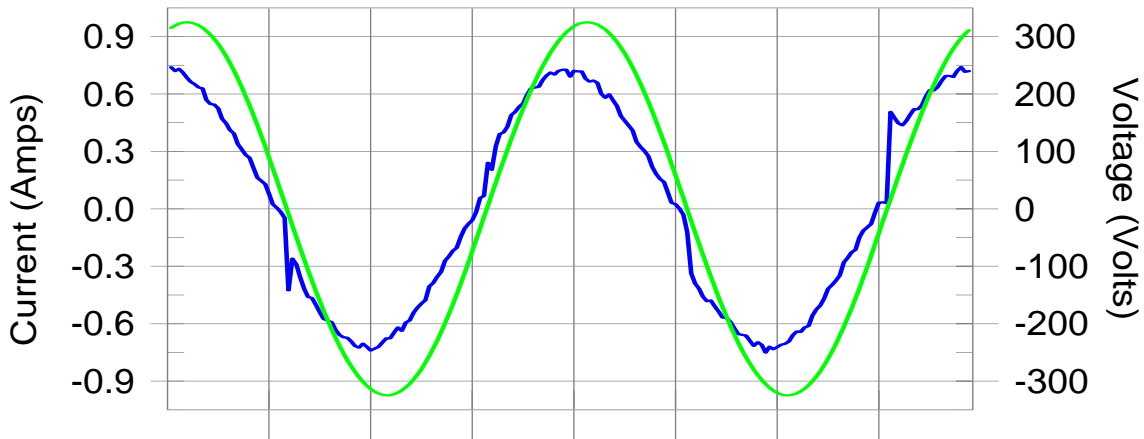

Harmonics and Class C limit line European Limits

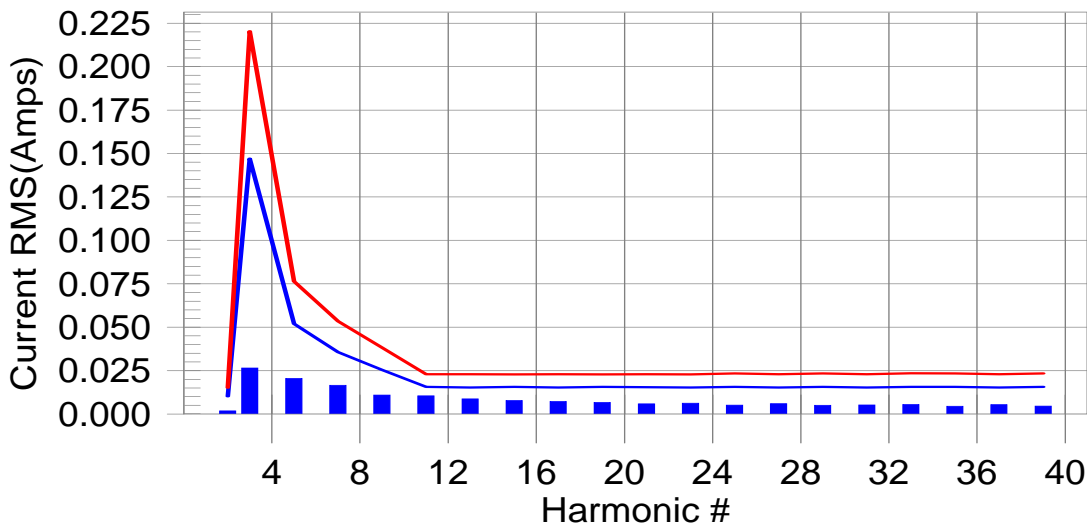

Test result: Pass Worst harmonic was #11 with 45.82% of the limit.



Current Test Result Summary (Run time)

Test category: Class-C per A-14 (European limits) Test Margin: 100

Start time: 8:49:26 End time: 8:52:07

Test duration (min): 2.5 Data file name: H-000895.cts_data

Comment: Working Temp: 24.5'C Humi: 56%

Test Result: Pass Source qualification: Normal

THC(A): 0.05 I-THD(pk%): 9.00 POHC(A): 0.015 POHC Limit(A): 0.047

Highest parameter values during test:

V_RMS (Volts): 229.69	Frequency(Hz):
I_Peak (Amps): 0.794	I_RMS (Amps): 0.523
I_Fund (Amps): 0.520	Crest Factor: 1.523
Power (Watts): 100	Power Factor: 0.965

Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.001	0.010	14.2	0.002	0.015	12.15	Pass
3	0.025	0.147	16.7	0.026	0.220	12.01	Pass
4	0.000						
5	0.020	0.052	38.4	0.021	0.076	26.90	Pass
6	0.000						
7	0.016	0.036	44.7	0.017	0.053	30.99	Pass
8	0.000						
9	0.011	0.025	41.3	0.011	0.038	28.78	Pass
10	0.000						
11	0.010	0.016	66.2	0.010	0.023	45.82	Pass
12	0.000						
13	0.008	0.015	55.0	0.009	0.023	38.19	Pass
14	0.000						
15	0.008	0.016	49.4	0.008	0.023	34.06	Pass
16	0.000						
17	0.007	0.015	45.4	0.007	0.023	31.72	Pass
18	0.000						
19	0.007	0.016	41.9	0.007	0.023	29.19	Pass
20	0.000						
21	0.006	0.016	36.6	0.006	0.023	25.67	Pass



22	0.000						
23	0.006	0.015	38.8	0.006	0.023	27.14	Pass
24	0.000						
25	0.005	0.016	31.2	0.005	0.023	21.99	Pass
26	0.000						
27	0.006	0.015	36.8	0.006	0.023	26.23	Pass
28	0.000						
29	0.005	0.016	29.9	0.005	0.023	21.30	Pass
30	0.000						
31	0.005	0.015	31.9	0.005	0.023	22.61	Pass
32	0.000						
33	0.005	0.016	32.4	0.005	0.023	23.34	Pass
34	0.000						
35	0.004	0.016	26.8	0.004	0.023	19.17	Pass
36	0.000						
37	0.005	0.015	33.3	0.005	0.023	23.60	Pass
38	0.000						
39	0.004	0.016	26.7	0.005	0.023	19.51	Pass
40	0.000						

Note: Dynamic limits were applied for this test. The highest harmonics values in the above table may not occur at the same window as the maximum harmonics/limit ratio.



7.5. VOLTAGE FLUCTUATION AND FLICKS MEASUREMENT

7.5.1. LIMITS OF VOLTAGE FLUCTUATION AND FLICKS MEASUREMENT

TEST ITEM	LIMIT	REMARK
P_{st}	1.0	P_{st} means short-term flicker indicator.
P_{lt}	0.65	P_{lt} means long-term flicker indicator.
T_{dt} (ms)	500	T_{dt} means maximum time that dt exceeds 3 %.
d_{max} (%)	4%	d_{max} means maximum relative voltage change.
dc (%)	3.3%	dc means relative steady-state voltage change

7.5.2. TEST INSTRUMENTS

IMMUNITY SHIELDED ROOM				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Harmonic & Flicker Tester	California instruments	PACS-3	SB2588/01	06/20/2016
AC Power Source	California instruments	5001iX-CTS-40	SB2588	06/20/2016

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).


7.5.3. TEST PROCEDURE

The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the most unfavorable sequence of voltage changes under Standard Mode operating conditions.

During the flick measurement, the measure time shall include that part of whole operation cycle in which the EUT produce the most unfavorable sequence of voltage changes. The observation period for short-term flicker indicator is 10 minutes and the observation period for long-term flicker indicator is 2 hours.



7.5.4. TEST SETUP

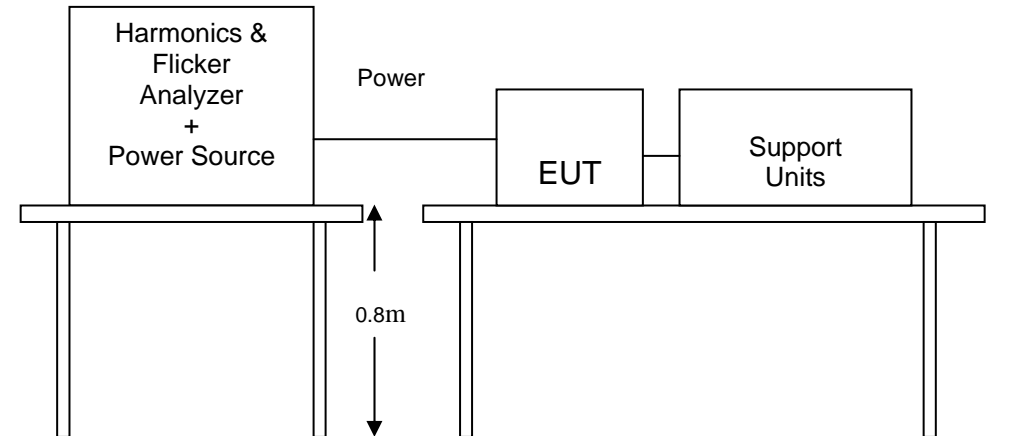

For the actual test configuration, please refer to the related item .

7.5.5. TEST RESULTS

OBSERVATION PERIOD (Tp)	10mins	Test Mode	Working
ENVIRONMENTAL CONDITIONS	24.5deg.C, 56% RH, 992 hPa	Tested by:	Jack Chen
Test Result	Pass		




Flicker Test Summary

Test category: All parameters (European limits) **Test Margin: 100**
Start time: 11:19:05 **End time: 11:29:25**
Test duration (min): 10 **Data file name: F-000805.cts_data**
Comment: Working
Test Result: Pass **Status: Test Completed**

Pst_i and limit line

European Limits

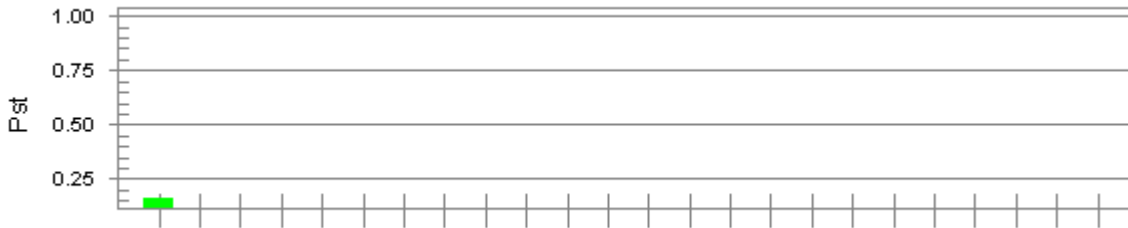

Plt and limit line



Parameter values recorded during the test:

Vrms at the end of test (Volt):	230.03			
Highest dt (%):	0.00	Test limit (%):	3.30	Pass
Time(mS) > dt:	0.0	Test limit (mS):	500.0	Pass
Highest dc (%):	0.00	Test limit (%):	3.30	Pass
Highest dmax (%):	0.00	Test limit (%):	4.00	Pass
Highest Pst (10 min. period):	0.160	Test limit:	1.000	Pass
Highest Plt (2 hr. period):	0.070	Test limit:	0.650	Pass



8 .IMMUNITY TEST

8.1. GENERAL DESCRIPTION

Product Standard	EN55020: 2007+A11:2011	
	Test Type	Minimum Requirement
Basic Standard, Specification, and Performance Criterion required	EN 61000-4-2	Electrostatic Discharge - ESD: 8kV air discharge, 4kV Contact discharge, Performance Criterion B
	EN 61000-4-4	Electrical Fast Transient/Burst - EFT, Power line: 1kV, Signal line: 0.5kV, Performance Criterion B
	Immunity Against Input Interference (S1)	N/A
	Immunity Against RFI Voltage (S2a)	N/A
	Immunity Against RFI Current (S2b)	N/A
	Immunity Against Radiated RFI (S3)	N/A
	Screening Effectiveness (S4)	N/A
	Keyed Carrier (S5)	N/A
	Immunity Against Radiated RFI For Large EUT (S6)	N/A

8.2. GENERAL PERFORMANCE CRITERIA DESCRIPTION

Criteria A:	The equipment shall continue to operate as intended during the test. No change of actual operating state is allowed as a result of the application of the test. Multifunction equipment shall for each function meet the relevant requirements. Evaluation is carried out for audio and video functions. The equipment is supposed to operate as intended if the criteria of clause 4.1.1.1 and/or 4.1.1.2 of standard EN 55020:2007 are fulfilled.
Criteria B:	The equipment shall continue to operate as intended after the test. No loss of function is allowed after the test when the apparatus is used as intended, but failures which are recovered automatically but which cause temporary delay in processing, are permissible. No change of actual operating state for example change of channel or stored data and settings is allowed as a result of the application of the test. During the test, degradation of performance is allowed.



8.3. ELECTROSTATIC DISCHARGE (ESD)

8.3.1. TEST SPECIFICATION

Basic Standard:	EN 61000-4-2
Discharge Impedance:	330ohm
Charging capacity:	150pF
Discharge Voltage:	Air Discharge: 8 kV (Direct) Contact Discharge: 4 kV (Direct/Indirect)
Polarity:	Positive & Negative
Number of Discharge:	Minimum 10 times at each test point
Discharge Mode:	Single Discharge 1 second minimum
Performance criterion:	B

8.3.2. TEST INSTRUMENT

IMMUNITY SHIELDED ROOM				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
ESD 2000	EMC PARTNER	ESD2000	182	06/22/2016

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



8.3.3. TEST PROCEDURE

The discharges shall be applied in two ways:

a) Contact discharges to the conductive surfaces and coupling planes:

Twenty dischargers (10 with positive and 10 with negative polarity) shall be applied on each accessible metallic part of the enclosure, terminals are excluded. In case of a non-conductive enclosure, dischargers shall be applied on the horizontal or vertical coupling planes. Test shall be performed at a maximum repetition rate of one discharge per second.

b) Air discharges at slots and apertures and insulating surfaces:

On those parts of the EUT where it is not possible to perform contact discharge testing, the equipment should be investigated to identify user accessible points where breakdown may occur. Such points are tested using the air discharge method. This investigation should be restricted to those area normally handled by the user. A minimum of 10 single air discharges shall be applied to the selected test point for each such area.

The basic test procedure was in accordance with IEC 61000-4-2:

a) The EUT was located 0.1 m minimum from all side of the **HCP** (dimensions 1.6m x 0.8m).

b) The support units were located another table 30 cm away from the EUT, but direct support unit was/were located at same location as EUT on the HCP and keep at a distance of 10 cm with EUT.

c) The time interval between two successive single discharges was at least 1 second.


d) Contact discharges were applied to the non- insulating coating, with the pointed tip of the generator penetrating the coating and contacting the conducting substrate.

e) Air discharges were applied with the round discharge tip of the discharge electrode approaching the EUT as fast as possible (without causing mechanical damage) to touch the EUT. After each discharge, the ESD generator was removed from the EUT and re-triggered for a new single discharge. The test was repeated until all discharges were complete.

f) At least ten single discharges (in the most sensitive polarity) were applied at the front edge of each **HCP** opposite the center point of each unit of the EUT and 0.1 meters from the front of the EUT. The long axis of the discharge electrode was in the plane of the **HCP** and perpendicular to its front edge during the discharge.

g) At least ten single discharges (in the most sensitive polarity) were applied to the center of one vertical edge of the **Vertical Coupling Plane (VCP)** in sufficiently different positions that the four faces of the EUT were completely illuminated. The **VCP** (dimensions 0.5m x 0.5m) was placed vertically to and 0.1 meters from the EUT.

8.3.4. TEST SETUP

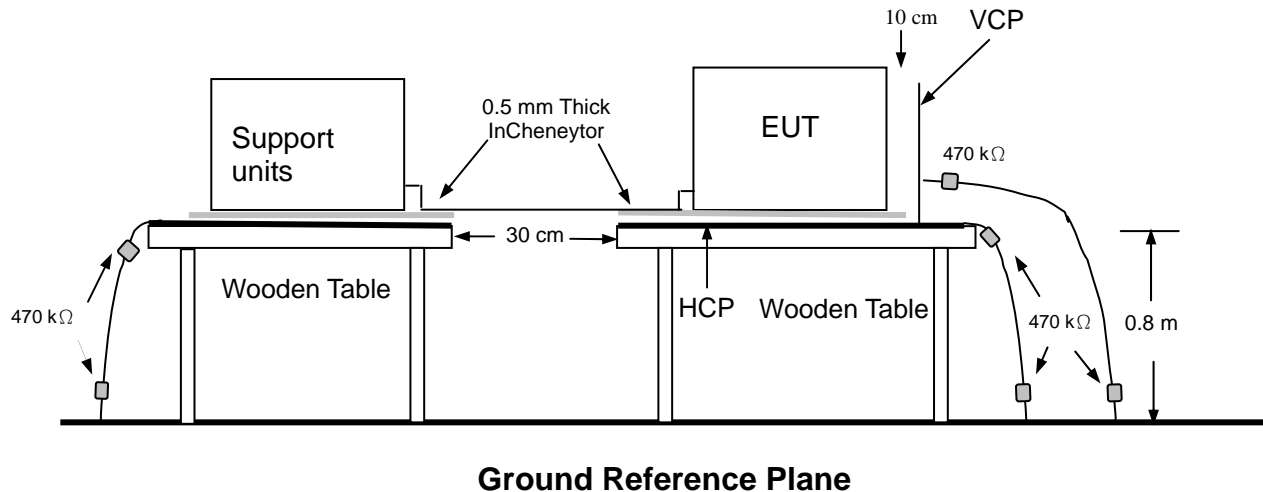

For the actual test configuration, please refer to the related item - Photographs of the Test Configuration.

NOTE:

TABLE-TOP EQUIPMENT

The configuration consisted of a wooden table 0.8 meters high standing on the **Ground Reference Plane**. The **GRP** consisted of a sheet of aluminum at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system. A **Horizontal Coupling Plane** (1.6m x 0.8m) was placed on the table and attached to the **GRP** by means of a cable with 940k total impedance. The equipment under test, was installed in a representative system as described in section 7 of EN 61000-4-2, and its cables were placed on the **HCP** and isolated by an insulating support of 0.5mm thickness. A distance of 1-meter minimum was provided between the EUT and the walls of the laboratory and any other metallic structure.

FLOOR-STANDING EQUIPMENT

The equipment under test was installed in a representative system as described in section 7 of IEC 61000-4-2, and its cables were isolated from the Ground Reference Plane by an insulating support of 0.1-meter thickness. The GRP consisted of a sheet of aluminum that is at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system and extended at least 0.5 meters from the EUT on all sides.

**8.3.5. TEST RESULTS**

Temperature:	25°C	Humidity	55% RH
Pressure	996mbar	Test result	Pass
Test mode	Working	Test By	Jack Chen

Air Discharge								
Test locations		Test Levels			Results			
		± 2 kV	± 4 kV	± 8 kV	Pass	Fail	Performance Criterion	Observation
Slots	8Points	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	B	Note <input type="checkbox"/> 1 <input checked="" type="checkbox"/> 2

Contact Discharge								
Test locations		Test Levels			Results			
		± 2 kV	± 4 kV	± 8 kV	Pass	Fail	Performance Criterion	Observation
HCP	4Points	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	B	Note <input type="checkbox"/> 1 <input checked="" type="checkbox"/> 2
VCP	4Points	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	B	Note <input type="checkbox"/> 1 <input checked="" type="checkbox"/> 2
Port	16Points	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	B	Note <input type="checkbox"/> 1 <input checked="" type="checkbox"/> 2
Metal	8Points	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	B	Note <input type="checkbox"/> 1 <input checked="" type="checkbox"/> 2

- NOTE:** 1. There was no change compared with initial operation during the test.
2. The loss of function of the EUT during the test and it was recovered by itself operation after the test.
3. N/A mean to no applicable.



8.4. ELECTRICAL FAST TRANSIENT (EFT)

8.4.1. TEST SPECIFICATION

Basic Standard:	EN 61000-4-4
Test Voltage:	Power Line: 1 kV Signal/Control Line: 0.5 kV
Polarity:	Positive & Negative
Impulse Frequency:	5 kHz
Impulse Wave-shape:	5/50 ns
Burst Duration:	15 ms
Burst Period:	300ms
Test Duration:	Not less than 1 min.
Performance criterion:	B

8.4.2. TEST INSTRUMENT

Immunity Shield Room				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Fast Transients/Burst Generator	EMC PARTNER	TRA2000	881	06/22/2016


NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

2. N.C.R.= No Calibration required

8.4.3. TEST PROCEDURE

- a) Both positive and negative polarity discharges were applied.
- b) The length of the “hot wire” from the coaxial output of the EFT generator to the terminals on the EUT should not exceed 1 meter.
- c) The duration time of each test sequential was 2 minute.
- d) The transient/burst waveform was in accordance with EN 61000-4-4, 5/50ns.

8.4.4. TEST SETUP

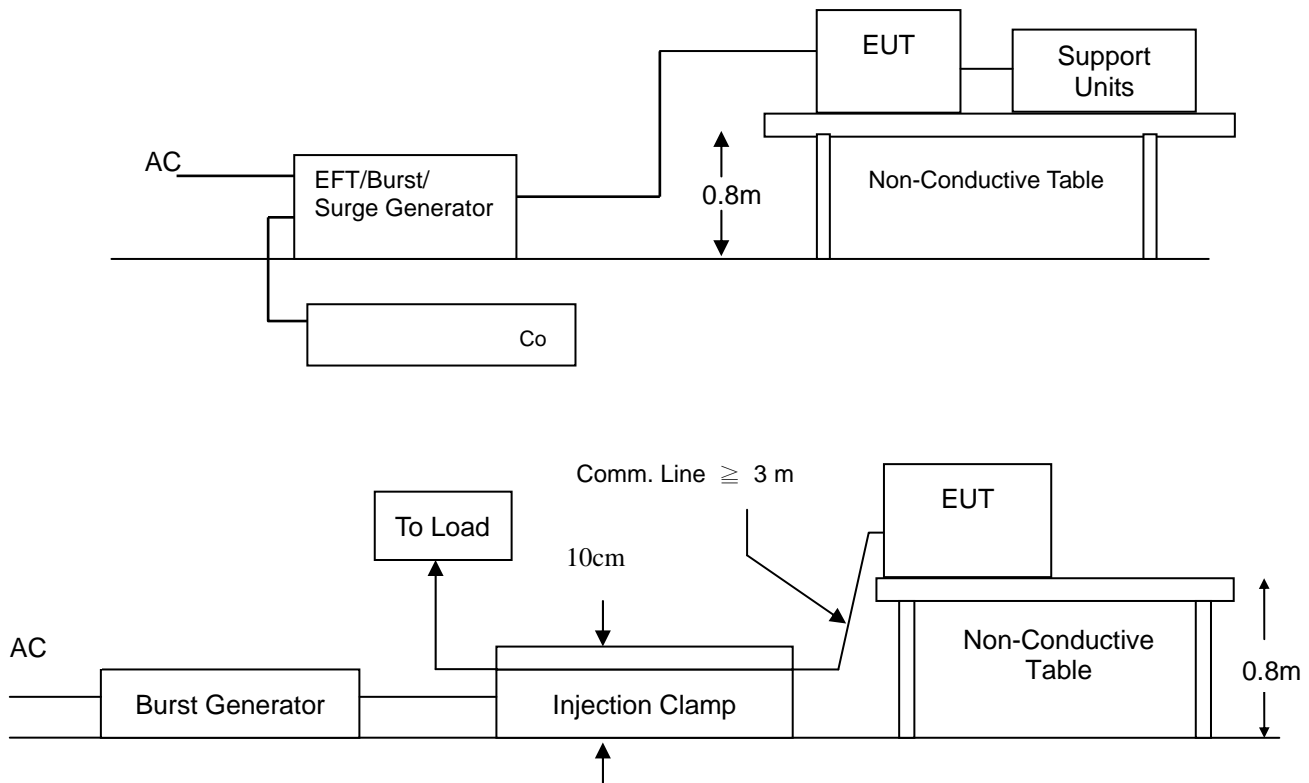

For the actual test configuration, please refer to the related item - Photographs of the Test Configuration.

NOTE:

TABLETOP EQUIPMENT

The configuration consisted of a wooden table (0.8m high) standing on the Ground Reference Plane. The GRP consisted of a sheet of aluminum (at least 0.25mm thick and 2.5m square) connected to the protective grounding system. A minimum distance of 0.5m was provided between the EUT and the walls of the laboratory or any other metallic structure.

FLOOR STANDING EQUIPMENT

The EUT installed in a representative system as described in section 7 of IEC 61000-4-4 and its cables, were isolated from the Ground Reference Plane by an insulating support that is 0.1-meter thick. The GRP consisted of a sheet of aluminum (at least 0.25mm thick and 2.5m square) connected to the protective grounding system.

**8.4.5. TEST RESULTS**

Temperature:	25°C	Humidity	55% RH
Pressure	996mbar	Test Result	Pass
Test mode:	Working	Test By	Jack Chen

Test Point	Polarity	Test Level (kV)	Performance Criterion	Observation	Result
L 1	+/-	1	<input type="checkbox"/> A <input checked="" type="checkbox"/> B	Note <input type="checkbox"/> 1 <input checked="" type="checkbox"/> 2	PASS
L 2	+/-	1	<input type="checkbox"/> A <input checked="" type="checkbox"/> B	Note <input type="checkbox"/> 1 <input checked="" type="checkbox"/> 2	PASS
L 1 – L 2	+/-	1	<input type="checkbox"/> A <input checked="" type="checkbox"/> B	Note <input type="checkbox"/> 1 <input checked="" type="checkbox"/> 2	PASS
PE	+/-	1	<input type="checkbox"/> A <input checked="" type="checkbox"/> B	Note <input type="checkbox"/> 1 <input checked="" type="checkbox"/> 2	PASS
L – PE	+/-	1	<input type="checkbox"/> A <input checked="" type="checkbox"/> B	Note <input type="checkbox"/> 1 <input checked="" type="checkbox"/> 2	PASS
N – PE	+/-	1	<input type="checkbox"/> A <input checked="" type="checkbox"/> B	Note <input type="checkbox"/> 1 <input checked="" type="checkbox"/> 2	PASS
L – N – PE	+/-	1	<input type="checkbox"/> A <input checked="" type="checkbox"/> B	Note <input type="checkbox"/> 1 <input checked="" type="checkbox"/> 2	PASS
RJ45 UTP cable	+/-		<input type="checkbox"/> A <input type="checkbox"/> B	Note <input type="checkbox"/> 1 <input type="checkbox"/> 2	N/A

- NOTE:** 1. There was no change compared with initial operation during the test.
2. The loss of function of the EUT during the test and it was recovered by itself operation after the test.



9. PHOTOGRAPHS OF THE TEST CONFIGURATION





