Steel DOT Cylinders

Steel DOT cylinders, manufactured in accordance with DOT specifications 4BA, 4BW, 4E. Pneumatic tested. Powder coat finish.

4.25 Lb. DOT Cylinders - Worthington

Part no.	Description	List Price
281149	With OPD & Type 1 connection*	$CALL
* Boxed cylinder also available.		

11 Lb. DOT Cylinders - Worthington

Part no.	Description	List Price
281166	11 Lb. With OPD & Type 1 connection*	$CALL
* Boxed cylinder also available.		

20 Lb. DOT Cylinders

Part no.	Description	List Price
Worthington		
281247	Vertical w/OPD & Type 1 connection	$CALL
296996	Horizontal, w/OPD & Type 1 connection	$CALL
308551	Vertical w/OPD & Type 1 connection w/Gauge	$CALL

30 Lb. DOT Cylinders

Part no.	Description	List Price
Worthington		
281277	Vertical w/OPD & Type 1 connection	$CALL
297003	Horizontal, w/OPD & Type 1 connection	$CALL
Manchester		
1166TC.2	Vertical w/OPD, Type 1 connection and gauge	$CALL
1175TC	Horizontal w/OPD, Type 1 connection and gauge	$CALL

40 Lb. DOT Cylinders

Part no.	Description	List Price
Worthington		
294366	Vertical w/OPD & Type 1 connection	$CALL
Manchester		
1222TC.2	40 lb. vertical w/OPD, Type 1 connection and gauge	$CALL

43.5 Lb. DOT Cylinders - Worthington

Part no.	Description	List Price
294240	43 lb. w/POL connection	$CALL

60 Lb. DOT Cylinders - Worthington

Part no.	Description	List Price
282449	W/collar, POL connection, outage	$CALL
1433	Screw cap	$CALL

100, 200 & 420 Lb. Cylinders - Worthington

Part no.	Description	List Price
282157	100# W/collar, POL connection, outage	$CALL
282168	100# W/collar, multivalve	$CALL
1433	Screw cap for 100#	$CALL
282209	200# DOT, w/multivalve connection	$CALL
294590	200# ASME w/service valve, relief, fill valve, gauge	$CALL
296214	420# DOT, w/POL connection, outage, fill, relief, gauge	$CALL
282371	420# ASME, w/POL connection, outage, fill, relief, gauge	$CALL

Compact Cylinder Valves with OPD

Compact Cylinder Valves with Overfill Prevention Device

Rochester OPD Valve with Gauge

Part no.	Description	List Price
OPD-20-GAUGE	OPD w/Gauge for 20# Cylinder	$CALL
OPD-30-GAUGE	OPD w/Gauge for 30# Cylinder	$CALL
OPD-DIAL	C-Level Dial only	$CALL

OPD Valve (without dial)

Part no.	Dip Tube Length	Use with DOT Cylinder up to	List Price
OPD425	3.1"	4.25 lbs.	$CALL
OPD20	4.0"	20 lbs.	$CALL
OPD30	4.7"	30 lbs.	$CALL
OPD40	6.4"	40 lbs.	$CALL

Prices subject to change without notice. Some items may not be in stock at all warehouses or may be special order. Please check with TEECO.

Order Online: www.teecoproducts.com
e-mail: info@teecoproducts.com

Sacramento, CA (800) 225-6621
Auburn, WA (800) 426-9456
Rapid City, SD (800) 843-8660

Quality Steel Tanks

Teeco Products is a representative for Quality Steel. We carry Quality Steel tanks, available for pickup at our locations, or for delivery to your location. Truckloads of tanks can also be delivered directly to you. Call us for your next load of tanks!

ASME Domestic Tanks

Aboveground LPG tanks conform to the latest edition and addenda of the ASME Code for Pressure Vessels, Section VIII Division I. Complies with NFPA 58 and is listed by Underwriters Laboratories, Inc. All tanks are pre-purged and ready to be filled.

Rated at 250 psig from -20° F. to 125° F. All tanks may be evacuated to 23" of vacuum.

Q-Kote™ high performance Epoxy primer / Urethane topcoat system maximizes corrosion resistance while providing ultra high durability for resistance to outdoor weathering.

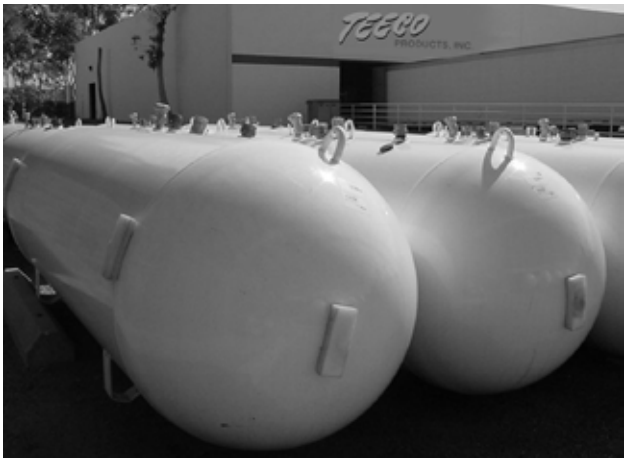

Part no.	Description	List Price
120AG	120 gallon domestic tank	$CALL
250AG	250 gallon domestic tank	$CALL
320AG	320 gallon domestic tank	$CALL
500AG	500 gallon domestic tank	$CALL
1000AG	1,000 gallon domestic tank	$CALL

ASME Underground Tanks

Underground LPG tanks conform to the latest edition and addenda of the ASME Code for Pressure Vessels, Section VIII Division I. Complies with NFPA 58. All tanks are pre-purged and ready to be filled. Rated at 250 psig from -20° F. to 125° F. All tanks may be evacuated to 23" of vacuum. Q-Thane™, a ready-to-bury* underground coating, is a high build, high performance epoxy primer with a polyurethane topcoat; uniquely formulated to maximize corrosion resistance and coating performance in underground applications. Liquid withdrawal opening located under the dome on all UG vessels.

Part no.	Description	List Price
120UG	120 gallon underground domestic tank	$CALL
250UG	250 gallon underground domestic tank	$CALL
320UG	320 gallon underground domestic tank	$CALL
500UG	500 gallon underground domestic tank	$CALL
1000UG	1,000 gallon underground domestic tank	$CALL

*Q-Thane™ is designed to offer optimum performance in underground conditions when buried with the coating skin 100% intact and with cathodic protection installed.

N2

Quality Steel Vertical Tanks

Smaller footprint than horizontal tanks. Ideal for installations where space is an issue, or for added exposure. May be purchased separately or included as part of a load of tanks.

Quality Steel Vertical Tanks can also be hooked up to your choice of Dispenser Package.

Part no.	Description	List Price
01059192SF	500 Gallon Vertical Tank	$CALL
01109092SF	1,000 Gallon Vertical Tank	$CALL

Prices subject to change without notice. Some items may not be in stock at all warehouses or may be special order. Please check with TEECO.

Order Online: www.teecoproducts.com
e-mail: info@teecoproducts.com

Sacramento, CA (800) 225-6621
Auburn, WA (800) 426-9456
Rapid City, SD (800) 843-8660

RSS - Remote Fuel Level Monitoring System

Eliminate out-of-gas calls and short-fills. Take the stress out of supplying LP-Gas to unpredictable usage, critical applications and geographically isolated customers. Improve productivity by having instant access to tank level information needed to plan bobtail routes more efficiently and to reliably service your customers.

Uses a solar powered transmitter, so the safety, maintenance and reliability issues associated with batteries are eliminated. Set customized notification levels for customers' tank level and/or temperature limits. Internet option is available, allowing real time monitoring.

Installation is simple. No field programming or tank draining required. RSS uses the backward compatible replacement Rochester Remote Ready dial. Transmitter is permanently installed on tank cover or pole mount and entire assembly is encapsulated for safety and environmental conditions. Extensive "real world" testing by independent propane companies throughout the US, and proven reliability in the most extreme conditions on top of Pikes Peak.

REC-1 Receiver

ITP-1 and SEN-1-24 Transmitter & Sensor Cable

Part no.	Description	List Price
RSSA	Complete Set for Above Ground Applications: Receiver, Transmitter and Sensor Cable. Battery Pack not included.	$CALL
RSSU	Complete Set for Underground Applications: Receiver, Transmitter and Sensor Cable. Battery Pack not included.	$CALL
RSSA-INTERNET	Complete Set for Above Ground Applications with Internet Connection	$CALL
RSSU-INTERNET	Complete Set for Underground Applications with Internet Connection	$CALL
REC-1*	Receiver / Modem Indoor unit	$CALL
RECINT-1*	Receiver with Modem and Internet, Indoor unit	$CALL
ITP-1	Integrated transmitter for propane	$CALL
SEN-1-24-RA**	Sensor Cable - 90° Angle for Above Ground or Underground applications	$CALL
TOOL	Tool kit with everything to minimize installation time. Recommended for volume installations.	$CALL
SPARE PARTS KIT	Spare parts kit to insure one stop installations.	$CALL
BATT	Battery pack for Aluminum Enclosure Transmitters. Supports a 6 second transmission necessary for RF tests.	$CALL
BATT-ITP-1	Battery pack for ITP-1 Transmitters (Recommended install tool)	$CALL
CABLE	9V battery power cable. For testing of the Receiver/Controller within a structure. (Recommended install tool)	$CALL
BC-1	Cable for linking prior model units to new transmitter	$CALL

Forklift Tanks - Worthington

Worthington Forklift Cylinders

Includes universal float gauge, liquid service valve, safety relief valve, fixed liquid level, plugged vapor and liquid fill ports.

Steel

Part no.	Description	List Price
281976	20 lb. steel forklift cylinder	$CALL
282070	33½ lb. steel forklift cylinder	$CALL
282092	43½ lb. steel forklift cylinder	$CALL

Aluminum

Part no.	Description	List Price
300112	33½ lb. aluminum forklift cylinder	$CALL
297303	43½ lb. aluminum forklift cylinder	$CALL

Buffer Tanks

Includes universal float gauge, vapor service valve, safety relief valve, fixed liquid level, plugged vapor and liquid fill ports.

Part no.	Description	List Price
281831	20 lb Aluminum Buffer Tank w/OPD	$CALL
301372	20 lb Steel Buffer Tank w/OPD	$CALL

Prices subject to change without notice. Some items may not be in stock at all warehouses or may be special order. Please check with TEECO.

Order Online: www.teecoproducts.com
e-mail: info@teecoproducts.com

Sacramento, CA (800) 225-6621
Auburn, WA (800) 426-9456
Rapid City, SD (800) 843-8660

Cathodic Protection for Underground Tanks - Anode Bags

Two commonly applied protection methods can be used; external coating and cathodic protection. These two methods are complementary, and should be used together. While an effective external coating can insulate more than 99% of the steel surface from the soil environment, no coating is perfect. Damage from construction or soil stresses creates tiny defects which can result in accelerated corrosion at the defect.

Cathodic protection prevents corrosion at the defects by applying DC current from an external source, such as a magnesium anode. This forces the tank to become a cathode, and corrosion of the tank is prevented. Application of sufficient DC current to the tank will prevent any corrosion from occurring. Due to its low current requirements, the preferred cathodic protection for an LP-Gas tank is a sacrificial anode system, generally consisting of a magnesium rod(s) attached to the tank with a copper wire and buried near the tank. This results in current flow from the anode to the tank and the resulting cathodic protection effectively stops the corrosive process from taking place.

Standard Application								
Part no.	Description	Anode Size / Bare Weight	Packaged Weight	Dimensions - Bare Anode		Dimensions - Packaged Anode		List price
				A	B	C	D	
17-AB	Magnesium Anode Bag 17 lb. H1 w/ wire	17 lbs.	45 lbs.	4"	18 ¾"	6 ½"	24"	$CALL



Coastal Application							
Part no.	Description	Anode Size/ Bare Weight	Width	Height	Length	Packaged weight	Price
18-ZAB	Zinc Anode Bag S-18 18 lb w/10' #12 TW wire	18 lbs.	1.4"	1.4"	36"	70 lbs.	$CALL

Cathodic Protection Testing Equipment and Electrodes

CPV-2 Analog

Measures DC structure-to-earth potentials of various buried or submerged metal structures. Powered by two "AA" penlight cells. Solid state integrated circuit has built-in filter to reject AC interference. May also be used without the reference electrode to measure direct current potentials from 0 to 2 volts, such as potentials across an insulated flange, anode to structure, or structure to structure.

N4

CPV-4 Digital

Measures DC structure-to-earth potentials of various buried or submerged metallic objects. Powered by an ordinary 9-volt battery, the Model CPV-4 gives an immediate reading in large 1/2 inch liquid crystal display numerals. The large scale integrated circuit has a built-in filter to reject AC interference. Digital readout eliminates interpolation of voltages. Small, lightweight. Die-cast metal case.

CPV-2

CPV-4

Part no.	Description	List Price
CPV-2	Voltmeter, complete with halfcell - Analog meter. Includes carrying case, a Copper-copper sulfate half cell electrode (model 6B) and two heavy-duty 6' coiled cables with clamps	$CALL
CPV-4	Voltmeter, complete with halfcell - Digital meter. Includes carrying case, a Copper-copper sulfate half cell electrode (model 6B) and two heavy-duty 6' coiled cables with clamps	$CALL
2A	Copper-copper sulfate half cell electrode - Pocket size	$CALL
6B	Copper-copper sulfate half cell electrode - Pointed tip	$CALL
8A	Copper-copper sulfate half cell electrode - Flat tip	$CALL

2A

6B

8A

How to Order Rochester Gauges

ASME Tanks

ASME horizontal cylindrical tanks for above-ground service.

1. Determine gauge head size and material. The following choices are available:
   a. Junior aluminum bolted head, 2 1/32“ bolt circle.
   b. Junior brass bolted head, 2 1/32” bolt circle.
   c. Senior aluminum bolted head, 2½” bolt circle.
   d. Senior brass bolted head, 2½” bolt circle.
   e. 1¼” NPTF threaded Junior zinc head
   f. 1¼” NPTF threaded Junior brass head
   g. 1” NPTF threaded Junior zinc head
   h. 1” NPTF threaded Junior brass head

ROCHESTER GAUGES, INC.



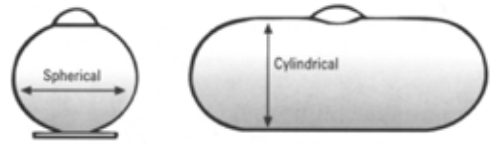

2. Specify tank diameter (on the tank nameplate, or measure the circumference of the tank, from which the diameter can be calculated.
3. Specify gauge mounting location:
   a. Top b. End or side at centerline c. Angle
4. If on the tank end, state head shape (hemispherical or semi-ellipsoidal)
5. If the gauge is angle mounted:
   a. Specify the degree of the angle from the horizontal centerline, or:
   b. Specify the distance in inches from the horizontal centerline vertically to the center of the gauge opening.
6. Specify the “H” dimension (riser height). This is the distance in inches from the top of the coupling or flange to the outside surface of the tank.

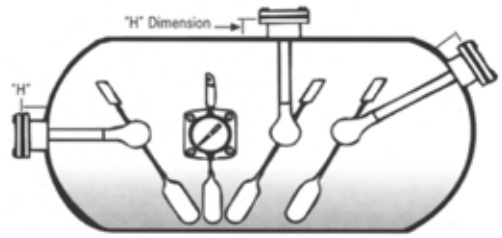

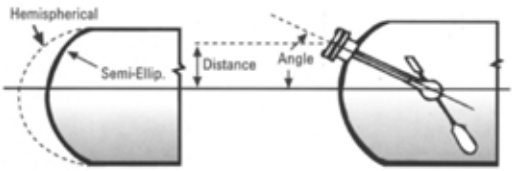

Replacement Gauges

Ordering duplicate or replacement gauges may be simplified by referring to the numbering code on the side of the gauge head. Example:

Model Number	Support Length	Tank Diameter	Mfg. Date
6284	6	24	D97

Vertical Cylinder Gauges

1. Determine gauge head size and material.
2. Specify tank diameter, or measure the circumference of the cylinder.
3. Specify the height of the cylinder (not including foot ring).
4. Specify the distance from the center of the gauge opening to the outside wall of the cylinder.
5. Specify the “H” dimension, the measurement from the highest point of the cylinder head to the top of the coupling or flange.
6. Specify tank capacity (200 lb., 300 lb., 420 lb.)
7. Furnish the name of the cylinder manufacturer.

N5

Applications

Series	Style	Domestic Tanks	Autogas Tanks	Lift Truck Cylinders	Bulk Storage Tanks	Transport & Bobtail Tanks	RV Tanks
6200 Series	Bolted						
7200 Series	Threaded						
7300 Series							
8900 Series							
6300 Series Magnetel	Welded Adapter						

Rochester Threaded Gauges

7300 Series 3/4" Magnetic Liquid Level Gauge

For use in DOT lift truck cylinders or domestic ASME tanks.
Head: Die-cast zinc (7300) or forged brass (B7300); Junior 3/4" male NPTF, 2" hex wrench flats. 13/8" hex wrench flats on thermoplastic gauge. Everseal thread coating available.
Dial: Junior snap-on or screw-on (horizontal, vertical, universal). Float: Aluminum one-piece, nitrile rubber on new 7384 thermoplastic polymer gauge.

DOT Forklift Cylinders				
Part no.	**Size (Lbs.)**	**Style**	**Diam-eter**	**List Price**
7384-1028	20, 33½, 43½	Horizontal	12"	$CALL
7384-1010	60, 100	Horizontal	14½"	$CALL
7381-1003	14	Vertical	9"	$CALL
7381-1002	20	Vertical	12"	$CALL
7384-1005	20	Universal	12"	$CALL
7384-1006	33½	Universal	12"	$CALL
7384-1007	43½	Universal	12"	$CALL
ASME Rotary Gauge Replacement				
Part no.	**Mount**		**Diam-eter**	**List Price**
7384-1030	End C/L		15"	$CALL
7384-1034	End C/L		24"	$CALL
7384-1035	End C/L		30"	$CALL
7384-1031	End C/L		36"	$CALL
7384-1032	End C/L		41"	$CALL
7384-1036	End C/L		48"	$CALL

8900/B8900 Series 1" Magnetic Liquid Level Gauge

Measures LP-Gas levels in domestic tanks, ASME Autogas tanks with 1" couplings and ASME RV tanks. These gauges can be top, side or angle mounted.
Head: Die-cast zinc (8900) or forged brass (B8900); 1" NPTF Junior, 2" or 13/8" hex wrench flats. Everseal thread coating available.
Dial: Available with choice of dial types; standard 5% to 95% direct-read dial #5323S01749, direct-read 5323S01789 screw-on or direct-read #5364S01951 snap-on. *TwinSite* transmitter also available.
Float: Aluminum, one piece.
NOTE: All ASME Autogas tank gauges are considered as a "special order" item. Please specify mounting (top, c/l, upper-45, lower-45) and whether standard or TwinSite sender/dial.

Part no.	Head	Mount	Dial	List Price
8981	Zinc	Top	Direct-read	$CALL
B8981	Brass	Top	Direct-read	$CALL
8944*	Zinc	Side, end, angle	Direct-read or TwinSite	$CALL
B8944*	Brass	Side, end, angle	Direct-read or TwinSite	$CALL
8941	Zinc	Top	TwinSite	$CALL

7200/B7200 Series 1¼" Magnetic Liquid Level Gauge

Direct-reading gauges for top, side or angle mounting on domestic tanks.

Head: Die-cast zinc(7200) or forged brass (B7200); 1¼" male NPTF threads and 2" hex wrench flats. *Everseal* thread coating available.

Dial: Standard direct-read percentage #5323S01749; *TwinSite* transmitter also available.

Float: Aluminum, one-piece.

Part no.	Head	Mount	Dial	List Price
7281	Zinc	Top	Direct-read	$CALL
B7281	Brass	Top	Direct-read	$CALL
7284	Zinc	Side, end, angle	Direct-read	$CALL
B7284	Brass	Side, end, angle	Direct-read	$CALL
7241	Zinc	Top	Direct-read or TwinSite	$CALL
7244	Zinc	Side, end, angle	Direct-read or TwinSite	$CALL
DOT Forklift Cylinders				
Part no.	**Size (Lbs.)**	**Style**	**Diameter**	**List Price**
7284-00024B	20, 33½, 43½	Horizontal	12"	$CALL
7281-45	20	Vertical	12"	$CALL
7281-49	43½	Vertical	12	$CALL
7284-120	20	Universal	12"	$CALL
7284-00034B	33½	Universal	12"	$CALL
7284-00035B	43½	Universal	12"	$CALL

Rochester Bolted Gauges

6200 Series Magnetic Liquid Level Gauge

Designed for use in domestic tanks, Autogas tanks, lift truck cylinders and RV tanks. Easily mounts in all ASME tanks with Junior or Senior adapters. Can be top, side or angle mounted for above ground or below ground tanks Head: Aluminum or forged brass Junior 4-bolt; aluminum sensor 4-bolt.
Dial: Standard direct-read dial #5323S01749. 4" dial or *TwinSite* transmitter also available. Gasket: Buna-N. Float: Aluminum, one-piece.

Part no.	Head	Mount	Dial	List Price
6281	Junior	Top	Direct-read	$CALL
6284	Junior	Side, end, angle	Direct-read	$CALL
6241	Junior	Top	TwinSite	$CALL
6244	Junior	Side, end, angle	TwinSite	$CALL
B6244	Junior (Brass)	Side, end, angle	TwinSite	$CALL
6280	Senior	Top	Direct-read	$CALL
6283	Senior	Side, end, angle	Direct-read	$CALL
6240	Senior	Top	TwinSite	$CALL
6243	Senior	Side, end, angle	TwinSite	$CALL
6290	Senior	Top	4"	$CALL
6293	Senior	Side, end, angle	4"	$CALL

DOT Forklift Cylinders

DOT Forklift Cylinders				
Part no.	**Size (Lbs.)**	**Style**	**Diameter**	**List Price**
6284-24	20, 33½, 43½	Horizontal	12"	$CALL
6284-45	60, 100	Horizontal	14½"	$CALL
6281-45	20	Vertical	12"	$CALL
6281-48	33½	Vertical	12"	$CALL
6281-49	43½	Vertical	12"	$CALL
6281-50	60	Vertical	14½"	$CALL
6281-47	100	Vertical	14½"	$CALL
6284-32	14	Universal	9"	$CALL
6284-33	20	Universal	12"	$CALL
6284-34	33½	Universal	12"	$CALL
6284-35	43½	Universal	12"	$CALL
ASME Forklift Tanks				
Part no.	**Size (Gallons)**	**Diameter**	**List Price**	
6281-4 1/2-10	7.5	10"	$CALL	
6281-5 1/2-10	10	12"	$CALL	

TwinSite

TwinSite Remote Monitoring

TwinSite EZ-Read senders, with high-tech, polycarbonated dial chambers, are directly attached to the head of Junior or Senior liquid-level gauges.
The transmitters not only give a direct reading, but also send an electrical signal to remote receivers. Unobstructed direct-reading view, with improved accuracy and reliability. May only be used with intrinsically safe circuits.

Part no.	Description	List Price
5628S02537P	Junior sender, 0-90 ohms, Advanced Matrix film	$CALL
5630S02538P	Junior sender, 70-10 ohm	$CALL
5644S02545P	Junior sender, 0-30 ohm	$CALL

Domestic Tank Monitoring System

Part no.	Description	List Price
5-1925	TwinSite switch, Junior, 30% Low, E-F fractional	$CALL

Rochester Magnetel Gauges

6300 Series Magnetel Liquid Level Gauge

Liquid level gauges accurately determine the percentage of tank volume for most liquids in stationary bulk storage applications.
Head: Stainless steel.
Dial: Standard direct-read 4” and 8”.
Gasket: Spiral-wound, Teflon filled, stainless steel.
Float: Stainless steel.

Part no.	Description	List Price
**6336-†	4”, top mounting	$CALL
**6339-†	4”, side, end or angle mounting	$CALL
**6360-†	8”, top mounting	$CALL
**6342-†	8”, side, end or angle mounting	$CALL
** Specify prefix; Dia: P - propane, 5-95%, A - NH_3, 5-95%, C - combination LPG/NH_3 Mounting: X - Straddle, Y - 2” opening, M - Special mobile, V - Vertical† Specify Mounting Flange Trim: -8 Aluminum, -11 stainless steel (-11 should be used on containers of 3500 WG).		

M6300 Series Magnetel Rough Rider Liquid Level Gauge

Designed to stand the vibration and shock inherent in tank in transport and bobtail mobile service.
Head: Stainless steel.
Dial: Standard direct-read 4” & 8”.
Gasket: Spiral-wound, teflon-filled, stainless steel.
Float: Stainless steel.

Part no.	Description	List Price
CM6339-11-**	4” dial, mobile LPG tanks up to 90” in diameter	$CALL
** Specify tank diameter		

N8

Magnetel Ordering Information

1. Liquid product and specific gravity.
2. Type vessel, inside diameter (in inches) and head type (ellipsoidal, semi elliptical, hemispherical).
3. Prefix.
4. Part no. for mounting location (top, side, 8 “ or 4” dial).
5. Trim number.
6. Bolt hole location of mounting flange (centerline or straddle).
7. If other than standard percent of total volume dial is required.
8. Top-mounted gauges require dimension from mounting flange face to tank shell plus shell thickness.
9. Angle-mounted gauges require tank drawings for computing proper gauge dimensions.

Magnetel Mounting Flange

Tank mounting flanges are not included with Magnetel gauges and should be ordered separately. Note: Flanges welded to tank with top and bottom bolt holes on the vertical centerline are standard with Rochester gauges.

When the flange is attached so that the bolt holes span the centerline (see drawing) add the prefix “X” to the Magnetel gauge model number.

Example: X6342-8

Part no.	Description	List Price
22-29	2-1/2" NPT threaded neck flange	$CALL
22-30	Forged steel welded flange	$CALL
22-500	3" weld neck	$CALL

Stud bolts (56-404) and nuts (44-403) are furnished with each Magnetel gauge. Cap screws (40-9) can be furnished on request.

Magnetel Weather Guard

Part no.	Description	List Price
23S-1	Weather cover, 8”	$CALL
23S-2	Weather guard, 4”	$CALL
23S-8	Weather guard, 8”	$CALL

Magnetel Parts

Part no.	Description	List Price
5-477	Dial, 4", 3% - 97%, all liquids	$CALL
5-478	Dial, 4", 3-97%, LPG	$CALL
5137S03047	Dial, 4" Magnetel, 5-95%	$CALL
5-481	Dial, 8", 3-97%	$CALL
15-11	Gasket, mounting flange, Buna-N	$CALL
15-451	Gasket, under 4" crystal	$CALL
0093-00403	Mounting bracket, for 8" dial chamber	$CALL

Parts

About R_3D Remote Ready Dial :

The Rochester Remote Ready Dial, R_3D, is a magnetically-driven, Hall Effect compatible dial. Used on stationary applications where direct reading plus an electrical signal to a remote fuel level monitor may be required. Models are available to fit all Rochester Junior, Senior and Snap-On liquid-level gauges. Rochester's Hall Effect Module is designed to snap-fit into the recess in the Remote Ready Dial lens. Once installed, the module can provide radiometric voltage output proportional to the liquid volume inside the tank.

Dials

Part no.	Description	Reading	List Price
5986S02733	R3D Dial, Senior, ASME aboveground	5%- 95%	$CALL
5987S02787	Dial, Taylor type "A" R3D w/dust cap	5% - 95%	$CALL
5-554	Dial, Senior 4" gauge, NH3	5% - 95%	$CALL
5909S02733	R3D Dial, Junior, ASME aboveground	5% - 95%	$CALL
5909S02799	R3D Dial, Junior, ASME underground	5% - 95%	$CALL
5909S02772	R3D Dial, Junior, Vertical DOT	10%-82%	$CALL
5323S02321	Dial, Junior, ASME, f/ 7384-1030, 7384-1031, 7384-1032	12% - 80%	$CALL
5323S02323	Dial, Junior, ASME, f/ 7384-1034, 7384-1035, 7384-1036	Fractional	$CALL
5-1848	Dial, Junior, NH3	5% - 95%	$CALL
Forklift Dials			
5-7	Dial, Junior, horizontal	Fractional	$CALL
5-1919	Dial, Junior, 20 lb. vertical	Fractional	$CALL
5-414	Dial, Junior, 33½ lb. universal	Fractional	$CALL
5-1992	Dial, Junior, 33½ lb. universal	Fractional	$CALL
5-1993	Dial, Junior, 43½ lb. universal	%	$CALL
5-2558	Dial, Junior snap-on, 20 lb. vertical	%	$CALL
5-2445-BOLT	Dial, Junior bolt-on, 20 & 33½ lb. universal	Fractional	$CALL
5-2445-SNAP-ON	Dial, Junior snap-on, 20 & 33½ lb. universal	Fractional	$CALL
5323S02320	Dial, Junior snap-on, 43½, 60, 100 lb. horizontal	Fractional	$CALL

R_3D

R_3D Remote Ready 4" Dial for RoughRider™ Bobtail and Transport Gauges

Part no.	Description	Reading	List Price
5ANTS03047	4" Dial, R3D Ready	5% - 95%	$CALL
5APKS03045	4" Dial, R3D Ready, Fluorescent	5% - 95%	$CALL

R_3D Remote Ready 8" Dial for Magnetel™ Storage Tank Gauges

The R3D 8" dial lens features an integral socket that accepts the R3D Hall Effect Module, which is featured in the industry's leading RF Remote Monitor manufacturers.

Part no.	Description	Reading	List Price
5ANGS03044	8" Dial, R3D Ready, Centerline	3% - 97%	$CALL
5ANLS03044	8" Dial, R3D Ready, Straddle	3% - 97%	$CALL

Universal Dial Kit

For old, obsolete Junior or Senior gauges. Fits any LPG float gauge ever built.

Part no.	Description	List Price
31-80	Dial kit, Senior	$CALL
31-81	Dial kit, Junior	$CALL

Miscellaneous Parts

Part no.	Description	List Price
40-21	Dial screw, Junior or Senior	$CALL
40-413	Dial screw, 4" gauge and flow indicator	$CALL
40-414	Gauge head screw, Junior	$CALL
40-415	Gauge head screw, Senior	$CALL
15-4	Gauge gasket, Buna N, Senior	$CALL
15-7	Gauge gasket, Buna N, Junior	$CALL
15-21	O-ring, Buna N, Junior	$CALL
15-22	O-ring, Buna N, Senior	$CALL
39-2	Aluminum bezel Ring, 4" gauge and flow indicator	$CALL
93-02	Bracket, Senior w/4" dial	$CALL
6018S00000	Float bulb w/sleeve, for 6200 series.	$CALL

Prices subject to change without notice. Some items may not be in stock at all warehouses or may be special order. Please check with TEECO.

Order Online: www.teecoproducts.com
e-mail: info@teecoproducts.com

Sacramento, CA (800) 225-6621
Auburn, WA (800) 426-9456
Rapid City, SD (800) 843-8660

Accessories

Flow Indicator

Indicates direction of flow of compatible liquids in pipelines at working pressures up to 500 psig. Must be installed in pipeline tees. Direct read dial. Made of forged steel and 300 series stainless steel.

Part no.	Description	List Price
6286-00325	Flow indicator with 3 1/4" vane	$CALL
6286-00475	Flow indicator with 4 3/4" vane	$CALL
6286-00525	Flow indicator with 5 1/4" vane	$CALL
6286-00550	Flow indicator with 5 1/2" vane	$CALL

Bimetallic Thermometers

Commonly used on storage tanks, bobtails and transports. Made of 304 stainless steel. For use only with thermowells. -90°F to 130°F. ½" MNPTF.

Part no.	Description	List Price
1750-4	4" stem length	$CALL
1750-6	6" stem length	$CALL
1750-9	9" stem length	$CALL
1750-12	12" stem length	$CALL

Tank Car Thermometer

Range -30° to +120°. Thermometer and case are available separately or combined.

Part no.	Description	List Price
610	Tank car thermometer and armor case	$CALL
610-11	Thermometer only	$CALL

Tools

Float Gauge Drill Guide

The Float Gauge Drill Guide is a precision tool, designed to accurately guide a drill bit through the center of a broken float gauge screw.

Part no.	Description	List Price
JR-DG	Junior Drill Guide	$CALL
SR-DG	Senior Drill Guide	$CALL

Prices subject to change without notice. Some items may not be in stock at all warehouses or may be special order. Please check with TEECO.

Order Online: www.teecoproducts.com
e-mail: info@teecoproducts.com

Sacramento, CA (800) 225-6621
Auburn, WA (800) 426-9456
Rapid City, SD (800) 843-8660