

Hardwired Electric Garage Heater



OWNERS MANUAL

Read and save these instructions.



A Name You Can Trust

Trust has to be earned, and we will earn yours. Customer happiness is the focus of our business.

From the factory to the warehouse, from the sales floor to your home, the whole NewAir family promises to provide you with innovative products, exceptional service, and support when you need it the most.

Count on NewAir.

As a proud NewAir owner, welcome to our family. There are no robots here; real people shipped your product and real people are here to help you.

Thank you for your purchase and remember NewAir is A Name You Can Trust.

Call us today at 855-963-9247

Or email support@newair.com

For future reference, we recommend you attach a copy of your sales receipt here and record the following information. You will need this information if it becomes necessary to contact the manufacturer for service inquiries.

Date of Purchase: _____

Serial Number: _____

Model Number: _____



Connect with us online.

<http://www.NewAir.com>

READ AND SAVE THESE INSTRUCTIONS.

TABLE OF CONTENTS

Important Instructions	4
Safety Information & Warnings.....	5
Heater Installation.....	6
Operation INSTRUCTION	9
Cleaning & Storage	10
Specifications.....	11
Troubleshooting	12
Limited Manufacturer's Warranty	13

IMPORTANT INSTRUCTIONS

PLEASE READ ALL INSTRUCTIONS BEFORE USING THIS HEATER

- This heater is hot when in use. To avoid burns, do not let bare skin touch the hot surface. Always use the handle when moving this heater. The trim around the air outlet grille becomes hot during heater operation.
- CAUTION – High temperature; risk of fire. Keep combustible materials such as furniture, pillows, bedding, papers, clothes, and curtains at least 3 feet (0.9 m) from the front of the heater and keep them away from the sides and rear.
- Extreme caution is necessary when any heater is used by or near children or invalids, and whenever the heater is left operating and unattended.
- Do not install less than 6 feet (1.9 m) from the floor and closer than 1.64 feet (0.5m) to any adjacent vertical surfaces or walls.
- Do not operate the heater if the supplied wire is damaged, the heater malfunctions, or the heater has been dropped or damaged in any manner. Disconnect power at service panel and return heater to authorized service facility for examination, electrical or mechanical adjustment, or repair.
- Do not use the heater outdoors.
- This heater is not intended for use in bathrooms, laundry areas and similar humid indoor locations. Never put a heater where it may fall into a bathtub or other water container.
- To disconnect heater, turn off power to heater circuit at main disconnect panel.
- Connect to properly grounded outlets only. Check heater voltage and amperage on the back of the heater to make sure it is compatible with the electric service supplied.
- Do not insert or allow foreign objects to enter any ventilation or exhaust opening, as this may cause an electric shock or fire, or damage to the heater.
- To prevent a possible fire, do not block air intakes or exhaust in any manner. Do not use on soft surfaces, like a bed, where openings may become blocked.
- All electrical heaters have hot, arcing, or sparking parts inside. Do not use in areas where gasoline, paint, or flammable liquids are used or stored, or where the unit will be exposed to flammable vapors.
- Do not modify the heater. Use it only as described in this manual. Any other use not recommended by the manufacturer may cause fire, electric shock, or injury to persons.
- Always use a certified electrician should new circuits or outlets be required.
- Disconnect all power before performing any cleaning, maintenance, or relocation of the unit.
- When transporting or storing the unit, keep in a dry place free from excessive vibration, and store so as to avoid damage.
- Make sure that no pieces of polystyrene or other packaging material have been left between one element of the appliance and another. It may be necessary to clean the appliance with a vacuum cleaner.
- Do not run in locations where the heater will be left unattended for long periods of time.
- Do not use attachments or filters. They are not recommended.
- Use this heater only as described in this manual. Any other use not recommended by the manufacturer may cause fire, electric shock or injury to persons.



SAVE THESE INSTRUCTIONS

Note: There may be a trace of smoke or odor when this unit is first operated. Don't be alarmed. This indicates that a drop of oil fell on the heating coil during the manufacturing process. It will quickly evaporate and should not re-occur.

Make sure that the room in which the appliance is located is well ventilated during its operation. It is normal for the appliance to emit small cracking sounds when you turn it on for the first time. Do not be alarmed.

WARNING – RISK OF FIRE.DO NOT USE AS A RESIDENTIAL OR HOUSEHOLD HEATER.

CAUTION: This appliance is not intended for use by persons (including children) with reduced physical, sensory, or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.

SAFETY INFORMATION & WARNINGS



When using any electrical appliance, basic safety precautions must be followed in order to reduce the risk of fire, electrical shock and/or injury to persons or property. Be sure to read all instructions before using this appliance and observe the following safety tips:


HEATER INSTALLATION

! NOTE: To prevent personal injury always use a licensed electrician to install new outlets or circuits.

HEATER LOCATION AND CLEARANCES

The heater must be installed in a fixed location. The discharge air should wipe the walls without blowing directly on them (Figure 1).


Ensure that air discharge is parallel to or away from walls.

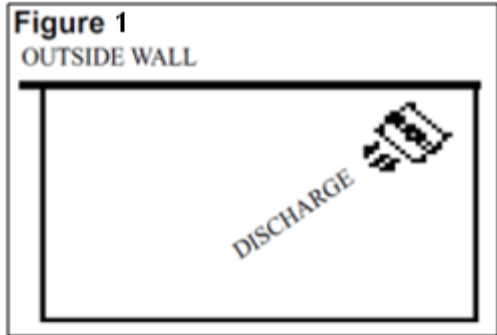

INSTALLATION OF WALL/CEILING HANGER BRACKET

The hanger bracket allows the unit to be rotated approximately 45 degrees in each direction from center, when attached to a wall while suspended from a wall or ceiling.

NOTE: The hardware for mounting the hanger bracket to the wall or ceiling is not included.

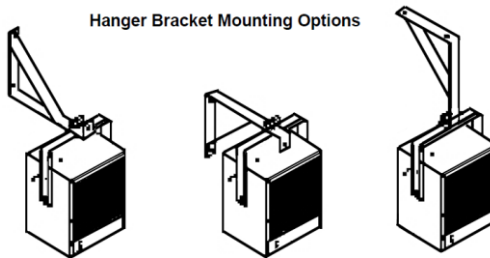


! CAUTION: When turning and/or tilting the heater do not block the exhaust opening.

The following steps are shown in Figure 2:

1. Locate a stud or other suitable support and install hanger bracket on wall or ceiling. Select a location where the control knob on the back of the heater is easily reachable.
2. Insert carriage bolt into square opening of heater handle.
3. Slide spacer over the carriage bolt shaft and insert the hanger bracket opening and hold them in position.
4. Slide lock washer and thread nut onto carriage bolt. Turn and tighten with wrench.

Figure 2

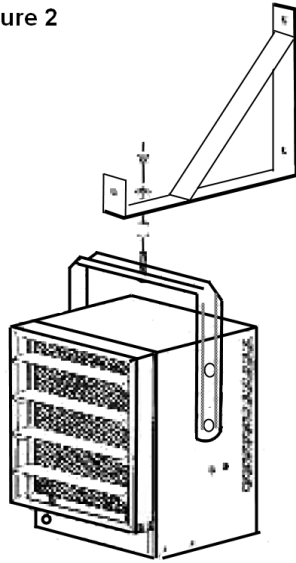

Do not install less than 6 feet (1.9 m) from the floor.


ELECTRICAL CONNECTION



WARNING: Consult local electrical codes in addition to the following requirements:

1. Turn off main power supply at the electrical panel.
2. Route supply wires from circuit breaker to an approved junction box, located near compact unit heater. These supply wires must be two conductor non-metallic sheath cable with ground wire. Each heater should be on an individual, properly fused circuit.
3. Route supply wires from junction box to G73. These supply wires must be two conductor metallic sheath (BX) cable with ground wire. Alternatively, appropriate conduit can be used.
4. Remove junction box cover of G73 and remove one knockout hole. Insert approved bushing into hole and feed wire cable through. Tighten bushing around cable.
5. Make electrical connection to G73 according to relevant wire diagram. Make connections using approved wire nut connectors and secure the grounding wire to the ground screw on the heater chassis.
6. Replace junction box cover of G73.
7. To reduce the risk of fire, do not store or use gasoline or other flammable vapors and liquids in the vicinity of the heater.


Figure 3

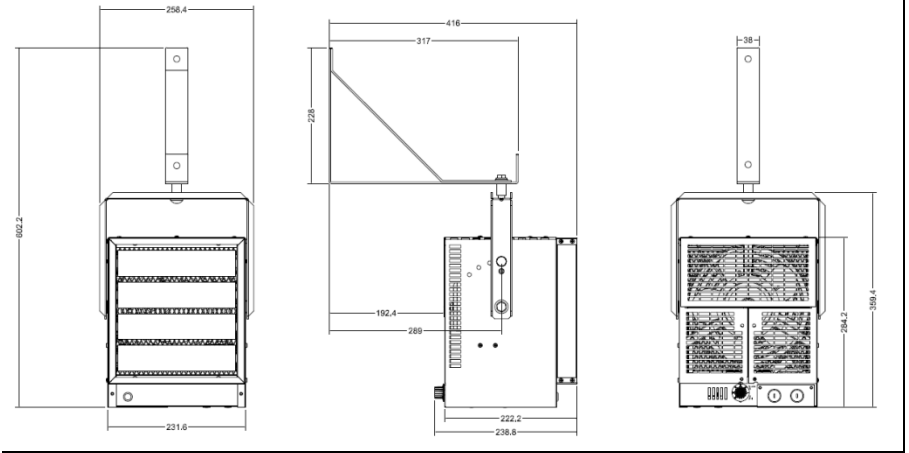

OPERATION INSTRUCTION

SETTING THE THERMOSTAT

1. Before connecting or disconnecting plug, turn knob fully counterclockwise (Figure 4).
2. Heater is equipped with a thermostat. To adjust temperature to your individual requirements, turn thermostat control knob clockwise all the way to turn heater on.

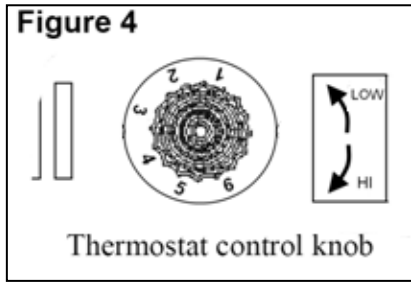

3. When room reaches desired temperature, turn thermostat knob counterclockwise until you hear a “click”. Leave in this position to maintain room temperature at this setting.
4. For additional heat, turn clockwise until you hear “click” again and heater will turn on.
5. To turn heater to the lowest setting, turn the thermostat knob counterclockwise all the way.

CLEANING & STORAGE

REGULAR CLEANING:

Before any cleaning:

- Make sure the heater is turned off.
- Disconnect power supply at source.



CAUTION: Allow at least 30 minutes for the heater to cool before attempting any maintenance or cleaning.

1. Do not spray cleaning liquid or other chemicals onto the unit.
2. Interior dust can often be removed by using a vacuum cleaner with a crevice tool attachment.
3. To clean housing, use a clean, soft and lightly damp cloth to gently wipe all the dirt from the surface of the unit. Be sure not to wet the heating element and the switches. Allow the unit to dry completely before using it.

Caution: Do not allow water to run into the interior of the heater as this could create a fire or electric shock hazard, damaging the unit.

STORAGE

1. Perform the cleaning procedures described above.
2. Wipe all parts dry.
3. Pack the heater in a plastic bag and store it in a cool, dry place.

SPECIFICATIONS

MODEL NO.	G73
VOLTAGE:	240 volts
FREQUENCY:	60 Hz
POWER CONSUMPTION:	5000W

TROUBLESHOOTING

Problem	Possible Causes	Solution
Unit is not heating.	Overheat protection has temporarily deactivated the heater.	Turn the heater off; disconnect the power and allow it to cool. Inspect and remove any objects on or adjacent to the heater. Wait 30 minutes before restoring power.
	Room temperature has been warmed up to thermostat setting.	To increase the room temperature, adjust thermostat control knob to a higher setting by turning clockwise.
	Heater is not wired correctly.	Follow the included hardwiring directions. Contacting a licensed electrician is recommended.
	Breaker/Fuse has been tripped.	Check your electrical box to confirm the breaker has not been blown. This may occur if the receptacle is shared between other high consumption appliances.
The heater is producing a burning smell.	A drop of oil fell on the heating coil during the manufacturing process. It will quickly evaporate and should not occur again.	Ensure room in which heater is situated is well ventilated.
	Check and ensure there are no combustible materials within 0.9 meters (3 ft.) surrounding the heater.	Remove any combustible items from the heater.
	Ensure a minimum clearance of 1.64 feet (0.5m) from both sides and rear of heater to adjacent walls.	Reposition the heater so there is enough space around the heater to the adjacent walls.

**Please do not attempt to open or repair the heater yourself.
Doing so could cause damage or personal injury.**

LIMITED MANUFACTURER'S WARRANTY

This appliance is covered by a limited manufacturer's warranty. For one year from the original date of purchase, the manufacturer will repair or replace any parts of this appliance that prove to be defective in materials and workmanship, provided the appliance has been used under normal operating conditions as intended by the manufacturer.

Warranty Terms:

During the first year, any components of this appliance found to be defective due to materials or workmanship will be repaired or replaced, at the manufacturer's discretion, at no charge to the original purchaser. The purchaser will be responsible for any removal or transportation costs.

Warranty Exclusions:

The warranty will not apply if damage is caused by any of the following:

- Power failure
- Damage in transit or when moving the appliance
- Improper power supply such as low voltage, defective household wiring or inadequate fuses
- Accident, alteration, misuse or abuse of the appliance such as using non-approved accessories, inadequate air circulation in the room or abnormal operating conditions (extreme temperatures)
- Use in commercial or industrial applications
- Fire, water damage, theft, war, riot, hostility or acts of God such as hurricanes, floods, etc.
- Use of force or damage caused by external influences
- Partially or completely dismantled appliances
- Excess wear and tear by the user

Obtaining Service:

When making a warranty claim, please have the original bill of purchase with purchase date available. Once confirmed that your appliance is eligible for warranty service, all repairs will be performed by a NewAir™ authorized repair facility. The purchaser will be responsible for any removal or transportation costs. Replacement parts and/or units will be new, re-manufactured or refurbished and is subject to the manufacturer's discretion. For technical support and warranty service, please email support@newairusa.com.