

Regular Installation Instructions

*Notes: Different car model have different car seats, but the structure is similar, you can compare this manual and according to your actual seat to install seat covers. You can find out how to disassemble your seat on Youtube.

*More installation and information video , please visit our [Youtube channel-LingyueAuto-Coverpartz](#).

*IMPORTANT INFORMATION: **The airbag flap on the seat covers must be closest to the door on the outside of the seat**


*There have front seat covers , rear seat covers ,headrest covers in the package , all covers split according to the car seat ,please check and separate them

FRONT ROW INSTALLATION:

Step 1 : Find the covers for front seats , **the airbag flap on the seat covers must be closest to the door on the outside of the seat**, so you can distinguish between drive's side covers and passenger's side covers



Step 2: Slide the seat backward and press the tab to release the headrest, Secure the headrest cover,repeat steps for rear seat (choose the right covers ,cuz usual the shape of front headrest is different with the rear headrest)

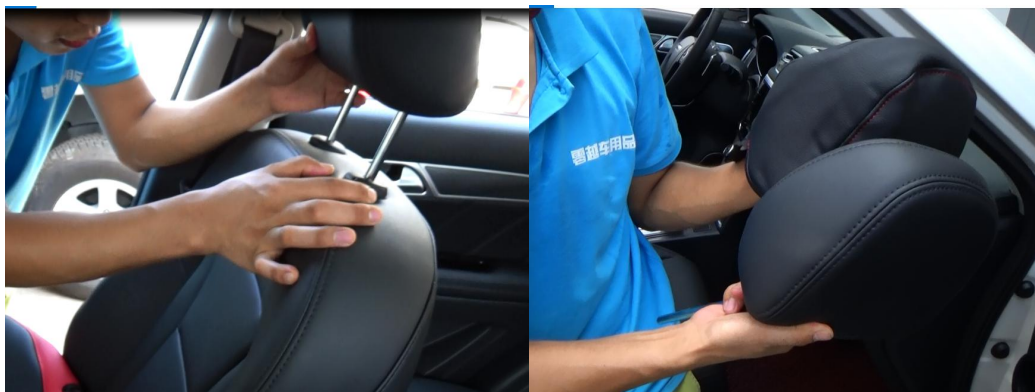



Step 3: Slide the cover over the front seat ,push the fabric under the trim




Place the cover onto the seat back and prepare the straps and clips ,
using the tool pass the clips between the seat back and bottom, place
and adjust the seat covers



Pull the straps and clips behind the seat ,hold the top of front seat cover
by straps , velcro etc.



Step 4: Slide cover over seat bottom, pull the straps and clips behind the seat

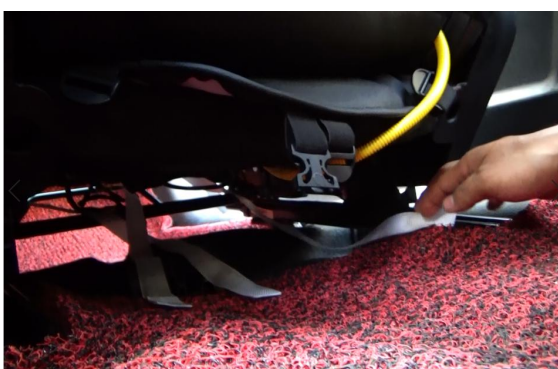

Push fabric behind trim using tool



* REPEAT STEPS FOR PASSENGER SEAT

REAR ROW INSTALLATION:

Step 1: Remove the cover bar in the cargo area if you have

Step 2: Slide on the headrest cover like the front headrest covers

Step 3: Unzip the seat cover zipper, slide the top cover over the back seat, push fabric over the trim, match the edges of the seat cover then zip up the zipper, tuck in the fabric between the seat top and bottom and pull it up behind the seat, secure the velcro to the fabric





Step 4: If the bottom can be removed ,release the bottom and place the seat onto the cover then secure the clips ,then install the seat
if the bottom cant be removed ,please check step 5






Step 5: Slide cover over the seat bottom ,match the edges of the seat
cover the seat ,tuck in fabric between the seat



adjust the material



secure straps under seat

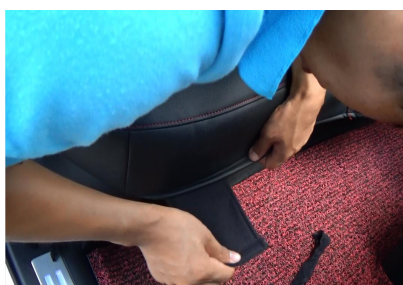

Step 6: Secure the safety belt buckle to its elastic holder

