

PYLE[®]
PyleAudio.com

Model: **PRJG65**

PYLE[®]
PyleAudio.com

Pyle Audio
1600 63rd.Street
Brooklyn N.Y. 11204



ATTENTION

1. Please read this manual carefully before using it.
2. To ensure stable power supply, please use good supply line and outlet with grounding.
3. Please use the power supply indicated on the projector and the wire provided with the projector.
4. Please do not dismantle the projector without authorization; otherwise the supplier bears no responsibility for maintenance service.
5. Do not look into the lens while the projector is on working to prevent eyes from hurting.
6. Do not place the projector on the articles which may become obstacles for ventilation.
7. This projector has no waterproof function; you need to keep it away from water. And vessels with water should not be placed around it.
8. To avoid electric shock, please keep the projector from rain and dampness.
9. Please shut off the projector and unplug the adapter if the projector will not be used for a long time.
10. When the projector is transported, please use the plastic foam and other anti-shock materials provided with the projector.
11. If the projector is found to be damaged, please do not try to repair by yourself and please contact the distributor.

*** This manual is for reference only. If you have any question, please contact the distributor.

T Able of contents

1、Production files

◆ Product Features	1
◆ Specification	2
◆ Fittings	2

2、User Guide

◆ Connection	3
◆ Function operation	5
◆ Menu use guide	6
◆ Remote Control	11

3、Fault removal12

1. Product Profiles

1.1 Product Features

- 1 All sealed & high efficient cooling design, enhance product stability and life time.
- 2 Using of the 30 thousand hours long life RBG-LED lamp, which makes it more colorful and abundant details.
- 3 Electronics zooming function and free image size setting.
- 4 Professional trouble shooting and protection design.
- 5 Optical keystone function, picture proportion is not distortion after adjustment.
- 6 Mode shift freely.
- 7 Super low noise and dust-free design, free you from internal cleaning.
- 8 Image rolling function support upwards and downwards installing
- 9 Power consumption lower to 30W.
- 10 Multi input interface:AV,VGA,USB, SD, HDMI vehicle power supported
- 11 Mini USB slot, could connect with power bank (note:must be 2A power bank).

1.2 Specification

Model NO.	Mini Projector	Image System	TFT LCD
Input terminal	AV、VGA、USB、SD、HDMI、Micro USB	Support Resolution	1920*1080
Lamp	LED	Voltage input	12V-2.5A/5V-2A
Menu Language	English, Chinese, etc. (23 languages)	Brightness	150LUMEN
Contrast	500:1	Lens	F=125
Projection size	30-120 inches	Projection Distance	1.07-3.31meters
Color	16770K	Power consumption	30W
Speaker	2 x (8Ω2W)	Weight	0.68KG
Size	285X180X115MM	Operation model	Manual & Remote control
Working Temp.	-10℃ – 28℃	Max. supported SD card memory	32G
System	Multimedia (Andriod OS: optional)	Keystone	±15° hand adjustment




1.3 Fittings

Please check if the fitting is complete before you buy this projector:

Remote control	1	User Manual	1
Power adapter	1	warranty card	1
3 in 1 AV cable	1		

2. USER GUIDE

2.1 Connection

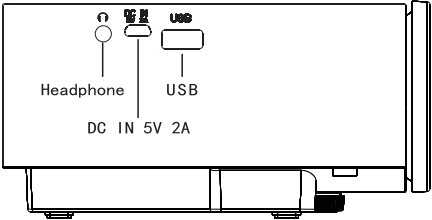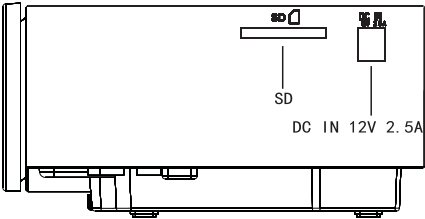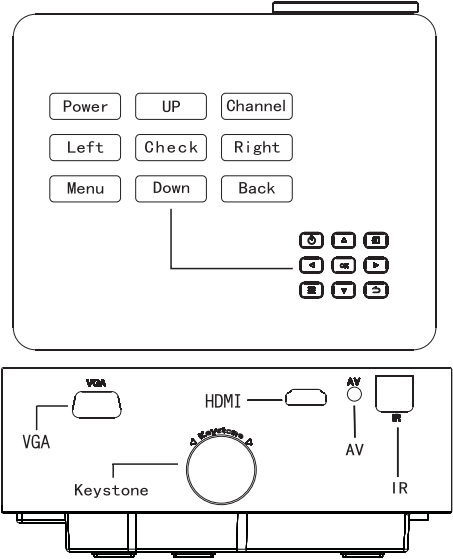

2.2 Function operation

2.2.1 Switch-on and off

After powering through the power adaptor, then projector is under standby status.

Switch on: Press the power button or the power button on the remote control once, and then the projector is powered on.

Switch off: When you want to shut the projector, please press the power button beside the indicate light or the power button on the remote control once, and then the projector is off.

Image focus


Place the projector vertical to the projection screen, and then rotate the lens slightly, until the brilliant image presented.

Attention:

Please connect the power adapter with the projector first, then plug the socket into the outlet. Finally power on the projector..

2.3 Menu use guide

A. Signal channel choose



press the source button in the remote control, then use “▲” or “▼” button to choose the different signal channel, press OK button to confirm

1. Connect laptop

Before connecting laptop, please confirm your laptop if have VGA card drive, then adjust your laptop to be copied model, pc no need to adjust, use VGA cable connect is ok



VGA cable connect with projector and the computer




Press projector or remote control input button, get the signal out, choose computer channel

2. HDMI connect HD device or mobile

(1) use HDMI cable connect projector with computer or laptop




(2) MHL cable connect with mobile

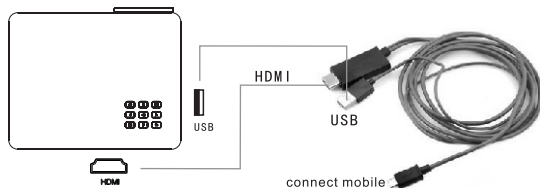

press projector or remote control input button, get the signal, then choose HDMI channel

3. AV slot connect

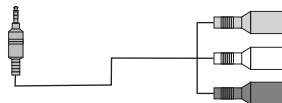


connect the device with AV slot



Press projector or remote control input button, get the signal, then choose Video channel

4. USB SD connection

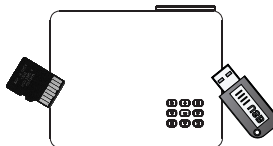

Put the USB or SD card insert corresponding slot, then choose corresponding channel in the signal

B. Menu image



press the menu button in the remote control come to menu, choose the left “◀/▶” choose the right “▲/▼” Press OK button come to adjustment menu

C. Upgrade software

Software upgrade procedures:

Insert the flash drive which with firmwell software, open and come to projector , press input button, come to signal source choose USB channel, press “◀” ok button, come to USB channel, then press MENU button , press

D. Projector image reverse

1.Press remote control MENU button come to menu, choose the left _right reverse in the image button,press OK button confirm




2. Left _right reverse, then press “▼” button then you could find the up&down reverse button, press OK button conform.

E. Language shift


Use remote control MENU button come to menu, find the menu language in the setup, choose language

c.USB menu

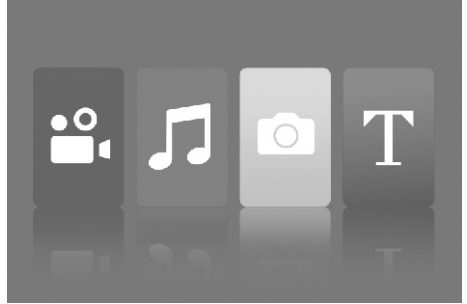

After you choose Media signal source, the interface change to the above picture, and then you can play correspondent files through "photo", "music", "movie", "text" icon by the projector accordingly..

2.4 Remote control

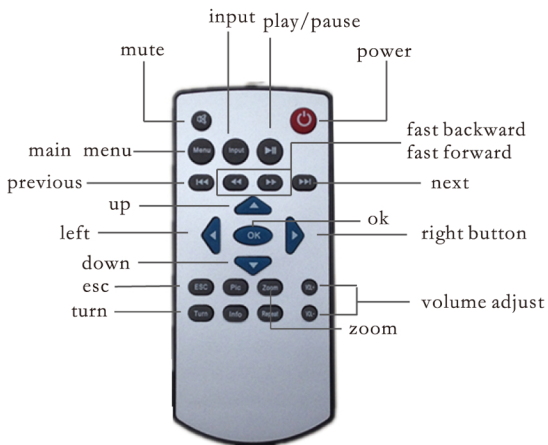

Don't use the new and old battery at the same time in remote control, otherwise power shortage and will affect remote control use. please pick the battery out if no use for long time. when operating remote control, please make sure that the signal emission of the remote control aims the infrared receiving interface of projector.

3. FAULT REMOVAL

as your projector occurred the following situation, please make a check and deal with it .

Fault	check
Out of power/can't open the projector	Please check if the power adaptor connect ok, if put the remote control battery
No image and sound	Please check the signal input connection if ok, check the signal source if workable
have sound no image	Please check the signal if connect right, check the brightness, contract ration if was adjusted to be the lowest
Have image no sound	Please check the input slot if connect right, the sound if was adjusted to be lowest
Image is dim	Check the lens if zoom right, the project distance if too far, check the signal if workable
Color dim	Check the color and color temperature of ok
Close automatically	Take off the power supply , and restart it