



FEATURES

- Aluminum body, acrylic prismatic lens
- Adjustable canopy height
- Aluminum finish
- 2837 Lumens
- 70 Watts
- 120 Volts
- 3000 Kelvin temperature
- Evershine driver
- SMD2835 Epistar chip
- Full dimming on standard dimmer switches (0.01% - 100%)
- Easy Installation
- Limited Lifetime Warranty

TECHNOLOGIES


- **Continuu** - Preserves the integrity of the LED system by responding to the needs of the diodes throughout their lifetime, including: ambient
- **Noptics** - prismatic lenses create a 120° spread of even, full-bodied light.
- **PearlPURE** - Produces brilliant, full-bodied white light with high color rendering so colors within the room are lit accurately and vibrantly.

APPLICABLE CERTIFICATIONS

Q: What does a "ETL certified" product mean?



A: Intertek (ETL) is a nationally recognized, independent product safety certification organization. The ETL Mark is proof of product compliance to North American safety standards. Authorities Having Jurisdiction and code officials across the US and Canada accept the ETL Listed Mark as proof of product compliance to published industry standards.

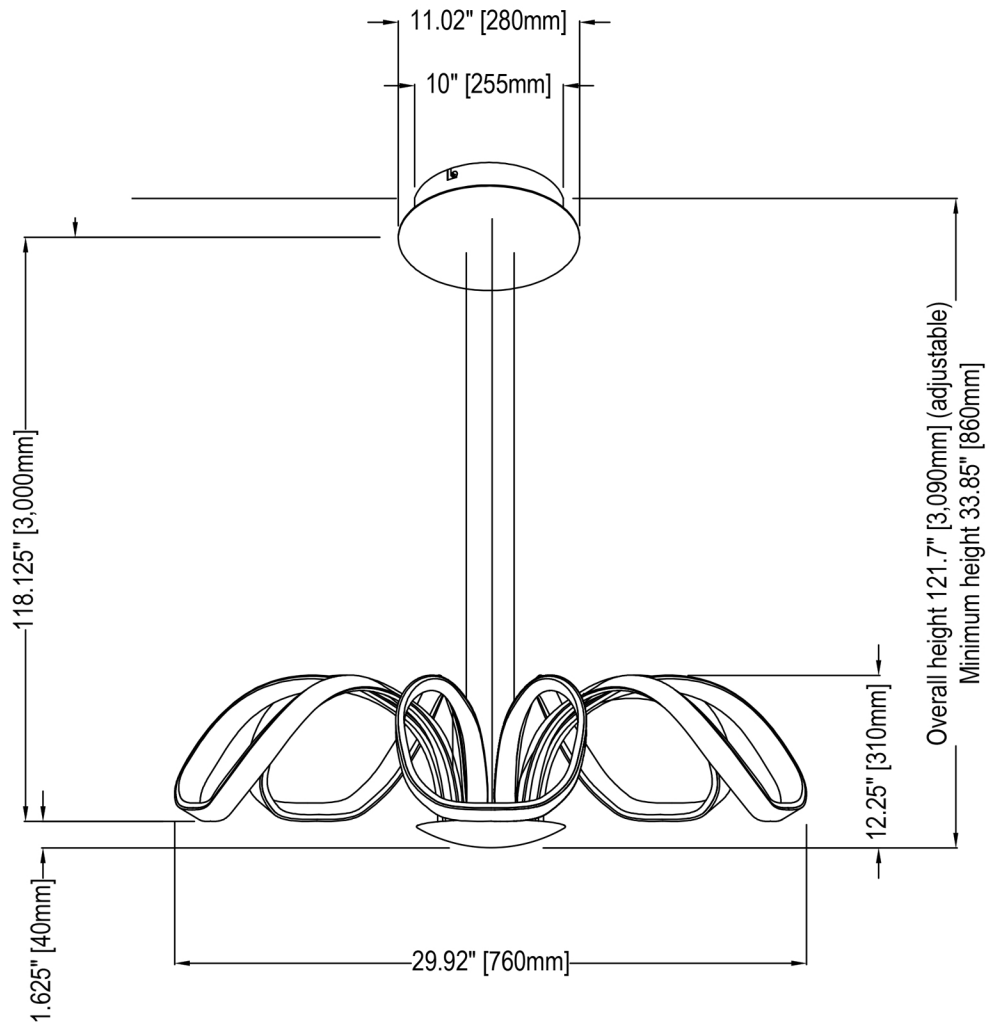

AVAILABLE FINISH



Brushed
Aluminium



Black