

CAMPING & OUTDOOR

MOBILE LIVING MADE EASY.



↗ DOMETIC



DOMETIC THE CAMPING AND OUTDOOR EXPERTS

CONTENTS

Dometic Waeco CFX compressor fridge/freezers	3 - 8
Dometic Waeco CoolFreeze compact compressor fridge/freezers	9 - 11
Dometic Cool Ice iceboxes	12
Dometic Waeco Bordbar thermoelectric coolers	13
Dometic Waeco CoolPro thermoelectric coolers	14 - 15
Dometic 3-way absorption coolers	16 - 17
Dometic Waeco accessories - protective covers, fixing kits, fridge slides, displays, fridge stand	18 - 21
Dometic Kitchen solutions	22 - 23
Dometic Sanitation solutions	24 - 25
Dometic Mobile energy solutions	26 - 27
MILENCO Caravan products	28 - 29
Dometic CoolPower Battery Solutions	30
Dometic Box awnings	31







DOMETIC WAECO CFX 95DZW

Dual compartment compressor fridge & freezer

It's the biggest Waeco CFX ever released featuring dual lids and independently controlled compartments which can run in any combination as fridges or freezers. It is also the first WiFi enabled CFX with an app to monitor and control temperatures on the move.

Packed full of all the great features you have come to expect from the CFX range, plus 22 mm wide multi-air pocket gaskets on the reversible lids for optimised energy efficiency and performance at high ambient temperatures.

See page 8 for more details

-  12/24 V DC + 100 – 240 V AC
-  Ideal for solar operation
-  85 L storage volume (94.5 L gross volume)
-  USB charging outlet
-  Refrigeration & deep-freezing up to -22 °C
-  Controlled via WiFi app



Configuration	54 L Compartment	40.5 L Compartment
1	Fridge	Freezer
2	Freezer	Fridge
3	Fridge	Fridge
4	Freezer	Freezer
5	Either compartment can be OFF whilst other in operation	

CFX FRIDGE/FREEZER MONITORING APP

Monitor and control your fridge whilst on the move.

This app is exclusive to the CFX fridge/freezer range* and is available to download on your Android or iOS phone or tablet.

WiFi ENABLED APP FEATURES

- WiFi enabled smart phone app
- Download for iOS via the App Store or for Android via Google Play. Simply search 'CFX' (only one device can be connected)
- Set & monitor the temperature of your fridge/freezer
- Temperature alarm function
- Set or review your preferred battery protection level
- Lid open alert
- Displays supply voltage type (AC or DC)
- Displays DC voltage level
- Displays Low voltage alarm
- Full details & FAQ's can be found via dometic.com

*Excluding CFX 28, CFX 65DZ





WAECO CFX FRIDGE/FREEZER THE NEXT GENERATION PORTABLE FRIDGE

RUGGED FEATURES, INNOVATIVE DESIGN AND EXTREMELY POWERFUL & EFFICIENT COOLING

The Waeco CFX fridge/freezer range is the result of many years of research and product development. We have taken your feedback into account to develop a fridge that is tough enough to endure the harshest Australian environments. We know if it will perform there, it will perform anywhere and in any situation.

Waeco CFX provides extreme cooling performance and energy efficiency. All seven models have optimised internal capacities, combined with substantial insulation thickness all round - lid, sides and bottom. They are equipped with rugged features like strong latches, hinges, drop down handles, and innovative technology such as the new genuine Waeco compressor and upgraded VMSSO (Variable Motor Speed Optimisation).

Whether you use it for 4WD driving, camping or fishing for a day trip or an extended holiday exploring this vast country - with Waeco CFX, you can go anywhere!

DOMETIC WAECO CFX

Compressor fridge/freezer for refrigeration or deep-freezing with CFX VMSO2 electronics

Class leading Waeco CFX System

- Fully hermetic WAECO compressors with integrated control electronics
- Low voltage protection adjustable for leisure and starter battery via electronic system
- Electronic fuse/automatic reverse pole protection
- Dynamically ventilated condenser
- Aluminium rollbond evaporator

Unbeatable range of quality features

- WiFi enabled
- Detachable lid
- Interior light
- CFX VMSO2 electronics with soft start and turbo cooler
- USB port
- Dimmable display
- 4 point M6 nutserts in base



Energy efficient genuine Waeco compressors with integrated AC electronics

The genuine WAECO compressors are the result of significant R&D investment, designed with input from Dometic WAECO engineers in order to fulfil performance requirements based on the Australian climate, usage and road conditions. The WAECO electronics via VMSO2 are matched to support the extreme (-22 °C) capability and also contribute to the power efficiency of the WAECO CFX.

VMSO Mk2 Variable Motor Speed Optimisation provides fast and efficient cooling or freezing

The unique VMSO Mk2 technology in the CFX range ensures optimal compressor speed according to the set temperature. Building on VMSO first deployed in the CF range, the upgraded VMSO Mk2 provides an even softer start for the compressor. It now takes the compressor turbo speed to higher RPM than before until set temperature is reached, after which the speed drops back to economy mode. For very cold freezer set temperatures, the compressor remains at turbo speed after the soft start. This technology is extremely effective in all weather conditions, especially when hot. Benefits include even faster and more energy efficient cooling with reduced wear and tear on the compressor.


- Suitable for vehicle with single battery
- Variable motor speed optimisation MK2
- Up to 50 °C below ambient temperature
- 3 stage battery protection
- USB charging outlet

DOMETIC WAECO CFX 28
Compressor fridge or freezer

DOMETIC WAECO CFX 35W
Compressor fridge or freezer



+ additional 2 year (parts only) compressor




Gross capacity	28.2 L	34.5 L
Voltage	12/24 V DC and 100 – 240 V AC	12/24 V DC and 100 – 240 V AC
Power input (AC 230 V)	Approx. 54 W (@ 230 V AC, 5 °C interior, 32 °C ambient)	Approx. 54 W (@ 230 V AC, 5 °C interior, 32 °C ambient)
USB charging outlet	5 V / 500 mA rating	5 V / 500 mA rating
Power consumption (DC 12 V)	Average current draw x running time. Average 0.75 Ah/h (@12 V, 5 °C interior, 32 °C ambient temperature)	Average current draw x running time. Average 0.77 Ah/h (@12 V, 5 °C interior, 32 °C ambient temperature)
Temperature range	+10 °C to -22 °C (capable of -22 °C, minimum setting of -18 °C recommended for normal usage)	+10 °C to -22 °C (Although capable of -22 °C, minimum setting of -18 °C recommended for normal usage)
Insulation	CFC-free PU foam, substantial thickness on lid, bottom & sides	CFC-free PU foam, substantial thickness on lid, bottom & sides
System	Fully hermetic Waeco AMV13JZ compressor with integrated control electronics, low voltage protection adjustable for leisure and starter battery via electronic system, electronic fuse/automatic reverse pole protection, dynamically ventilated fin/tube condenser, aluminium rollbond evaporator	Fully hermetic Waeco ACV20DC compressor with integrated control electronics, low voltage protection adjustable for leisure and starter battery via electronic system, electronic fuse/automatic reverse pole protection, dynamically ventilated wire tube condenser, aluminium rollbond evaporator
Material	Cabinet & lid: polypropylene, Handle ends: glass filled nylon, Handle rod: powder coated steel, Hinges: die cast stainless steel. All screws are stainless steel	Cabinet & lid: Polypropylene, Handle ends: Glass filled nylon, Handle rod: powder coated steel, Hinges: Die cast stainless steel. All screws are stainless steel
Colour	Body: pale grey/light grey; lid: light grey	Body: pale grey/light grey; lid: light grey
Weight	13.1 kg	17.5 kg
Dimensions (W x H x D)	342 x 425 x 620 mm	398 x 411 x 692 mm
Quality features	Detachable lid, interior light. CFX VMSO2 electronics with soft start and turbo cooler, USB port, dimmable display, 4 point M6 nutserts in base	Detachable lid, interior light. CFX VMSO2 electronics with soft start and turbo cooler, USB port, dimmable display, 4 point M6 nutserts in base, WiFi enabled
Scope of delivery	DC and AC connection cables, removable wire basket, spring-loaded carrying handles	DC and AC connection cables, removable wire basket, spring-loaded carrying handles
Product	DOMETIC WAECO CFX 28	DOMETIC WAECO CFX 35W
Ref. No	9105306503	9105306495


See page 12 for Waeco's range of accessories



+ additional 2 year (parts only) compressor

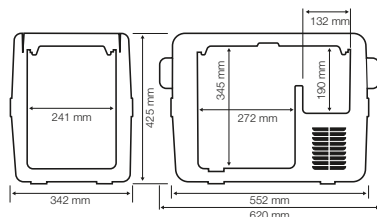

- | Holds 43 cans
- | Fits standard Champagne bottle upright

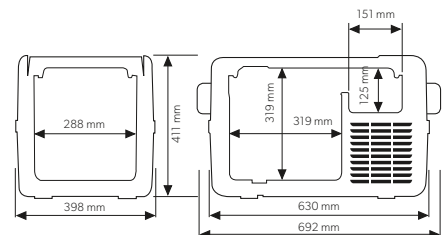

- | Holds 47 cans
- | Fits standard Champagne bottle upright



Dimmable display



Genuine WAECO compressor with integrated AC electronics



Suitable for solar operation



12/24 V DC and 240 V AC


DOMETIC WAECO CFX 40W
Compressor fridge or freezer

DOMETIC WAECO CFX 50W
Compressor fridge or freezer


DOMETIC WAECO CFX 65W
Compressor fridge or freezer




41 L	50 L	65 L
12/24 V DC and 100 – 240 V AC	12/24 V DC and 100 – 240 V AC	12/24 V DC and 100 – 240 V AC
Approx. 56 W (@ 230 V AC, 5 °C interior, 32 °C ambient)	Approx. 60 W (@ 230 V AC, 5 °C interior, 32 °C ambient)	Approx. 65 W (@ 230 V AC, 5 °C interior, 32 °C ambient)
5 V / 500 mA rating	5 V / 500 mA rating	5 V / 500 mA rating
Average current draw x running time. Average 0.74 Ah/h (@12 V, 5 °C interior, 32 °C ambient temperature)	Average current draw x running time. Average 0.77 Ah/h (@12 V, 5 °C interior, 32 °C ambient temperature)	Average current draw x running time. Average 0.85 Ah/h (@12 V, 5 °C interior, 32 °C ambient temperature)
+10 °C to -22 °C (Although capable of -22 °C, minimum setting of -18 °C recommended for normal usage)	+10 °C to -22 °C (Although capable of -22 °C, minimum setting of -18 °C recommended for normal usage)	+10 °C to -22 °C (Although capable of -22 °C, minimum setting of -18 °C recommended for normal usage)
CFC-free PU foam, substantial thickness on lid, bottom & sides	CFC-free PU foam, substantial thickness on lid, bottom & sides	CFC-free PU foam, substantial thickness on lid, bottom & sides
Fully hermetic WAECO ACV20DC compressor with integrated control electronics, low voltage protection adjustable for leisure and starter battery via electronic system, electronic fuse/automatic reverse pole protection, dynamically ventilated wire tube condenser, aluminium rollbond evaporator	Fully hermetic WAECO ACV20DC compressor with integrated control electronics, low voltage protection adjustable for leisure and starter battery via electronic system, electronic fuse/automatic reverse pole protection, dynamically ventilated wire tube condenser, aluminium rollbond evaporator	Fully hermetic WAECO ACV20DC compressor with integrated control electronics, low voltage protection adjustable for leisure and starter battery via electronic system, electronic fuse/automatic reverse pole protection, dynamically ventilated wire tube condenser, aluminium rollbond evaporator
Cabinet & lid: Polypropylene, Handle ends: Glass filled nylon, Handle rod: powder coated steel, Hinges: Die cast stainless steel. All screws are stainless steel	Cabinet & lid: Polypropylene, Handle ends: Glass filled nylon, Handle rod: powder coated steel, Hinges: Die cast stainless steel. All screws are stainless steel	Cabinet & lid: Polypropylene, Handle ends: Glass filled nylon, Handle rod: powder coated steel, Hinges: Die cast stainless steel. All screws are stainless steel
Body: pale grey/light grey; lid: light grey	Body: pale grey/light grey; lid: light grey	Body: pale grey/light grey; lid: light grey
18.5 kg	20.4 kg	22.3 kg
398 x 461 x 692 mm	725 x 471 x 455 mm	725 x 561 x 455 mm
Detachable lid, interior light. CFX VMSO2 electronics with soft start and turbo cooler, USB port, dimmable display, 4 point M6 nutserts in base, WiFi enabled	Detachable lid, interior light. CFX VMSO2 electronics with soft start and turbo cooler, USB port, dimmable display, 4 point M6 nutserts in base, WiFi enabled	Detachable lid, interior light. CFX VMSO2 electronics with soft start and turbo cooler, USB port, dimmable display, 4 point M6 nutserts in base, WiFi enabled
DC and AC connection cables, removable wire basket, spring-loaded carrying handles	DC and AC connection cables, removable wire basket, spring-loaded carrying handles	DC and AC connection cables, removable wire basket, spring-loaded carrying handles
DOMETIC WAECO CFX 40W	DOMETIC WAECO CFX 50W	DOMETIC WAECO CFX 65W
9105306496	9105306497	9105306498

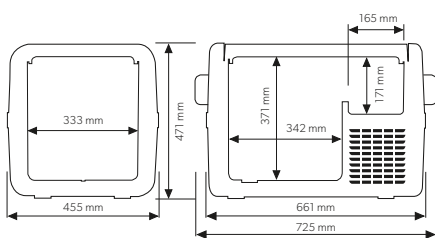

- ▮ Holds 60 cans
- ▮ Fits standard Riesling bottle upright

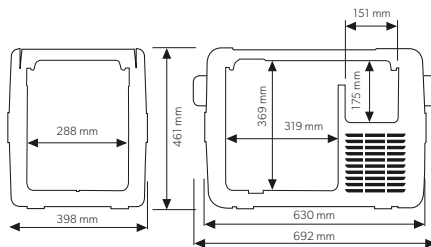

- ▮ Holds 72 cans
- ▮ Fits standard Riesling bottle upright

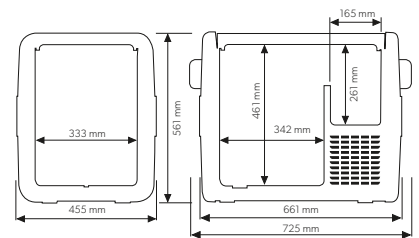


- ▮ Holds 106 cans
- ▮ Fits standard Riesling bottle upright


- 💡 Suitable for vehicle with single battery
- ⚙️ Variable motor speed optimisation MK2
- ❄️ Up to 50 °C below ambient temperature
- 🔋 3 stage battery protection
- 🔌 USB charging outlet

DOMETIC WAECO CFX 65DZ
Dual zone compressor fridge and freezer

DOMETIC WAECO CFX 95DZW
Dual compartment compressor fridge and freezer









 + additional 2 year (parts only) compressor




 WiFi enabled




Gross capacity	61 L TOTAL - Fridge: 42 L, Freezer: 19 L	94.5 L (54/40.5 L compartments)
Voltage	12/24 V DC and 100 – 240 V AC	12/24 V DC and 100 – 240 V AC
Power input (AC 230 V)	Approx. 50 W (@ 230 V AC, 5 °C interior, 32 °C ambient)	Approx. 70 W (@ 230 V AC, +3 °C/-15 °C large/small compartments, 32 °C ambient)
USB charging outlet	5 V / 500 mA rating	5 V / 500 mA rating
Power consumption (DC 12 V)	Average current draw x running time. Average 1.9 Ah/h (@12 V, -15 °C freezer, 32 °C ambient temperature)	Average current draw x running time. Average 3.6 Ah/h (@12 V +3 °C/-15 °C large/small compartments, 32 °C ambient temperature)
Temperature range	+10 °C to -22 °C (although capable of -22 °C, minimum setting of -18 °C recommended for normal usage)	+10 °C to -22 °C in both compartments (temps below -18 °C not recommended for normal use. -18 °C achievable both compartments simultaneously up to 32°C ambient)
Insulation	CFC-free PU foam, substantial thickness on lid, bottom & sides	CFC-free PU foam, substantial thickness on lid, bottom & sides
System	Fully hermetic Waeco ACV20DC compressor with integrated control electronics, low voltage protection adjustable for leisure and starter battery via electronic system, electronic fuse/automatic reverse pole protection, dynamically ventilated wire tube condenser, aluminium rollbond evaporator	Fully hermetic Waeco ACV25DC compressor, 2 x aluminum rollbond evaporators with independent control electronics & displays, 3-level low voltage protection, electronic fuse/automatic reverse polarity protection, dynamically vented fin/tube condenser
Material	Cabinet & lid: polypropylene, Handle ends: glass filled nylon, Handle rod: powder coated steel, Hinges: die cast stainless steel. All screws are stainless steel	Lids: polypropylene, Cabinet: ABS & painted zinc steel, Handle ends: glass filled nylon, Handle rod: powder coated steel, Hinges: die cast stainless steel. All screws are stainless steel
Colour	Body: pale grey/dark grey; lid: light grey	Body: Dark grey sides with light grey top highlight, Lids: light grey
Weight	23.2 kg	32 kg
Dimensions (W x H x D)	725 x 561 x 455 mm	957 x 472 x 530 mm
Quality features	Detachable lid, interior light. CFX VM502 electronics with soft start and turbo cooler, USB port, dimmable display, 4 point M6 nutserts in base	Detachable & reversible lids, interior lights with lid open alarm, USB port, dimmable display, 4 point M6 nutserts in base, WiFi enabled
Scope of delivery	DC and AC connection cables, removable wire basket, spring-loaded carrying handles	DC and AC connection cables, 3 removable wire baskets, spring-loaded carrying handles
Product	DOMETIC WAECO CFX 65DZ	DOMETIC WAECO CFX 95DZW
Ref. No	9105306499	9105306502


-  Genuine Waeco compressor with integrated AC electronics
-  Variable Motor Speed Optimisation MK2
-  Suitable for solar operation
-  Up to 50 °C below ambient temperature
-  12/24 V DC and 240 V AC
-  Suitable for vehicle with single battery
-  3 stage battery protection
-  USB charging outlet

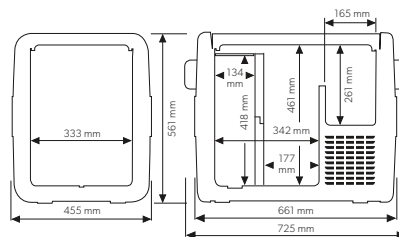

- | Holds 60 cans
- | Fits standard Riesling bottle upright

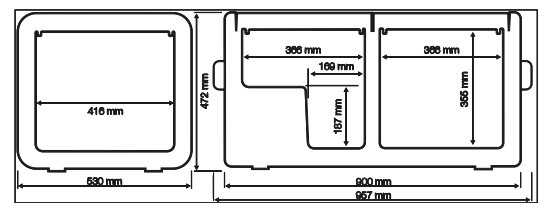

- | Holds 133 cans (81/52 cans in 54/40.5L compartments)
- | Fits standard Riesling bottle upright

 + additional 2 year (parts only) compressor



DOMETIC WAECO COOLFREEZE CDF/CF PORTABLE COMPRESSOR FRIDGE/FREEZER

The Dometic Waeco CoolFreeze range are entry level compressor fridge/freezers designed to get the job done by delivering excellent cooling or freezing performance.


POWERFUL & DURABLE Even at extreme temperatures

The Dometic Waeco CoolFreeze range is designed for Australian conditions, delivering high performance cooling or freezing in areas with fluctuating temperatures.

- Lockable digital thermostatic control "Set & Forget" - Smart electronics do the work for you (excludes CF 18)
- Built-in battery protection - No flat batteries
- No dual battery required - Suitable for vehicles with a single battery (suitable wiring required)
- Built-in 240 V - No external adapter needed (excludes CDF 11 & CF 18)
- VMSO (Variable Motor Speed Optimisation) - Faster cooling / Efficiently maintains the temperature / Less wear and tear (applicable to CF 40 & CF 50 only)
- Flush mounted evaporator plate - Easy to clean
- Interior LED light - Shuts off when the lid is closed (excludes CF 18)
- Reinforced wire basket with divider - Easy to stack and protects the evaporator plate (excludes CDF 11 & CF 18)

COMPRESSOR TECHNOLOGY

Compressor cooling appliances work with a CFC-free refrigerant that changes from liquid to gas as it flows through the evaporator. During this process, the evaporator extracts heat from the refrigeration compartment – it's getting cold. The compressor draws in the gaseous refrigerant, compresses it and passes it on to the condenser. Here, the absorbed heat is released to the atmosphere. The refrigerant changes to the original liquid state and flows back to the evaporator, where the cycle starts again.




**DOMETIC WAECO
COOLFREEZE CDF 11**
Portable compressor fridge or freezer


**DOMETIC WAECO
COOLFREEZE CF 18**
Portable compressor fridge or freezer



Gross capacity	10.5 L	18 L
Voltage	12/24 V DC	12/24 V DC
Power input (AC 230 V)	N/A	N/A
Power consumption (DC 12 V)	Average current draw x running time. Average 0.45 Ah/h (@12 V, 5 °C interior, 32 °C ambient temperature)	Average current draw x running time. Average 0.50 Ah/h (@12v, 5 °C interior, 32 °C ambient temperature)
Temperature range	+10 °C to -18 °C, continuously variable via electronic thermostat with digital temperature readout	+10 °C to -18 °C, continuously variable via rotary knob control
Insulation	CFC-free PU foam	CFC-free PU foam
System	Compressor with integrated control electronics, low voltage protection (can be adjusted), electronic fuse/automatic reverse pole protection	Compressor with low-voltage protection adjustable for leisure or starter battery by means of a slide switch, electronic fuse/automatic reverse pole protection, dynamically ventilated wire tube condenser, aluminium rollbond evaporator
Material	Housing and lid polypropylene	Cabinet: polypropylene, Lid: polyethylene
Colour	Pale grey/dark grey	Pale grey/dark grey
Weight	8.2 kg	approx. 11.5 kg
Dimensions (W x H x D)	235 x 358 x 540 mm	465 x 414 x 300 mm
Quality features	Extremely compact design, electronic thermostat with digital temperature display, 3-stage battery monitor, LED interior light, adjustable shoulder strap, two drink holders, easy and secure fastening with the vehicle safety belt	Detachable fold-up lid, sturdy carrying handle, vertical space for standing 2 litre bottles
Scope of delivery	DC connection cable, carry strap	DC connection cable, folding shelf
Product	CoolFreeze CDF 11	CoolFreeze CF 18
Ref. No	9105330684	9105303084

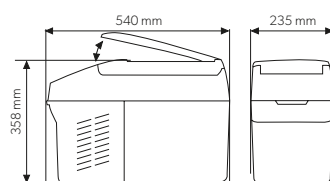

Hold 13 cans

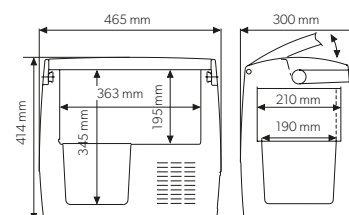

Hold 27 cans

DOMETIC WAECO COOLFREEZE CF 50 PACK

Portable compressor fridge or freezer


WAECO COOLFREEZE CF 80


Compressor fridge or freezer

 <p>CF50 + Insulated protective cover CB-CF50</p>	 <p>+ additional 2 year (parts only) compressor</p>
49 L	80 L
12/24 V DC and 100 - 240 V AC	12/24 V DC and 100 - 240 V AC
Approx. 45 W	Approx. 65 W
Average current draw x running time. Average 0.86 Ah/h (@12 V, 5 °C interior, 32 °C ambient temperature)	Average current draw x running time. Average 2.0 Ah/h (@12 V, 5 °C interior, 32 °C ambient temp)
+10 °C to -18 °C, free temperature setting via electronic thermostat with digital temperature readout	+10 °C to -18 °C, free temperature setting via electronic thermostat with digital temperature readout
CFC-free PU foam	CFC-free PU foam
Secop compressor with integrated control electronics, low voltage protection adjustable for leisure and starter battery via electronic system, electronic fuse/automatic reverse pole protection, dynamically ventilated wire tube condenser, aluminium rollbond evaporator	Secop compressor with integrated control electronics, low voltage protection adjustable for leisure and starter battery via electronic system, electronic fuse/automatic reverse pole protection, dynamically ventilated wire tube condenser, aluminium rollbond evaporator
Cabinet: polypropylene, Lid: polyethylene	Cabinet: coated steel, Top & base: polypropylene, Lid: polyethylene
Pale grey/dark grey	Pale grey/dark grey
19 kg	29 kg
630* x 480 x 360 mm (*W 760 incl. handles)	790* x 455 x 500 mm (*W 940 incl. handles)
Detachable lid, interior light, vertical space for standing 1.5 litre bottles.	Detachable lid (screw-on lid mount, variable left/right), sturdy latches and hinges, interior light, vertical space for 2 litre bottles. CF special electronics with soft start and turbo cooler
DC and AC connection cables, removable wire basket, detachable carrying handles, CB-CF50 insulated protective cover	DC and AC connection cables, removable wire basket, detachable carrying handles
CoolFreeze CF 50 Pack	CoolFreeze CF 80
9105303444	CF-80ACVERB1

| Holds 68 cans

| Holds 103 cans

 Variable motor speed optimisation MK2

 Suitable for solar operation

 Up to 50 °C below ambient temperature

 12/24 V DC and 240 V AC



DOMETIC COOL ICE

Rotomoulded iceboxes


Dometic Cool Ice iceboxes will keep your ice frozen for days and are perfect for a BBQ, the picnic, around the pool or even on a camping trip. Dometic Cool Ice iceboxes hold large amounts of ice and frozen goods for long periods and are ideal for continuous exposure to weather, especially on boats. Also for use in trucks, camping areas, sports games and outdoor parties.

- Designed for optimal performance/weight/volume balance
- Strong, ergonomic polyethylene handles (WCI 33 and up)
- Integrated polyethylene feet & large diameter drain plug
- Thick polyurethane refrigeration grade foam insulation
- Strong nylon latches with stainless steel fixing screws
- Fully integrated hinges with stainless steel rods
- Strong, seamless, UV stabilised/food grade polyethylene CFC free construction
- Lightweight, hygienic & easy to clean
- Extremely low heat absorption
- Integrated tie-down points
- Largest service network and 5 year warranty Australia wide



A SIZE FOR EVERYONE

Model	Capacity (Litres)	Dimensions (W x H x D)	Weight (kg)
WCI 13	13	388 x 305 x 245 mm	2.8
WCI 22	22	388 x 313 x 365 mm	4.2
WCI 33	33	400 x 440 x 360 mm	6.1
WCI 42	41	635 x 337 x 390 mm	7.5
WCI 55	55	565 x 420 x 485 mm	9.3
WCI 70	68	685 x 420 x 485 mm	10.4
WCI 85	87	835 x 435 x 495 mm	13.1
WCI 85W	86	835 x 435 x 495 mm	13.5
WCI 110	111	1050 x 440 x 510 mm	15.7

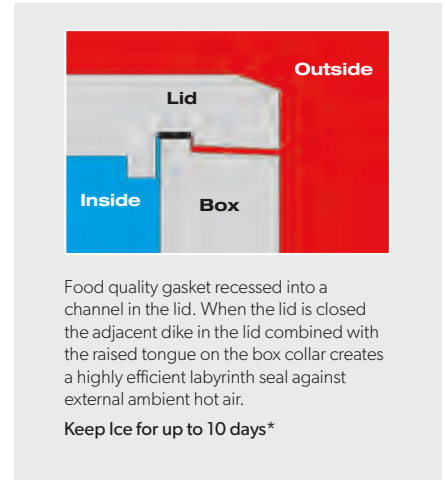

* Ice will last from 3 to 10 days depending on usage and conditions. dometic.com for further details.

DOMETIC WAECO BORDBAR THERMOELECTRIC COOLERS

Low-cost, light-weight, versatile

Thanks to their light-weight, thermoelectric coolers are particularly easy to carry and transport. Their cooling capacity of up to 20 °C below the ambient temperature is sufficient for most purposes, including car journeys, camping or picnics.

Dometic Waeco's range of thermoelectric coolers utilise wear and maintenance free technology and can be used for both cooling and heating. They are cost-efficient, reliable and are the perfect sized portable coolers.

DOMETIC WAECO BORDBAR TB 08 & TB 15



	TB 08	TB 15
Gross capacity	Approx. 8 L	Approx. 15 L
Power source	12 V	12 V
Weight	Approx. 3.2 kg	Approx. 5.2 kg
Dimensions (W x H x D)	200 x 298 x 442 mm	282 x 328 x 462 mm
Cooling capacity	Up to 20 °C below ambient	Up to 20 °C below ambient
Warming capacity	Up to 55 °C	Up to 65 °C
Product	Ref. No	
BordBar TB 08	9105302017	
BordBar TB 15	9105302025	



Up to 55 °C in the heating mode

Up to 65 °C in the heating mode

Up to 20 °C below ambient temperature

Up to 20 °C below ambient temperature



DOMETIC WAECO COOLPRO THERMOELECTRIC COOLERS

High-tech coolers with DC/AC and special electronics

Mobility, performance and convenience – these are the hallmarks of the Dometic Waeco CoolPro series. State-of-the-art thermoelectrics make for outstanding cooling results up to 25 °C below the ambient temperature. Add to this all the useful features and functions: 12/24/240 V DC/AC as standard, individual temperature regulation with LED display and memory function, plus more. At the touch of a button the coolers (+15 °C to +1 °C) can be turned into warmer boxes (+65 °C to + 50 °C). Dometic Waeco CoolPro – the comfort class of thermoelectric refrigeration.



Product benefits of the CoolPro series

- Highly effective insulation - Outstanding performance efficiency
- Dynamic interior ventilation - Significantly improved cooling performance
- Brushless motor fans - Long service life
- Intelligent power-save circuit - Electronics switch automatically to power-save mode once the desired interior temperature has been reached
- 12/24/240 V as standard - With priority circuit for 240 V
- Heat exchanger and high-performance Peltier element - Cooling performance up to 25 °C below ambient temperature
- Magnetic switch - Switches the interior fan off when you open the cooler
- Universal fixing kit - (optional for TC-14FL and TC-21FL)



DOMETIC WAECO COOLPRO TC 14FL

Thermoelectric cooler/warmer with TC special electronics



DOMETIC WAECO COOLPRO TC 21FL

Thermoelectric cooler/warmer with TC special electronics



DOMETIC WAECO COOLPRO TC 35FL





Thermoelectric cooler/warmer with TC special electronics




Gross capacity	Approx. 14 L	Approx. 21 L	Approx. 35 L
Voltage	12/24 V DC and 240 V AC	12/24 V DC and 240 V AC	12/24 V DC and 240 V AC
Power consumption (DC 12 V)	Approx. 55 W at 12 V DC Approx. 60 W at 24 V DC Approx. 80 W at 240 V AC	Approx. 55 W at 12 V DC Approx. 60 W at 24 V DC Approx. 80 W at 240 V AC	Approx. 55 W at 12 V DC Approx. 60 W at 24 V DC Approx. 80 W at 240 V AC
Average running time	30% at +20 °C ambient temperature	32% at +20 °C ambient temperature	35% at +20 °C ambient temperature
Temperature range	Cooling: +15 °C to +1 °C (up to 25 °C below ambient temperature); Heating: +65 °C to +50 °C	Cooling: +15 °C to +1 °C (up to 25 °C below ambient temperature); Heating: +65 °C to +50 °C	Cooling: +15 °C to +1 °C (up to 25 °C below ambient temperature); Heating: +65 °C to +50 °C
Insulation	Polyurethane full-foam insulation	Polyurethane full-foam insulation	Polyurethane full-foam insulation
System	Wear-free thermoelectrics (Peltier system), cold transmission to the interior by dynamically ventilated aluminium heat exchanger, heat dissipation to the outside by high-performance heat exchanger and brushless motor fan	Wear-free thermoelectrics (Peltier system), cold transmission to the interior by dynamically ventilated aluminium heat exchanger, heat dissipation to the outside by high-performance heat exchanger and brushless motor fan	Wear-free thermoelectrics (Peltier system), cold transmission to the interior by dynamically ventilated aluminium heat exchanger, heat dissipation to the outside by high-performance heat exchanger and brushless motor fan
Material	Sturdy injection moulded parts	Sturdy injection moulded parts	Sturdy injection moulded parts
Colour	Dark grey/pale grey	Dark grey/pale grey	Dark grey/pale grey
Weight	Approx. 5 kg	Approx. 6 kg	Approx. 10 kg
Dimensions (W x H x D)	303 x 328 x 450 mm	303 x 420 x 450 mm	376 x 460 x 550 mm
Quality features	TC special electronics: 7-stage electronic thermostat with LED indicators, memory function, ON/OFF and cold/warm option activated with soft-touch operating panel intelligent power-save circuit. Integrated mains supply unit with priority circuit, outstanding cooling performance, magnetic switch to deactivate the interior fan when the box is opened, detachable lid with magnetic closure, sturdy, fold-away handle	TC special electronics: 7-stage electronic thermostat with LED indicators, memory function, ON/OFF and cold/warm option activated with soft-touch operating panel, intelligent power-save circuit. Integrated mains supply unit with priority circuit, outstanding cooling performance, magnetic switch to deactivate the interior fan when the box is opened, detachable lid with snap lock closure, handy carrying grips, vertical space for 2-litre bottles, adjustable grid divider	TC special electronics: 7-stage electronic thermostat with LED indicators, memory function, ON/OFF and cold/warm option activated with soft-touch operating panel, intelligent power-save circuit. Integrated mains supply unit with priority circuit, outstanding cooling performance, magnetic switch to deactivate the interior fan when the box is opened, detachable lid with snap lock closure, handy carrying grips, vertical space for 2-litre bottles, adjustable grid divider
Test marks	CE, TÜV/GS, e-approved to 2006/28/EC (Automotive EMC Directive)	CE, TÜV/GS, e-approved to 2006/28/EC (Automotive EMC Directive)	CE, TÜV/GS, e-approved to 2006/28/EC (Automotive EMC Directive)
Product	CoolPro TC 14	CoolPro TC 21	CoolPro TC 35
Ref. No	9105302047	9105302086	9105302111

OPTIONAL EXTRAS

Product	Universal fixing kit	Low voltage protector	Universal fixing kit	Low voltage protector	Universal fixing kit	Low voltage protector
Ref. No	UFK-T	AC-M50K	UFK-T	AC-M50K	UFK-T	AC-M50K

-  12/24 V DC and 240 V AC
-  Up to 25 °C below ambient temperature
-  Up to 65 °C in the heating mode
-  High performance thermoelectric

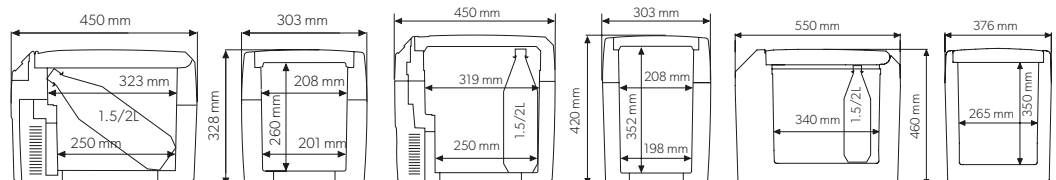




3-WAY ABSORPTION COOLERS

Cooling with 12 V, 240 V & LPG

Silent and truly mobile, absorption coolers give camping enthusiasts all the freedom they need. Gas operation in a remote field, convenient 240 V hook-up at the campsite, power supply from the 12 V socket in cars or motorhomes – anything is possible! Switch-over from one energy mode to another in a jiffy! Whether LPG, 12 or 240 V, the refrigeration system adjusts to suit your needs – Cooler and fridge/freezer models available.

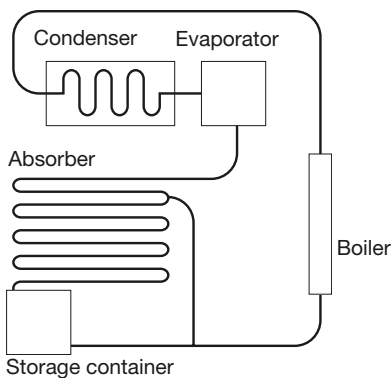

HOW ABSORPTION COOLING WORKS

A solution of ammonia and water are heated in the boiler causing the ammonia to be driven off as a vapour. The vapour is condensed to liquid and fed into the evaporator where it combines with hydrogen and evaporates, thereby digesting heat. The mixture of ammonia and hydrogen then passes through the absorber where the ammonia is absorbed back into the water. The re-combined water and ammonia is then returned to the boiler so the process can continue.

DOMETIC COOLFUN CA 35

Entry level absorption cooler for 12 V, 240 V and LPG

DOMETIC RC1180

Absorption fridge and freezer for 12 V, 240 V and LPG

		
		
Gross capacity	Approx. 35 L	Approx. 30 L fridge, 16 L freezer
Power source	240 V AC/72 W 12 V DC/72 W LPG/12g/h	240 V AC/120 W 12 V DC/120 W, LPG/19 g/h
Material	Cabinet: coated steel, Lid: PE	Tough rotomoulded cabinet and lid
Colour	Silver/grey	Blue
Weight	19.5 kg	26 kg
Dimensions (W x H x D)	520 x 454 x 515 mm	640 x 520 x 520 mm
Quality features	Controller for gas and power operation, recessed side grips for convenient transport, lid with round rubber sealing and extra magnetic latch, evaporator with recess for ice cube tray	Piezo ignition, thermostat regulation in 240 V and gas modes, continuous running on 12 V. Removable divider – also operates as 50 litre fridge.

Product	Ref. No	Product	Ref. No
CoolFun CA 35	9105303534	RC1180	9105201065




EASY TO CARRY
I Sturdy recessed handles.



3 WAY POWER
I 12 V DC, 240 V AC & LPG.



GAS OPERATED
I Runs for up to 30 days on 9 kg gas bottle.

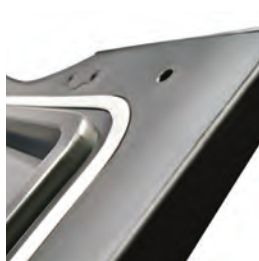

INSULATION & SECURE SEAL
I Keeps items cool up to 25 °C below ambient.



ICE TRAY INCLUDED

 12/24 V DC and 240 V AC

 CA 35 Up to 25 °C below ambient temperature

 Gas

 RC 1180 Refrigerator & freezer

DOMETIC WAECO ACCESSORIES

Range of genuine Dometic Waeco accessories

Does the need for outdoor adventure take you over rough terrain at times? Go ahead, as the insulated protective cover allows your fridge/freezer to take on any challenge. The cover protects from moisture, dust and dirt. It also provides effective insulation, improving the cooling capacity and therefore the energy consumption even further.



DOMETIC WAECO CFX INSULATED PROTECTIVE COVERS CFX 95DZW

- Designed to fit the CFX 95DZW portable fridge and freezer
- Protects against dirt, dust, sand, moisture & water splashes
- Extra insulation against extreme outside temperatures
- Saves battery power & improves overall efficiency
- Protects against excessive movement with eyelets for securing to vehicle
- Direct access to controls
- Insulation: interior lining of aluminium coated polyester
- Sides & top made from reliable silver-grey Oxford nylon fabric
- Bottom & ends made from hard-wearing rubber coated nylon
- Sturdy zips for easy fitment
- Practical pockets for storing power leads & other fridge accessories
- Phone pocket next to the USB output
- Weight: 2.4 kg



DOMETIC WAECO CFX INSULATED PROTECTIVE COVERS CFX 50W

- Designed to fit CFX 50W portable fridge and freezer
- Protects against dirt, dust, sand, moisture & water splashes
- Extra insulation against extreme outside temperatures
- Saves battery power & improves overall efficiency
- Protects against excessive movement with eyelets for securing to vehicle
- Open panels for ventilation, handles & connection plugs
- Direct access to controls
- Insulation: interior lining of aluminium coated polyester
- Sides & top made from reliable silver-grey Oxford nylon fabric
- Bottom & ends made from hard-wearing rubber coated nylon
- Sturdy zips for easy fitment
- Practical pockets for storing power leads & other fridge accessories
- Phone pocket next to the USB output
- Weight: 1.3 kg

Product	Ref. No
CFX IC28	9108300203
CFX IC35	9108300003
CFX IC40	9108300004
CFX IC50	9108300005
CFX IC65	9108300006
CFX IC95100	9108300206



DOMETIC WAECO CF PROTECTIVE COVERS

- Designed Outside: high-quality silver-grey, Oxford nylon, lid and base in robust, rubber coated, black nylon. Inside: aluminium coated polyester
- Detachable lid and base, outside pockets to store small items, four fixing rings to secure safely in the vehicle

Product	Ref. No
AC-CB-CF 18	9105303084
AC-CB-CF 80	9108300003

DOMETIC WAECO CFX IN-VEHICLE INSTALLATION SOLUTIONS

If you are travelling on corrugated roads, having your fridge restrained with a fixing kit is a safe option and helps the fridge travel with the suspension of the vehicle. The accessories range also features fridge slides, for more convenient access to the fridge in your vehicle.

DOMETIC CFX FIXING KIT

Suits all CFX (Also suits CF 40, CF 50 & CF 80)

- 4-point fixing for reliable restraint, low profile tie-down anchor points. Strong metal D-ring folds down when not in use. Fixing hardware includes nylon insert shake proof nuts, heavy duty straps and quick release buckles
- Weight 0.8 kg

Product	Ref. No
Dometic CFX Fixing kit	9108300002



DOMETIC CFX 28 QUICK RELEASE FIXING KIT


- Suitable for CFX 28 only
- W250 x H26* x D423 mm (* includes handle/lever)
- Standard fridge height – 425 mm
- Installed fridge height – 444 mm
- Secure fixing for CFX 28 in trucks and other vehicles
- Quick release mechanism for easy removal of fridge – no tools required – no straps
- Hardware included
- Stainless steel adapter feet screw into nutserts in base of fridge
- Unobtrusive footprint – smaller than fridge

Product	Ref. No
Quick release fixing kit	CFX-QFK



DOMETIC FRIDGE SLIDES

	CFX SLD 35/40	CFX SLD 50/65	AC-SLD-110	CFX SLD 95/100
	Suits CFX 35 & CFX 40	Suits CFX 50, CFX 65, CFX 65DZ	Suits CF 80	Suitable for CFX 95DZW, CFX 95DZ2, CFX 100W
Material / Colour	Powder coated metal / grey	Powder coated metal / grey	Powder coated metal / grey	Powder coated metal / grey
Weight	16.5 kg	17 kg	19.4 kg	22 kg
Dimensions Internal (W x D)	410 x 740 mm	466 x 740 mm	520 x 888 mm	550 x 960 mm
External (W x H x D)	476 x 79 x 791 mm	533 x 79 x 791 mm	581 x 79 x 910 mm	613 x 79 x 1011 mm
Extended (D)	1420 mm (1451 incl. lever)	1420 mm (1451 incl. lever)	1660 mm	1850 mm (incl. lever)
Installed fridge height increase	29 mm (all models)		• 100 kg max. load capability, tie-down • Strap included	• 115 kg max load capability (up from the 100kg on smaller slides)
Quality features	<ul style="list-style-type: none"> • 100 kg max. load capability • 4 x heavy duty straps & 4 x quick release buckles • 4 x M6 x 16 screws & washers are included in the set • Two sets of mounting holes: <ol style="list-style-type: none"> 1: To suit feet in base of CFX (CFX-SLD-35/40 also fits CF-40/50) for quick fitment 2: To match M6 thread nutserts in base of CFX for semi-permanent installation 			
Product	DOMETIC CFX Fridge slide 35/40	DOMETIC CFX Fridge slide 50/65	Waeco CF 80 Fridge slide	DOMETIC CFX Fridge 95/100
Ref. No.	9108300001	9108300000	9109003236	9105306558





DOMETIC WAECO CFX WIRELESS DISPLAY

Suits CFX 28, CFX 65DZ

The wireless display shows the internal temperature of the fridge from a distance. It also shows the voltage protection level set, and has adjustable alarm limits that enable an audible warning if the temperature rises or the battery gets low.

- Wireless operation (2.4GHz) - range up to 15 m
- Displays: fridge temperature, fridge power source, battery protection setting, alarm setting
- Temperature alarm setting - 2 levels, audible & visual alarm
- Backlit display (when 12/24 V DC connected)
- Dual power source: AAA batteries (included)
- 1.8 m lead/cigarette & plug 12/24 V
- Dimensions (W x H x D): 66 x 85 x 23 mm
- Weight 0.1 kg

Product	Ref. No
CFX Wireless display	9105306632



DOMETIC FRIDGE STAND

Portable fridge stand

2 height positions (H x D)	450 x 330 mm & 310 x 450 mm (± 20 mm).
Quality features	Strong aluminium frame, folds up easily and compact, one adjustable foot, supports up to 80 kg, comes with storage bag

Product	Ref. No
CoolFreeze Fridge Stand	9108400101



DOMETIC COOLPOWER RAPS12R-U2

12 V fridge power wiring kit - heavy duty to suit all Dometic Waeco compressor fridge/freezers

Highly recommended for replacement of standard vehicle cigarette lighter sockets which are often inadequate to properly run fridges due to thin wiring and associated voltage drops. One kit does all. This truly universal unit is packed with the following features:

- Compact design for internal mounting in the rear of vehicle
- 6 metres of heavy duty 6 mm cable
- Switchable between constant power for running portable fridge and on/off with engine for battery charging
- Even in "constant power" mode, cuts out at very low vehicle battery voltage to protect the battery
- Choice of socket-heavy duty hella style and cigarette type both built in
- Fuse and installation kit with snap action mounting plate included

Product	Ref. No
CoolPower RAPS12R-U2	9108400100



DOMETIC WAECO SPARE PARTS



12 V CABLE
CF 25/35/40/50/50DZ/60
80-T2-2000AG



12 V CABLE
CF-18 only
80-T2-2000AI



12 V CABLE
Suits CF-80/80DZ/110
80-T2-1500AG1



240 V CABLE
Suits CFX & CF range
38-AU-2000B4



HINGE ASSEMBLY
Suits CF-80/80DZ/110
028-HINGEASA



LATCH ASSEMBLY
Suits CF-80/80DZ/110
028LOCKASA



LID LANYARD
Suits CF-50/50DZ/60
005NYLONA'SA




LID LANYARD
Suits CF-80/80DZ/110
028NYLONA'SA



12 V CABLE
Suits CFX-95DZ2/ 95DZW
4450014395



LIGHT ASSEMBLY
For CF-35 & CF-40 only
80-01026LGT



LIGHT ASSEMBLY
All CF models except
for CF-35 & CF-40
81-01980LGT



CHARGE CABLE
RAPS36 charge cable
80-T2-1500JL



12 V CABLE
For thermoelectric models
80-T1-2800AA



240 V CABLE
For thermoelectric models
38-AU-2000B1



LATCH BUNGEE
WCI Icebox, pair
WCI-2001



LATCH FRONT
WCI Icebox, pair
WCI-2002



BUNG
With gasket, WCI Icebox
WCI-1007



12 V CABLE
Suits CFX-28/35W/40W/50W/65W/
65DZ/35/40/50/65
4450014334

PORTABLE KITCHEN SOLUTIONS

DOMETIC VACUUM SEALER 12/240 V

The new lightweight, low profile Dometic Vacuum sealer keeps food fresh up to five times longer than refrigeration alone. It runs on both 12 V DC and 240 V AC power, ideal for home or on the road.

- 12/240 V
- Keeps food fresh up to 5 times longer*
- Locks in flavour, colour and nutrition
- Eliminate freezer burn & wasted food
- For outdoor and indoor use
- Maximise fridge & freezer space
- Manual and automatic vacuum sealing
- W380 x H83 x D152 mm



DOMETIC VACUUM SEALER ROLLS

- Available in 8" and 11"
- 2 rolls x 3m each
- BPA free and food grade quality
- Fridge, freezer, microwave and simmer safe
- Maintain freshness and nutritional benefits



Product	Ref. No
Vacuum sealer	9108400481
8" Vacuum sealer	9108400482
11" Vacuum sealer rolls	9108400483

* Various factors, including freshness of food prior to vacuum sealing, traces of contaminants, storage temperature and humidity may affect the storage life of food.

DOMETIC PERFECTKITCHEN MCK 750

If something hot is what you need; this handy kettle, especially designed for operation in vehicles, provides you with a pot of tea, a cup of coffee or a mug of soup in no time at all. This robust gadget suits 12 V operation. The automatic cut-off function stops it from overheating when empty and ensures safe and comfortable handling. An indispensable helper on board!



Capacity approx.	0.75 L
Voltage	12 V DC
Average power consumption	12 V: 200 W
Colour	Black/silver
Dimensions (W x H x D)	190 x 205 x 125 mm (incl. fixing kit)
Weight	0.8 kg
Test marks	e-approved (Automotive EMC Directive), complies with German Foodstuff and Consumer Goods Act (LMBG)
Scope of delivery	Fixing kit for wall or desk mounting
Quality features	Robust relay technology, switches off automatically when the boiling temperature has been reached or when there's no water in the kettle, status indication
Product	Ref. No
PerfectKitchen MCK 750, 12 V	MCK 750 12/N

DOMETIC 5100

This all-rounder is not only an effective source of heat but also an excellent stove for cooking. Great for the caravan, boat or camping.

Burning time	approx 6 to 8 hours
Number of burners	1
Burner capacity	1500 W per canister
Boiling time	Approx. 10 minutes for 1 L of water
Tank capacity	1.2 L
Dimensions (ØxH)	280x 290 mm
Weight	3 kg
Product	Ref. No
Dometic 5100	9103303920



TRUMA LEVELCHECK

The practical LevelCheck uses LEDs for quick and reliable indication of measuring liquid gas. The measuring device is simply placed against the gas cylinder in a horizontal position.

Dimensions (WxHxD)	135 x 35 x 30 mm
Weight	Approx. 100 g (incl. battery)
Power supply	9 V battery
Product	Ref. No
Truma LevelCheck	9108400550



DOMETIC POWERVAC PV-100

The handy vacuum cleaner comes complete with integrated battery – no need for an external power supply. It is strong enough to get rid of ground-in dirt. Even liquids are no problem for the combined wet-and-dry cleaner. It doesn't require much room for storage. Small and compact, the handy gadget slots in to the boot or vehicle interior, the garage or the storeroom.



- Handy, battery-powered vacuum cleaner for mobile use in cars, motorhomes, caravans, boats and home
- Maximum mobility with rechargeable 12 V battery
- Can be recharged from 12 and 240 V
- Easy to clean dust container and fabric filter
- Cleaning power: 400 mm water column

Motor	12 V DC, 28,000 rpm
Battery	12 V DC, 2.6 Ah
Operating time	Approx. 18 min ± 10%
Charging time	10 to 14 h (automatic cut-off)
Capacity	3.8 L
Power consumption	Approx. 90 W
Cleaning power	Approx. 400 mm water column (± 10%)
Operating temperature	+ 40 °C to 0 °C
Material	Handle: ABS; Filter: polyester; Dust container: PP
Dimensions (W x H x D)	270 x 320 x 198 mm
Weight	2.15 kg
Scope of delivery	Vacuum cleaner, hose, attachments for upholstery, rugs and narrow gaps, carrying strap, mains adapter, 12 volt charging cable, operating instructions.
Product	Ref. No
PowerVac	PV 100

DOMETIC SANITATION



HOME LIKE COMFORT

Small, but a big performer!
Handy and space saving, the 970 series adds hygienic comfort to your recreational vehicle or when enjoying the outdoors. Many sensible functions are contained in the smallest possible space to ensure you can enjoy home like comfort when travelling.

DOMETIC 970 SERIES

Space saving portable toilets with 360° pressurised flush

- Ingenious disposal system: extra long, pivoting spout and vent openings for clean, splash-free discharge
- 8.7 litre flush water tank – sufficient for 27 flushes
- Useful accessories: spare tanks, fixing kit
- Safety through overflow protection and tank level indicator
- Push button control for powerful flushing with less pumping
- Extra strong 360° pressure flush for effective cleaning
- Portable toilet in two sizes

	SANIPOTTIE 972	SANIPOTTIE 976
Flush water tank capacity	8.7 L	8.7 L
Waste tank capacity	9.8 L	18.9 L
Material	ABS	ABS
Colour	White / grey	White / grey
Dimensions (W x H x D)	342 x 312 x 390 mm	342 x 385 x 390 mm
Weight	5.4 kg	5.9 kg
	Product	Ref. No
	DOMETIC 972	9108552682
	Product	Ref. No
	DOMETIC 976	9108552688



FIXING KIT

For easy and safe installation of Dometic 970 series

Product	Ref. No
Fixing kit	385320005

THE UNIQUE DOMETIC CARE HYGIENE SYSTEM

FOR YOUR MOBILE TOILET

The Dometic Care product range is synonymous with cleanliness in every micro pore and the result of innovative research. Perfectly compatible products for the removal of stains and toilet odours – as effective as necessary, as gentle on the environment as possible and completely user friendly in the process.

DOMETIC POWERCARE


Highly effective additive for the waste holding tank, breaks down waste and prevents unpleasant odours.

- Packed in soluble film
- Just 1 tab per full tank
- For all portable toilets
- Space-saving packaging
- Content: 16 tabs

DOMETIC GREENCARE

Highly effective environmentally friendly tab for the waste holding tank. Breaks down waste and prevents unpleasant odours.

- Powerful and environmentally friendly
- Packed in soluble film
- Just 1 tab per full tank
- For all portable toilets
- Space-saving packaging
- Content: 16 tabs

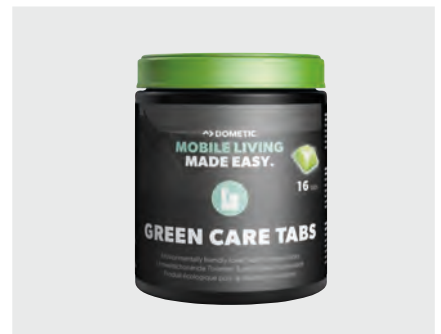

Product	Ref. No
DOMETIC POWER CARE TABS	960000125
DOMETIC GREEN CARE TABS	960000133

DOMETIC EXTRACARE

Fluid additive for the flush water tank. Can be used on its own or in combination with other Dometic sanitation products.

- Cleans and protects
- Protects the rubber seals
- Creates a smoother flush
- Prevents stains and scaling
- Reduces the build-up of scale
- Integrated deodoriser adds a pleasant fragrance
- Micro-thin protective layer facilitates cleaning of the toilet bowl



Product	Ref. No
DOMETIC EXTRACARE 1.5 L	9107200001

DOMETIC POWERCARE

Highly effective fluid additive for the waste holding tanks. Breaks down waste into liquid and prevents unpleasant odours.

- Indispensable for winter campers
- Simple dosing with measuring strip
- Remains effective after freezing and thawing
- Breaks down waste to facilitate disposal
- Prevents the emergence of gas and unpleasant odours in the holding tank



Product	Ref. No
DOMETIC POWERCARE 1.5 L	9107200002

DOMETIC SPECIALCARE

Ecologically compatible fluid additive for the waste holding tanks. Waste can be disposed at almost every campsite.

- Pleasant, fresh scent
- Outstanding odour protection
- Facilitates waste storage and discharge
- Remains effective after freezing and thawing
- Eco-friendly - awarded with ecological hallmark




Product	Ref. No
DOMETIC SPECIALCARE 1.5 L	9107200003

DOMETIC MOBILE ENERGY SOLUTIONS

Power supply to voltage converters



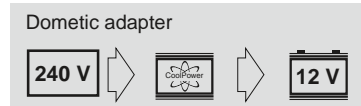

Enjoy the comforts of home even when you are away with Dometic family of 240 V adapters and inverters.

Ideal for running your 12 V Dometic fridge on 240 V mains, laptops and other low power products on 12 V from your vehicle and batteries.



DOMETIC COOLPOWER EPS 817 240 V adapter

DOMETIC COOLPOWER MPS 50 240 V adapter

		
		
Input voltage	240 V AC/50 Hz	110 to 240 V AC
Output voltage	13 V DC	27 V DC
Continuous load	6 A	6 A
Output power	72 W	150 W
Dimensions (W x H x D)	115 x 65 x 170 mm	120 x 70 x 200 mm
Weight	0.6 kg	Approx. 1 kg
Battery voltage	12/24 V DC	12/24 V DC
Quality features	Switch mode, automatic priority for mains operation	Switch mode, automatic priority for mains operation
	<p>240 V mains connection, 12 V 6 A</p> <p>Required for the connection of listed DC compressor driven fridge/freezers. Suitable also for all other 12 V thermoelectric coolers or as a universal power unit via the integrated cigarette lighter socket. Ideal for use at home, in the hotel, at the campsite, in the weekend home, etc.</p> <p>Suits all thermoelectric coolers and following compressor models: Current models: CDF 11, CF 18 Old models: CF 25, CF 35DC to CF 60DC, CDF35/40</p>	<p>For problem free connection to 110 to 240 V mains systems. Suitable for all Waeco compressor models. All compressor models, CD-30, CU-80 series, CU-90 series</p>
Product	EPS-817	MPS-50
Ref. No	9109002086	9109002476

DOMETIC PERFECTPOWER

MCI 150-12

12 V to 240 V inverter

Input voltage	12 V DC (10 to 15 V)
Output voltage	240 V AC
Curve	Modified Sine Wave
Output frequency	50 ± 2 Hz
Full load current input	13.75 A
Peak/continuous power	250/150 W
USB output	5 V DC 500 mA (max)
Maximum ambient temperature	50 °C ± 5 °C
Weight	530 g
Dimensions (ØxL)	66 x 182 mm
Quality features	<ul style="list-style-type: none"> • Convenient fit in vehicle cup holder • Mobile energy for 240 V low-power consumers • USB output as standard • Light-weight, round and super-compact • Thermal overload protection, electronic short circuit protection & automatic low voltage shutdown
Product	Ref. No
PerfectPower CanSize Inverter	9109002373



DOMETIC PERFECTCHARGE MCA CHARGERS

						
Model	MCA1215	MCA1225	MCA1235			
Charge output	1 House battery + 1 Starter battery	2 House batteries + 1 Starter battery	2 House batteries + 1 Starter battery			
Input voltage		230 volt AC – 50 Hz				
Charge mode		6 stage				
End of charging voltage		14.4 volt / 14.7 volt (Adjustable by dip switch)				
Charging current	15 amps	25 amps	35 amps			
Weight	approx. 1.6 kg	approx. 1.7 kg	approx. 1.9 kg			
Dimension (W x L x H)	238 x 179 x 63 mm	238 x 179 x 63 mm	274 x 179 x 63 mm			
Recommended battery capacity	70 – 170 Ah/h	75 – 300 Ah/h	100 – 400 Ah/h			
Float charging voltage		13.8 volt DC				
Energy efficiency up to %		92%				
Protection class		IP 21				
Battery type	AGM, Gel, Lead acid and eStore Lithium battery					
Testing/certification	In compliance with Australian standard AS/NZS60335.2.29 and AS/NZS60335.1					
	Product	Ref. No	Product	Ref. No	Product	Ref. No
	PerfectPower Battery charger MCA1215	9108400809	PerfectPower Battery charger MCA1225	9108400810	PerfectPower Battery charger MCA 1235	9108400811

DOMETIC COOLPOWER BATTERY SOLUTIONS



DOMETIC BATTERY PACK FOR COMPRESSOR FRIDGE/FREEZER

- Dual output sockets (12 V and hella) - ideal for running 12 V portable fridge and LED lights simultaneously 44 Ah deep cycle AGM battery cells
- Dimensions: W230 x H245 x D227 mm
- Weight: 13.5 kg
- Built-in charging posts for charging via 240 V to DC
- 1.5 m 12 V charging lead
- Digital V display
- Battery conditions LED's/test button
- Rechargeable via solar panels
- Secure screw connection charging socket

Product	Ref. No
CoolPower RAPS44	9105330164



DOMETIC RAPS72 KIT CRADLE FOR TWO BATTERY PACKS

Get twice the convenience of remote battery power with the RAPS72 KIT. Combines two CoolPower batteries to provide a generous amp hours of power for those longer stays. Ideal for your CF 80 or CFX 95DZW fridge.

- Sturdy powder coated steel cradle
- Positive location lugs
- Connection lead

Product	Ref. No
Dometic CoolPower RAPS72 KIT	RAPS72KIT

* Kit only, batteries not included.

DOMETIC SOLAR POWER




DOMETIC PORTABLE SOLAR PS80 AND PS120

Portable folding solar panel kit - 12 V, PS80: 80 W, PS120: 120 W

Dometic solar panels are an alternative power source you can use to charge your batteries. They have an inbuilt 10 A heavy duty voltage regulator and have adjustable feet so that you can direct them towards the sun throughout the day and come in 80 and 120 W sizes.

- High performance monocrystalline silicon
- 12 V, 10 A heavy duty regulator with battery temperature sensor
- 5 m lead with alligator clips and anderson plug connector
- Adjustable feet - for optimum angle to the sun
- Folds up easily and compact
- Comes with protective carry bag

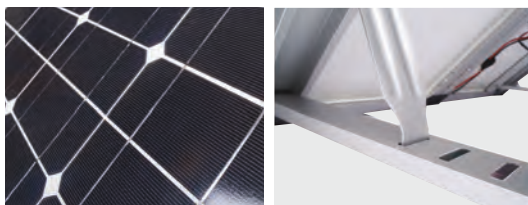

	PS80	PS120
Dimensions Folded (W x H x D)	534 x 544 x 70 mm	534 x 754 x 70 mm
Weight	11.3 kg (incl. cables and carry bag)	14 kg (incl. cables and carry bag)
Max power output	4.6 A	6.9 A
Product	Ref. No	
Portable solar PS80	9108400187	
Portable solar PS120	9108400188	

DOMETIC BOX AWNINGS




Dometic PerfectWall & PerfectRoof Box awnings are compact and lightweight and come in various lengths to suit most RV, vehicle and camper applications. Engineered with extra strong arms and supports for optimal fabric tension and resistance against wind. Available in manual and optional integrated 12 V motor (with manual override) on some models.

SUPERIOR QUALITY FABRIC

Designed with UV resistant 3-ply polyester reinforced vinyl fabric with waterproof welded rope seams. The Dometic Box awnings are rot proof and can be put away damp without fear of damaging the fabric. Available in horizon grey and blue fabric colours, with white or anthracite grey casings.

WALL & ROOF MOUNT, MANUAL OR 12 V RETRACTABLE ARMS

- 12 V or manual operation with telescopic crank
- Solid retractable arms to provide optimal tension & resistance against wind
- Fabric is 13 oz. 3-ply polyester reinforced vinyl in horizon blue and grey
- Corrosion resistant powder coated profile in white or anthracite grey

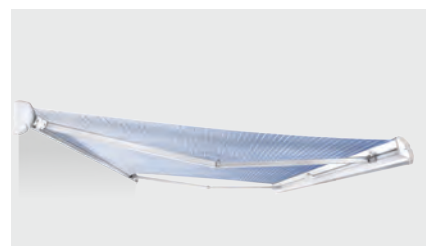

DOMETIC PERFECTWALL 1500

- Robust wall mounted awning
- Projection of 2 - 2.5 m
- Aluminium end caps
- 2.6 - 6 m lengths

DOMETIC PERFECTROOF 2500

- Robust roof mounted awning
- Projection of 2.5 m
- Aluminium end caps
- 3.5 - 5.5 m lengths

Colours The colour in the above images should be used as a guide only. For exact fabric colour, see your Dometic dealer.



MILENCO

EUROPE'S LEADING MANUFACTURER OF AWARD WINNING CARAVAN PRODUCTS

Milenco produce a range of quality products specially designed for the caravanning market. Milenco mirrors have been designed to offer superior vision and a vibration-free view. Milenco levels are available in different sizes and ideal for soft ground. The Milenco level indicator is designed for fast easy levelling and the new Milenco Ball weight gauge gives you a precise ball weight even after 1000 uses



MILENCO AERO EXTRA WIDE MIRRORS

The mirror head design (registered design) utilises airflow around your car to stabilise and balance the mirror head at speed. This mirror has been extensively tested at speeds up to 250 km/h (155 m/ph), to ensure that you get the best vision possible. This design also offers superior performance in high winds and the effect of passing large commercial vehicles has been minimised.



MILENCO GRAND AERO EXTRA WIDE MIRRORS

The Grand aero mirror offers all the benefits of the original Aero mirror, plus the maximum view possible, combined with very high stability.

The head is the largest ever used on a caravan towing mirror and has been specifically designed to be extremely stable. The shape enables you to see far past your caravan and cars in all three lanes on the highway.



MILENCO LEVEL INDICATOR GAUGE


Level indicator for Quattro and Triple levels. Use this clever gauge for fast and easy levelling. Simply place on the caravan floor to instantly see which step to use on your Milenco Triple or Quattro level for instant levelling.



Product	Ref. No
Milenco Mirror Aero wide - pair	M 2899
Milenco Mirror Grand wide - pair	M 2912
Milenco Level indicator gauge	M 3117

MILENCO LEVELS

MILENCO TRIPLE LEVEL

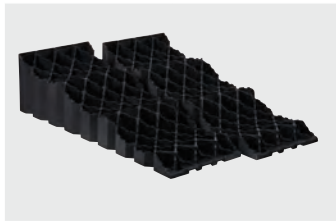

- This is the tallest (160 mm) 3 step level ever made. The level incorporates lattice, high-grip upper tread surface. They pocket the wheel at every height eliminating the need for chocks. They also have a solid base to stop sinking on soft ground.

- Capacity: 2000 kg per wheel.

MILENCO QUATTRO LEVEL



- We are very proud of the light-weight, innovative (patent pending) registered design. This gets over all of the problems using conventional levels on soft ground, but more importantly, it's twice as high as conventional plastic levels.

- Capacity: 2000 kg per wheel.

MILENCO T1 MINI LEVEL



- The Milenco T1 levels are light-weight with an intelligent design, featuring 50% base surface area and 50% top surface area. The Milenco levels are ideal to use on softer grounds or sand. Extra wide and heavy duty, the Milenco level incorporates a lattice and a high-grip upper tread surface, pocketing the wheel at every height.

- Capacity: 1250 kg per wheel.

MILENCO T2 MIDI LEVEL



- The Milenco T2 levels are light-weight with an intelligent design, featuring 50% base surface area and 50% top surface area. The Milenco levels are ideal to use on softer grounds or sand. Extra wide and heavy duty, the Milenco level incorporates a lattice and a high-grip upper tread surface, pocketing the wheel at every height.

- Capacity: 1250 kg per wheel.

Product	Ref. No	Product	Ref. No	Product	Ref. No	Product	Ref. No
Milenco Level triple pair	M-2936	Milenco Level quattro pair	M 2615	Milenco Mini Level T1 pair	M 3896	Milenco Midi Level T2 pair	M 3902

MILENCO BALL WEIGHT GAUGE

Milenco Precision calibrated ball weight gauge has been manufactured using unique materials so its calibration remains accurate even after 1000 uses. The scale goes up to 400 kg enabling you to have a reliable and accurate reading, helping to ensure you travel safely.

Ideal for calculating the ball weight on:

- Single and twin axle caravans
- Camper trailers
- Off road camper vans/trailers
- Trailers
- Horse floats
- Boat trailers



MILENCO COMPACT WHEEL CLAMP

The Milenco Compact wheel clamp is a unique and innovative design with an integrated locking mechanism and winding handle. Simply turn the winding handle to clamp onto the wheel.

Fits wheels from 12" - 16" up to 225 tyre size in alloy or steel. Comes complete with adaptors to fit wheels with either small or large wheel nuts.

Fitted with superior quality lock and high security key system. A foam backing is on the wheel clamp to protect your alloy wheels.

- Supplied with a carry case
- 2 x high security keys



Product	Ref. No
Milenco Ball weight gauge	M-3155
Milenco Compact wheel clamp	M-2745

Dometic enriches people's experiences when away from home by providing smart, reliable products with outstanding design for mobile living in the areas of Climate, Hygiene & Sanitation and Food & Beverage. Dometic manufactures and sells products within these categories for use in recreational vehicles, trucks and premium cars, cruisers and work boats, and for a variety of other uses.

Dometic operates 22 manufacturing/assembly sites in the North America, South America, Europe and Asia-Pacific regions.

Dometic products are sold in more than 100 countries. Dometic has 6,500 employees and is listed on NASDAQ Stockholm.

E & OE. Please note: Dometic may introduce modifications to products, therefore details herein are subject to change without notice. No liability is accepted for errors. Printing processes may not depict colour accurately. Feb17



Dometic Australia Pty. Ltd.
1 John Duncan Court
Varsity Lakes QLD 4227
1800 21 21 21
dometic.com

