


This installation guide is for the Kassa Chalkboard Contact Paper



Cleaning

First, wash the surface with a powerful grease-remover such as TSP (Tri-Sodium Phosphate). Make sure you allow enough time for the surface to dry properly

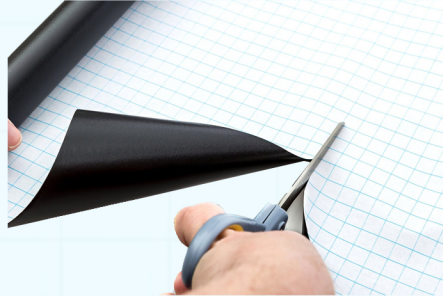

Guidance

Using a level or chalk line, trace a guideline to ensure perfect alignment using the chalkboard paper to mark the height. If you are facing an uneven surface, mark the height of your guideline on the lowest side of the surface.



Measuring & Cutting

Using scissors, you will be able to trim and shape your chalkboard paper at will should you come across any irregularities during the installation. Measure and mark your chalkboard paper and then lay it on a cutting mat or cutting board to cut off the unwanted portion.



Peel

Simply fold back half of the protective paper in the back without touching the adhesive portion with your fingers. We strongly recommend you wash your hands before you start the installation to ensure no dust particles or greasy residue are transferred on the adhesive.



Align & Stick

Now align the adhesive portion with your guideline and apply a light pressure. This will allow you to validate the positioning of your chalkboard paper. Once you are satisfied with its placement and alignment, you may remove the rest of the protective paper and apply a firm pressure across the entire surface.



Overlapping

Once you've successfully installed the chalkboard paper, you may continue the process making sure you overlap as you go. This will result in a continuous and even layout of the entire project

IMPORTANT : *On newly painted walls, allow minimum of 3 weeks for the paint to set and dry before installing the Chalkboard Paper. For small appliances such as toasters, counter ovens & others, leave a gap of 2 inches (6cm) between the chalkboard paper and the appliance.*