



---

HONOR

BLN-L24 EMUI5.0+Android7.0 rollback to  
EMUI4.1+Android 6.0  
Operation instruction




Huawei Technologies Co., Ltd.

All rights reserved

The instruction guides user to roll back from **Android7.0** to **Android 6.0**

- 1) Roll back operation includes **twice SD card update**, only through intermediate package

**BLN-L24C900B300**, like below:

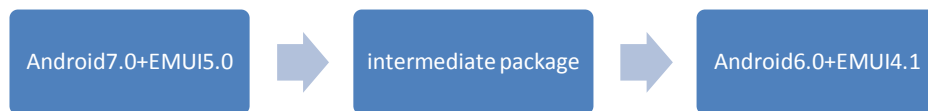

- 2) Allow roll back to Honor official stable release.


### **Precautions:**

1. Make sure the current system version on your phone is an official Honor version based on Android 7.0. If your phone has been updated with a non-official version, the rollback may fail and even cause unexpected problems.
2. Make sure your phone system version has not been unlocked or rooted.
3. Your personal data will be erased during the rollback. Be sure to back up all your important data beforehand.
4. Prepare a micro SD card with available storage space at least 8 GB.
5. Make sure the battery level is higher than 30%.
6. The rollback includes two local ROM flashing procedures, first from Android 7.0 to the intermediate package version and then from the intermediate package version to Android 6.0.

### **Step 1: Back up data.**

Your personal data will be erased during the rollback. Be sure to back up all your important data beforehand.

To back up data to your micro SD card, go to Tools > Backup, touch backup, and follow the onscreen instructions.

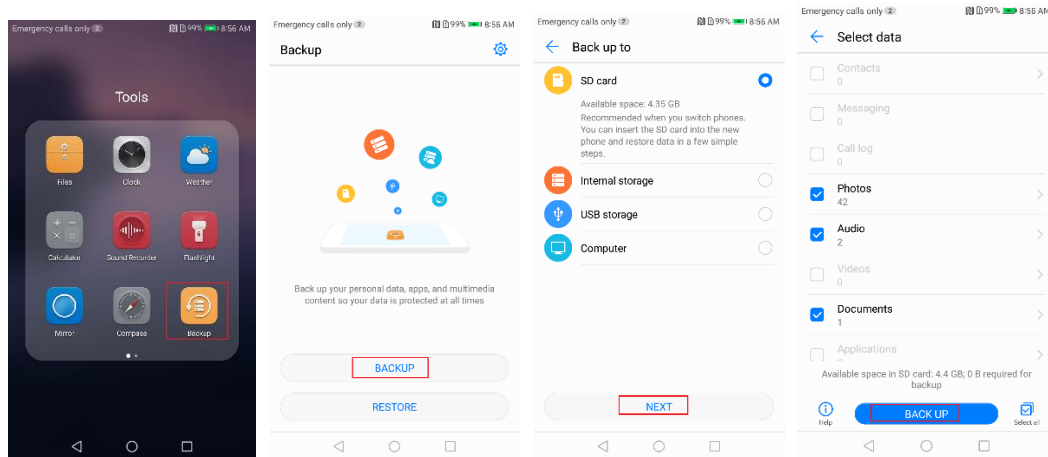


## Step 2: Update your phone to the intermediate package version.

Obtain the BLN-L24 intermediate package (UPDATE.APP) by visiting the official EMUI website or calling the customer service hotline.

Load the UPDATE.APP package to the dload folder under your **micro SD card** root directory. If there is no dload folder under the directory, please create one. **(Do not load the UPDATE.APP package to the internal storage.)**

When the phone is powered off, press and hold the volume up, volume down, and power buttons simultaneously to enter forcible update mode. **Release the buttons only after the rollback starts.** Do not operate the phone during the rollback.

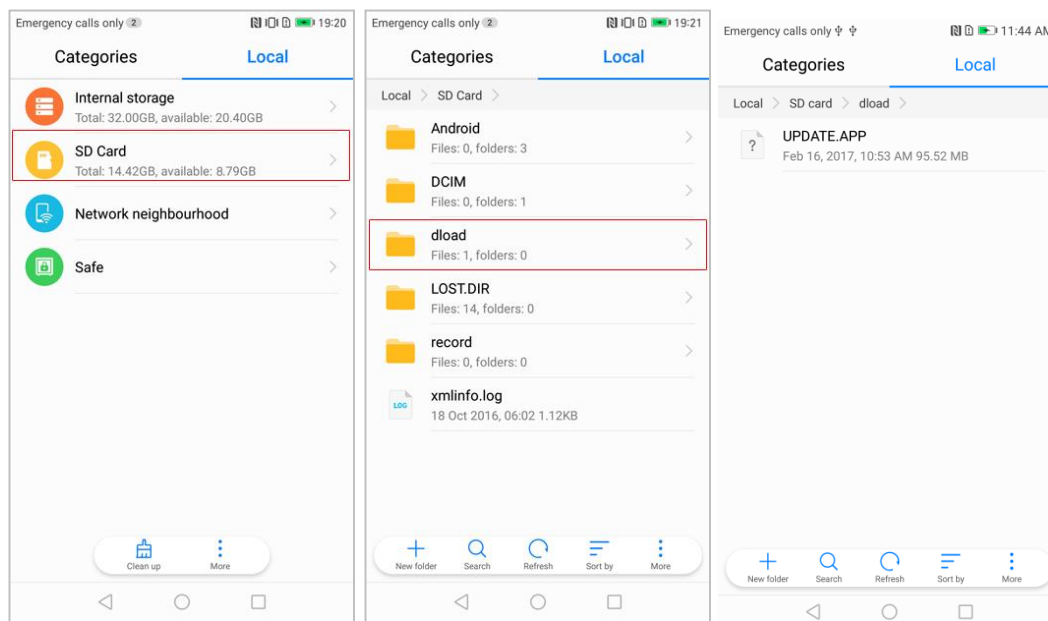


### Step 3: Confirm the intermediate package version.

When the phone is powered on, go to Settings > About phone and check whether the displayed version number contains BLN-L24C900B300.

### Step 4: Update the phone from the intermediate package version to Android 6.0.

Download the Android 6.0 full package (UPDATE.APP) for the BLN-L24 from the EMUI official website. Load the UPDATE.APP package to the dload folder under your **micro SD** card root directory. **(Do not load the UPDATE.APP package to the internal storage.)**

When the phone is powered off, press and hold the volume up, volume down, and power buttons simultaneously to enter forcible update mode. **Release the buttons only after the rollback starts.** Do not operate the phone during the rollback.

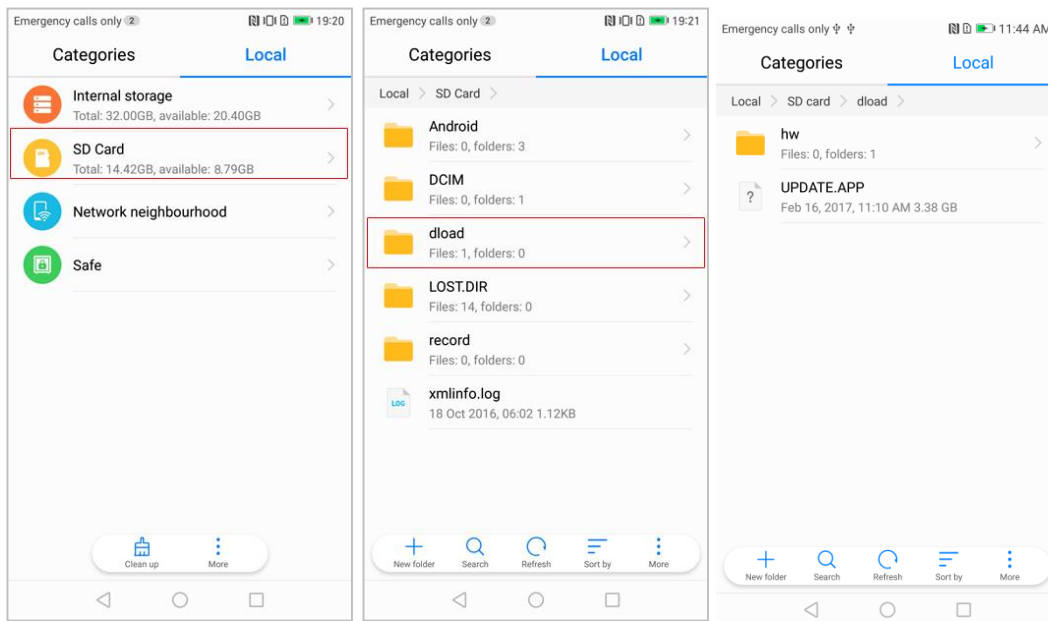

## Step 5: Confirm the system version and restore data.

When the phone is powered on, go to Settings > About phone and check whether the displayed EMUI version is EMUI 4.1 and Android version is 6.0.

Go to Tools > Backup, locate the desired backup record, and follow the onscreen instructions to restore.

