

Quick Start

01 | PRODUCT OVERVIEW



02 | INDICATOR LIGHT STATUS

| Light Color | Light Status | Switch Status |
|-------------|---------------|---|
| Red | | Power On |
| Blue | | OFF |
| Green | Blink quickly | Ready for default configuration mode(Easy Mode) |
| | Blink slowly | Ready for AP mode Configuration |

03 | WARNINGS

- Turn off the power at the circuit breaker and test that power is off before wiring.
- Check supported maximum wattage rating: 1200W.
- Replace single pole switch only; NO NOT compatible with 3-way switch.


04 | INSTALLATION

Note

- Make Sure that the power at the circuit breaker is off before wiring.


- Neutral Wire is required. Confirm the wall box contains a Neutral Wire (typically white). If the wall box doesn't have a Neutral Wire, please try another location in your home or call a professional electrician to install the switch.
- The Wire colors indicated in this manual are the usual colors and may differ in some homes.
- Ensure the wire conductors are securely fastened to each wire.
- Ensure the Wi-Fi signal is strong before wiring.
- If you don't have any wiring experience, please call a professional electrician .

1 Turn on the circuit breaker

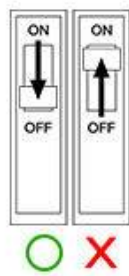


Use the non-contact voltage tester to test the power. Ensure the switch is off before wiring

2 Remove the existing wall plate

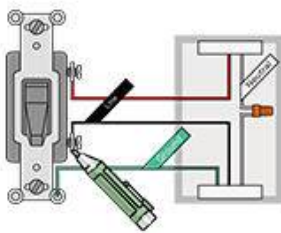

Turn on the power at the circuit breaker and use an electrical tester to check which wire is line wire; the tester will flash and chirp when it comes close to a line wire; Turn off the power at the circuit breaker and use the electrical tester to test if the power is off, and then pull the exist switch out, label the line wire and other wires; discount the wires from the existing switch with pliers (Make sure the existing switch box has a neutral wire*. *Neutral wire is typically white)

3 Wiring

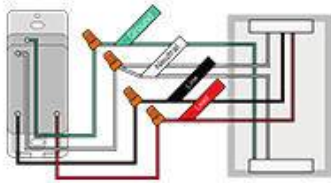


Follow the wiring diagram to connect the switch wires to the wires in the wall box with the wire conductors

4 Snap the switch wall plate




Mount the switch with the provided screws and snap the wall plate on it

5 Turn off the circuit breaker

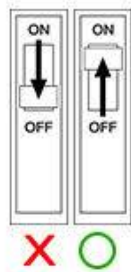

5 Switch on and Connect to Wi-Fi

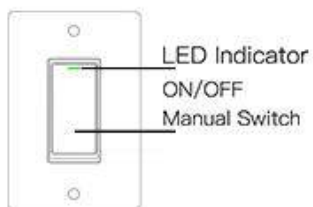

Some warm tips for you:

1. If the indicator doesn't flashing when you power on the switch for the first connection, please hold a 25 seconds press on the switch and see if it starts

flashing;

2. If the smart switch can't be connected to WiFi, please long press ON/OFF button for 25 seconds to reset the switch or change the easy mode to AP mode which is more compatible;

3. The smart switch only works with 2.4 GHz networks. If your router broadcasts both 2.4 and 5GHz, please selected the 2.4GHz network with the app. If the connection still failed, we recommend you call your ISP and had them completely shut off the 5 GHz network on the router; You are free to change the network to 5 GHz again after connecting;

4. Please try to make your smart outlet and router as close as possible when the first connection, you can change the place after connecting successfully.

05 | CONFIGURE THE APP TO THE SWITCH

Preparation:

- [Download Smart Life APP](#)




Please scan the QR code or download Smart Life on App Store or Google Play.

- Ensure the smart light switch has connected with electricity.
- Ensure your phone has connected to the Wi-Fi router and is able to connect the internet.


Note: This smart light switch only supports the 2.4Ghz network. if you have connected 5G network, please disconnect the 5G network and connect with a 2.4G network firstly.

Easy Mode


- Tap the icon "+" on the top right corner to add device; choose "switch(Wi-Fi)".

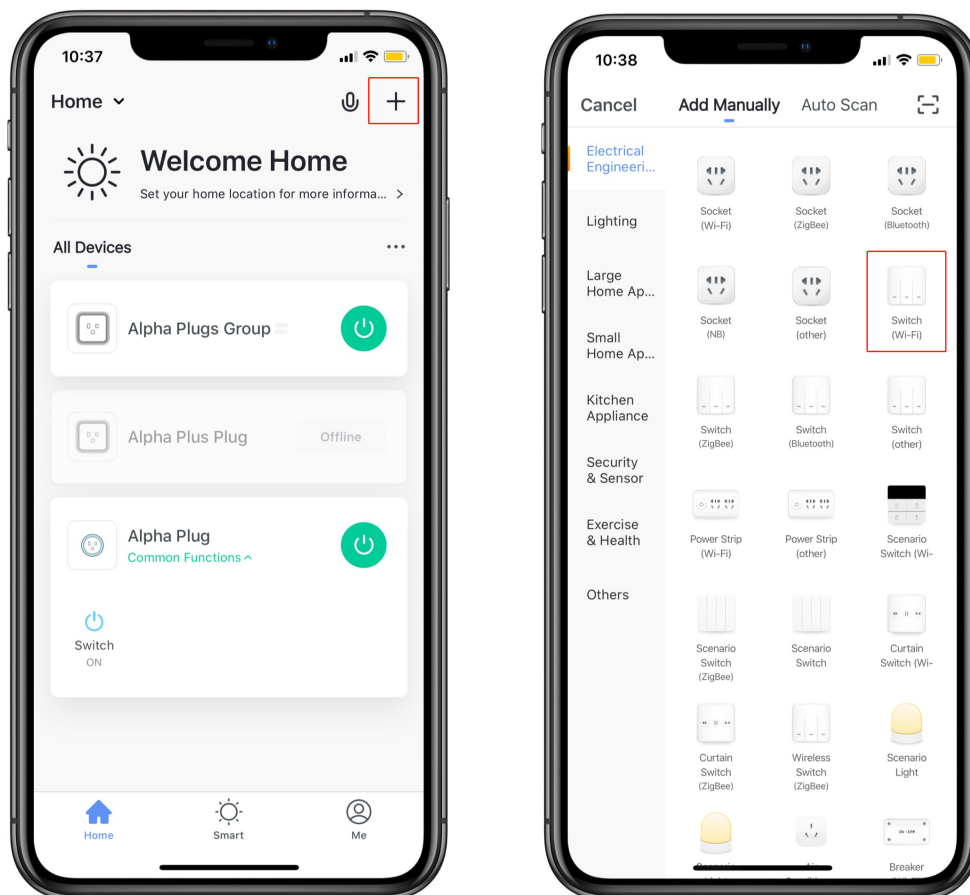



- Confirm indicator rapidly blink. if not, press and hold the manual switch for 25 seconds until the LED indicator light blinks blue quickly.

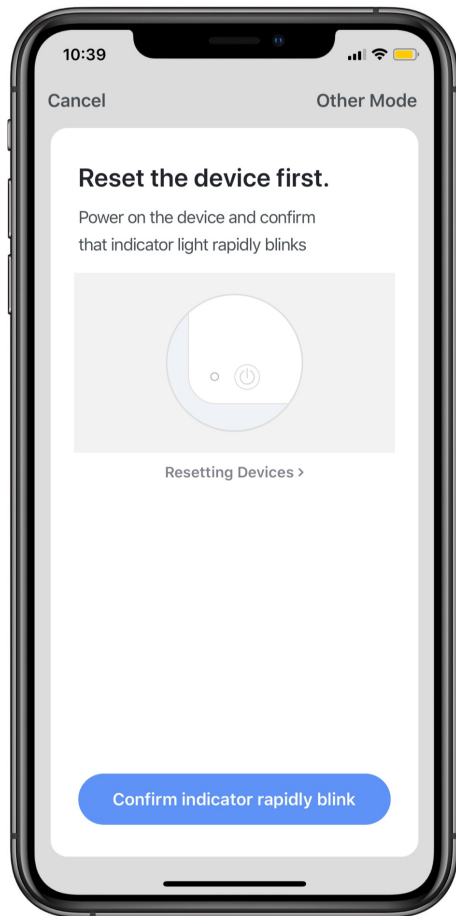


- Tap "Confirm indicator rapidly blink".

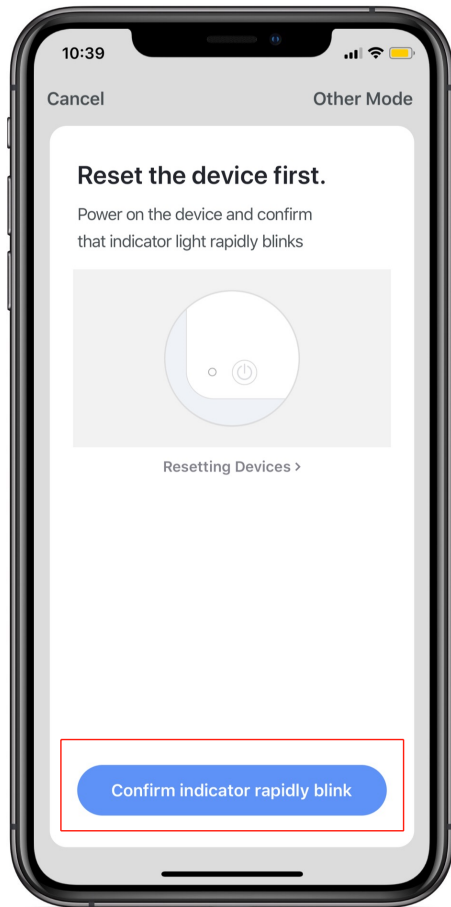

- Enter Wi-Fi Password; wait for completing the connection.(Choose the 2.4G network and enter right password)

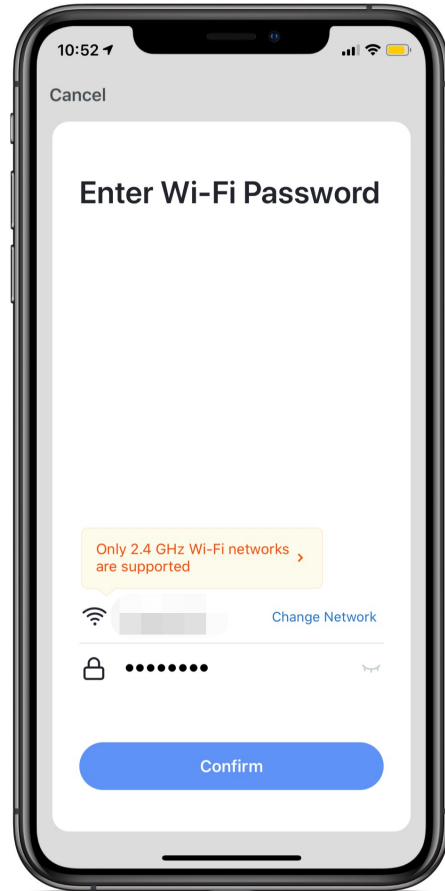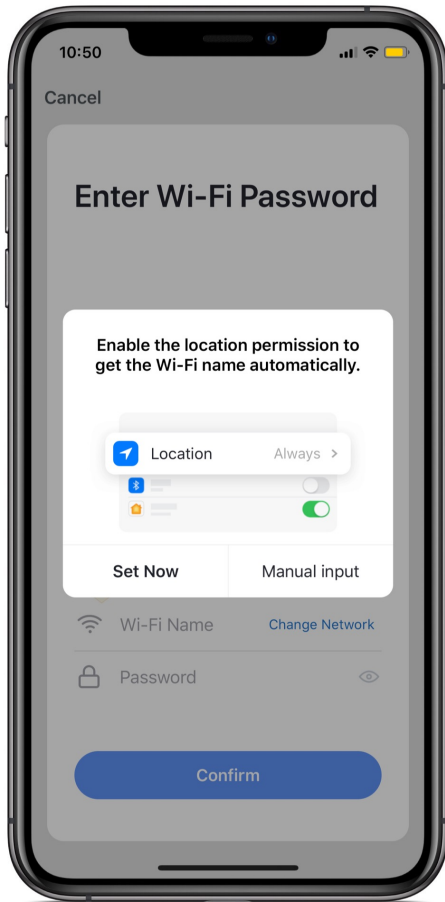



- Device has added successfully.

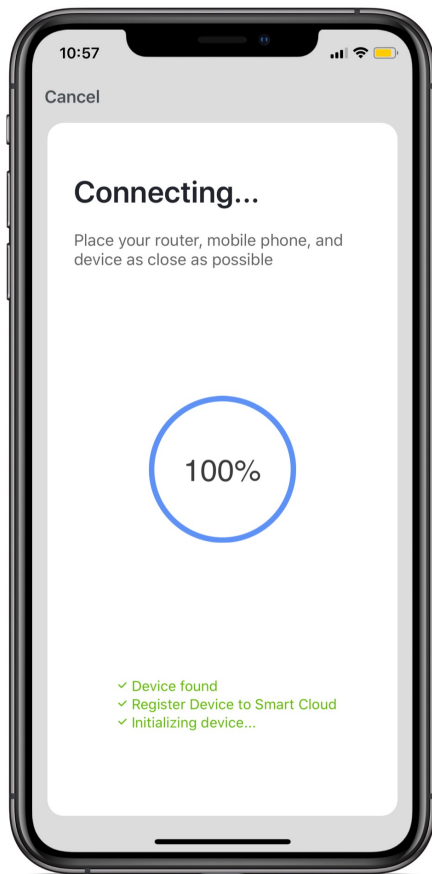



AP Mode

Note:

1. If you can't configure successfully with the Easy Mode(default configure mode), please try to connect with AP Mode.
 2. Make sure indicator light is blink blue slowly.
- Tap the icon "+" on the top right corner to add device; choose "Switch(Wi-Fi)".

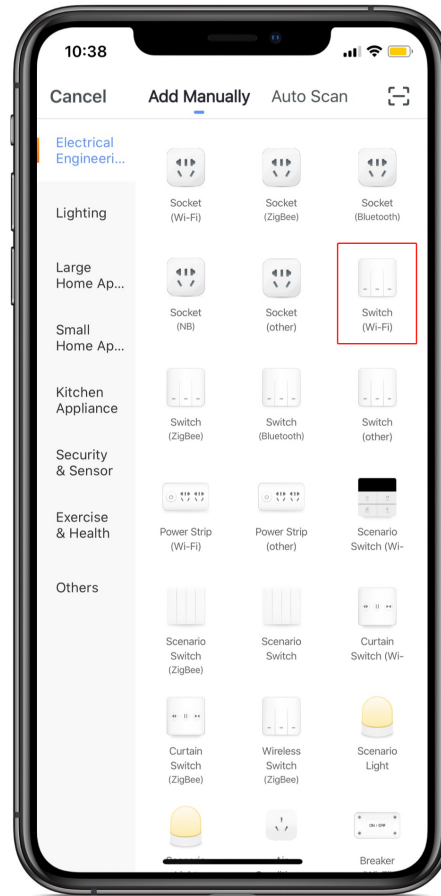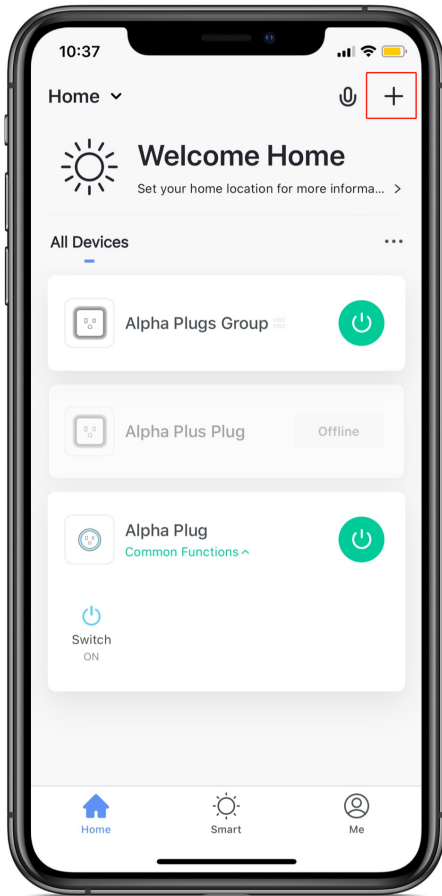

- Tap "AP Mode" on the top right corner.

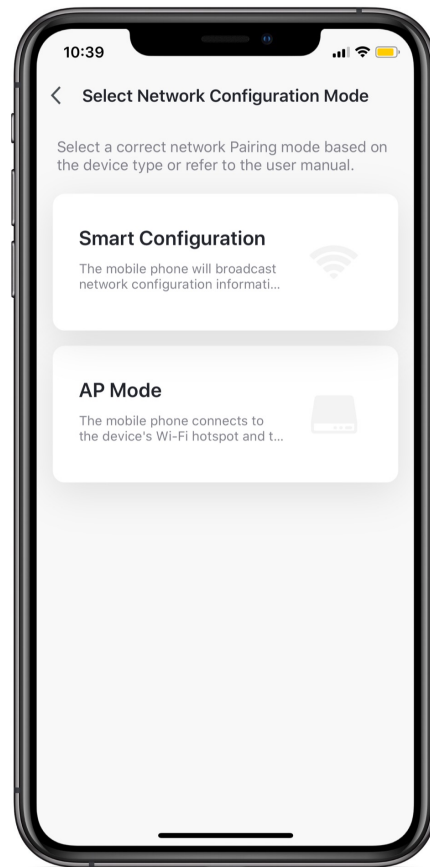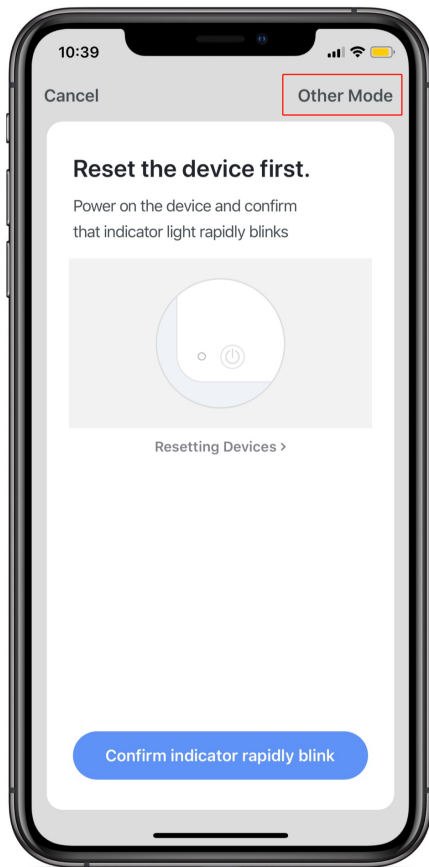


- Press and hold the manual switch for 25 seconds, until the indicator light blink blue slowly(once per 3 seconds).




- Tap "Confirm indicator slowly blink".




- Enter Wi-Fi Password.

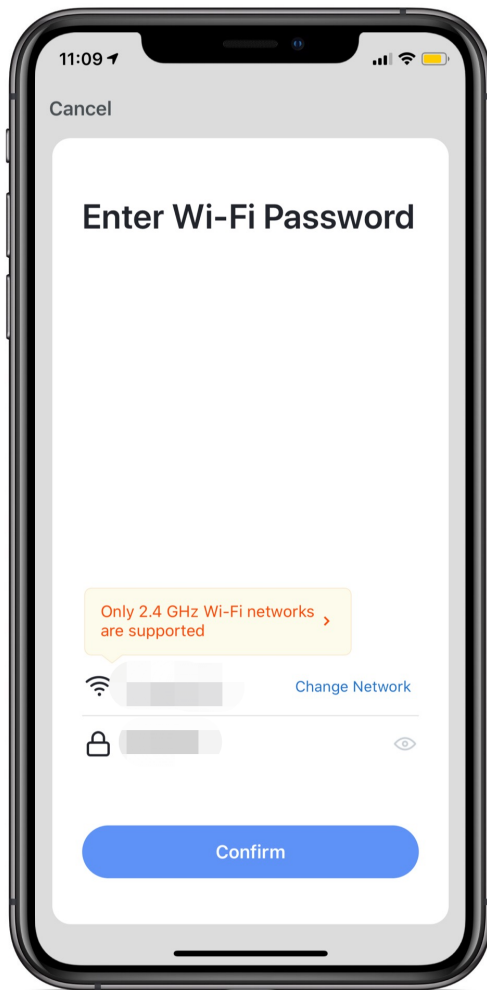

- Open WLAN setting, connect with "SmartLife-xxxx".

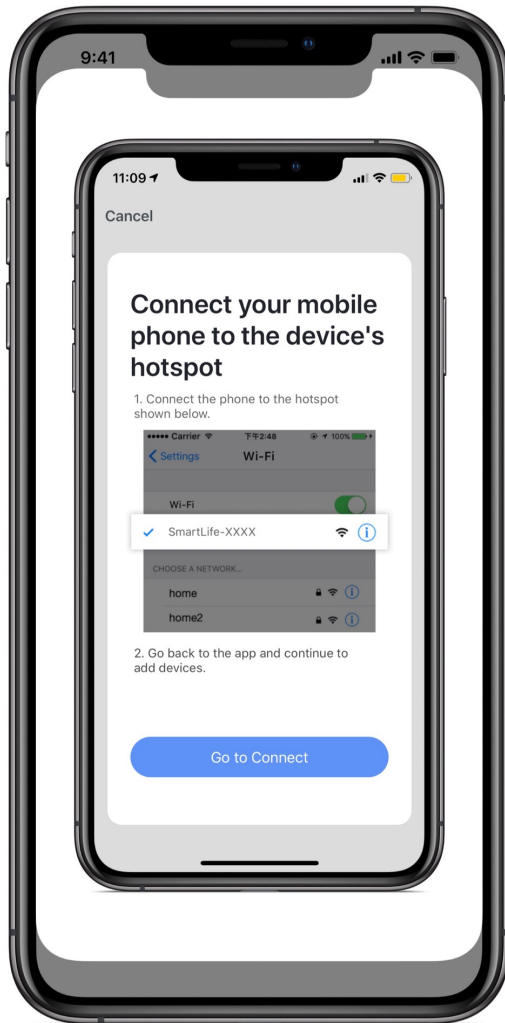

- Back to the app and continue to add the device and wait for completing the connection.

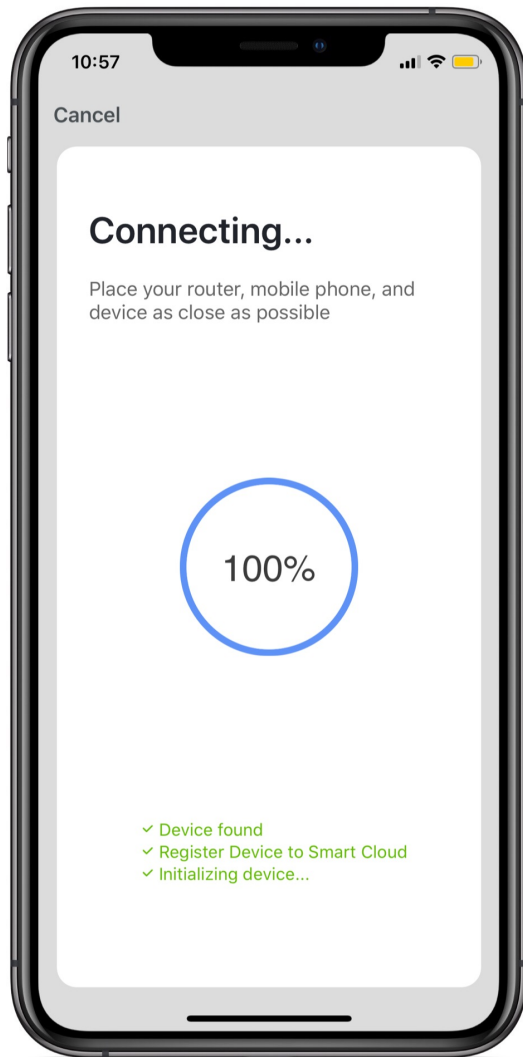

06 | RESET & RESTART

Press and hold the button for 25 seconds until the indicator light blinks rapidly to reset if the switch isn't working - Reset one time (press and hold) to reach Easy Mode (quickly blinking blue) - Reset again (press and hold) to reach AP Mode (Slowly blinking blue)

07 | TROUBLESHOOTING GUIDE

| Possible Problem | Possible Cause | Solution |
|---|---|---|
| The switch can't connect to the APP | Enter wrong Wi-Fi password | Enter the correct Wi-Fi password |
| | Weak Wi-Fi signal | Check router and Wi-Fi signal |
| | Unable to connect to Wi-Fi | Check your router and confirm your Wi-Fi is 2.4G |
| Unable to connect the switch with the phone | The switch is not allowed for connection or the switch has been connected | Press and hold the switch for 25s, the switch will initiate the configuration |
| Unable to turn the switch on/off manually | No electricity | Check the circuit breaker; make sure that the power is restored to the switch |
| | Incorrect wiring | Make sure the switch is wired correctly |
| | The light bulb is broken or is not compatible | Replace the light bulb |
| The switch won't respond to the APP Control | Network delays or is disconnected | Check your network connectivity |
| | Permission is denied by your phone | Grant permission on your phone Settings |
| | The switch is out of order | Manually switch on to check the switch |
| Light bulb is blinking when switched off | Electric leakage occurs or the light bulb and the switch are not compatible | Rewire or replace the light bulb |

8 | SUPPORT

Aoycocr Smart Switch with 90 days unconditional full money-back guarantee, 2-year warranty, and lifetime support

Tech Support : support@aoycocr.com

Facebook Page: <https://www.facebook.com/Aoycocr>