

LED Light Emitter - 24 LEDs - 72 Watts - Extreme Environment - Adjustable Wall Mount - 9-42VDC

Part #: LEDLB-24ET

**Buy American Compliant**

The Larson Electronics LEDLB-24ET LED Light Bar offers high light output and extreme durability combined with a versatile trunnion wall mounting system that provides 270 degrees of adjustability. This IP68 rated LED light bar is waterproof to three meters and produces 4,320 lumens while drawing only 72 watts of power @6 amps from a 12 volt electrical system. This light can run on any voltage from 9 to 42 volts and provides an extremely rugged lighting solution that is ideal for use as commercial exterior lighting, marine lighting, and in industrial and manufacturing applications.

The LEDLB-24ET LED light bar from Larson Electronics produces a 900' long by 100' wide light beam with 4,320 lumens of bright light while drawing only 72 watts @6 amps from a 12 volt electrical system. Twenty-four Edison Edixeon® Emitters containing CREE EZBright® three watt LEDs producing 180 lumens each are arranged in rows and paired with high purity 10 degree optics to produce a tightly focused spot beam with limited spread or light spillage. We also offer optional floodlight versions with 35 degree optics to produce a wider beam spread and more light over a larger area nearer the fixture. Flood versions equipped with our DCP-11 Waterproof Transformer are ideal for wall pack and exterior building or landscape lighting.

These LED light bars are IP68 rated and waterproof to 3 meters, sealed against intrusion by dust and dirt and very ruggedly constructed to withstand the most demanding environments, conditions and applications. The entire Larson Electronics LEDLB series are constructed of extruded aluminum and feature heavier housings, rubber isolated mounts and unbreakable polycarbonate lenses to provide increased durability against vibrations, impacts, waves, hard rains, sand and high winds. This light is equipped with a trunnion mounting bracket that allows operators to adjust the light fixture through 270 degrees of movement.



This photo shows an open field illuminated only by ambient light at approximately 9:00 pm'.

[Click Photo to Enlarge](#)



This image shows the LEDLB-24ET unit illuminating the field, a sign is placed approx. 800 feet away.

[Click Photo to Enlarge](#)



This photo shows a close up on the sign, notice that the actual beam still reaches out farther than the Larson Electronics sign.

[Click Photo to Enlarge](#)


Heat Management: Heat is the single largest factor in premature LED failure and color shifting. As a result, many manufacturers reduce the output of their LEDs to reduce the amount of heat produced. These LED light bars utilize an extruded aluminum housing that incorporates an advanced heat radiating fin design which dissipates heat efficiently to produce the maximum amount of power and longevity from the integrated Edison Edixeon® Emitters. The end result is more light and longer LED life with higher average lumen maintenance after 50,000 hours.

Voltage Control: These units are able to monitor and adjust input current to maintain the correct LED voltage levels regardless of input levels across a specific range. These LEDLB series light bars can operate on current ranging from 9 to 42VDC without any modifications necessary as a result. This multi-voltage capability makes these units ideal for mobile and stand alone applications such as those found on commercial boats, heavy equipment and vehicles where power systems don't always operate with 12 volts and external generators, transformers or inverters are impractical.

**LEDLB-24ET 35° Flood Beam
(Opt)**



**LEDLB-24ET 10° Spot Beam
(Std)**

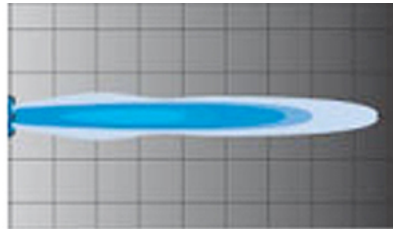

Durability: The LEDLB-E series of LED light bars from Larson Electronics offer IP68 rated construction that is designed to withstand extremes of environmental and operating conditions. These units can withstand rapid temperature changes of -40 degrees Celsius to 85 degrees Celsius, are waterproof to three meters and resist ingress of dust, dirt and humidity. The housings are formed from thick extruded aluminum and the lenses are unbreakable polycarbonate. The CREE EZBright® LEDs offer inherent LED resistance to shocks and vibrations contributing to these units 15.6Grms rating of vibration tolerance. We recommend these LED lights for high stress - high vibratory conditions, high humidity climates, very cold areas and rough saltwater conditions. They are also well suited to environments where equipment is used in one temperature extreme and stored in another temperature extreme.

Adjustable Mounting: The trunnion wall mounting design on the LEDLB-24ET allows for post-installation angle positioning. This means that by loosening 2 thumb bolts located on either side of the light, the operator can adjust the positioning angle of this light 270 degrees. Then he/she would simply have to tighten thumb bolts to lock the angle in place. No tools are required for adjusting angle. We also offer a BC-2 bar clamp mounting system [you can view here](#) for even greater mounting versatility.

Note: Most Larson Electronics LEDLB, LEDP3W, LEDP10W, and LED10W series LED spotlights and floodlights are terminated with a Deutsch IPD / LADD DT04-2P connector. The mating connector plug is DT06-2S. Most LEDLB and LED10W series lights ship with mating connector as part of a harness or pigtail, depending on the model. Some larger LED lights like the LEDLB-160X2 or LEDLB-200X2 or multiple function LED lights (i.e. high/low beam, modulating, IR/Visible combos) will have different Deutsch connectors.

Specifications / Additional Information**LEDLB-24ET LED Light Bar****LEDs:** 24 Edixeon® 3 Watt LED Emitters**Dimensions:** 8.25 "-L 5.25 "-H 3.56"-D**Watts:** 72**Voltage:** 9-46 VDC**Weight:** 7.75 Lbs**Lighting Configuration:** 10° Spot or 35° Flood**Mounting:** Trunnion Bracket**Wiring:** Deutsch IPD / LADD DT04-2P connector**Amps:** 6 (on 12 volts) 3 (on 24 volts)**Lumens:** 4,320**LED Light Color:** 6000K, 4500K or 3000K**LED Life Expectancy:** 50,000 hours**Optics Efficiency:** 90%**Materials:** Aluminum Housing, Polycarbonate Lens**Housing Colors:** Black or White**Lux Readings 10' increments:** 10' - 4,450, 20' - 1,175, 30' - 525, 40' - 275, 50' - 182, 60' - 115, 70' - 82, 80' - 62, 90' - 42, 100' - 36, 110' - 30**CE Certified**

3 year warranty replacement on this LED light. After 30 days, the customer ships the failed LED light and/or LED bulb to Larson Electronics at their expense. If the failure is a manufacturer defect, we will ship a new replacement to the customer. If failure occurs within 30 days of receipt, Larson Electronics will provide a return label via email to the customer. When the failed light is returned, Larson Electronics will ship a new replacement.

Scroll Down to Purchase-**Part #: LEDLB-24ET (46869)****LEDLB LED Features**

Edixeon® 3 Watt LED Emitters

LEDs Driven At 80%

-40 C~ +80C Operating Temp Range

RoHS Compliant

70% Lumen Retention @65,000 hours

LED Chip Op Temp -40C to +125C

IP68 Rated Waterproof to 3 meters

Special Orders- Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671**Intl:** 1-903-498-3363**E-mail:** sales@larsonelectronics.com



Links (Click on the below items to view):

- [SpecSheet French](#)
- [SpecSheet Arabic](#)
- [SpecSheet Spanish](#)
- [Dimensional Drawing](#)
- [Manual](#)



- SpectrumChart

- STEP